

SMARTER LIGHTING CHOICES



SAL Lighting a Smarter Future  



2026/28





A creative selection of exterior LED architectural wall, bollard and post top luminaires, ideal for residential and commercial spaces.



A creative selection of exterior LED architectural wall, bollard and post top luminaires, ideal for residential and commercial spaces.





TC SELECTABLE COLOUR

AFFINITY SE7359TC – 8W

Dimmable, 8 watt LED circular profile,
IP65 wall mount with selectable CCT

Application


Residential or commercial feature
walkways and facades

Design Specifications

- Stylish, indirect optical design
- Durable aluminium circular profile,
choice of white or black
- IP65 for interior or exterior use
- Integral flickerCONTROLLED LED
control gear
- Selectable CCT, CRI>80
- IK06, IP65 performance



Dimensions

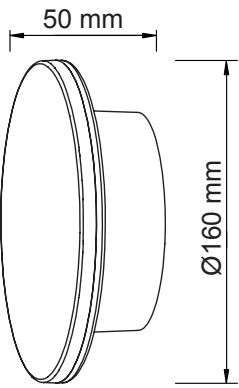

Performance


- Dimmable



Photometric Data

SE7359TC at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7359TC/WH	240/50	8	530/600/590	3000/4000/5700	90°	White	Ø160 x 50
SE7359TC/BK	240/50	8	530/600/590	3000/4000/5700	90°	Black	Ø160 x 50



TC SELECTABLE COLOUR

AFFINITY SE7360TC – 15W


Dimmable, 15 watt LED circular profile,
IP65 wall mount with selectable CCT

Application


Residential or commercial feature
walkways and facades

Design Specifications

- Stylish, indirect optical design
- Durable aluminium circular profile,
choice of white or black
- IP65 for interior or exterior use
- Integral flickerCONTROLLED LED
control gear
- Selectable CCT, CRI>80
- IK06, IP65 performance

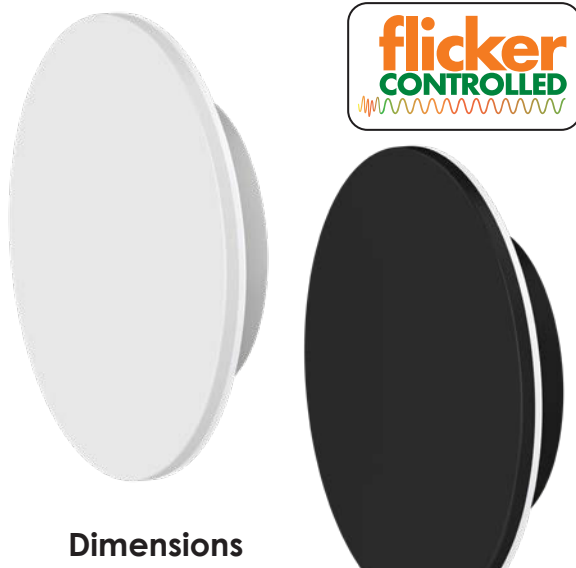

Dimensions

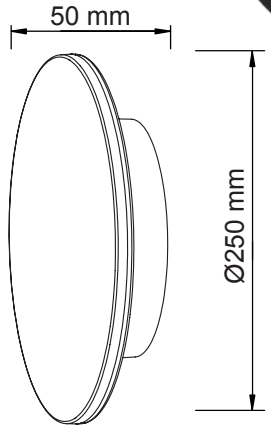

Performance


- Dimmable



Photometric Data

SE7360TC at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7360TC/WH	240/50	15	1100/1200/1150	3000/4000/5700	90°	White	Ø250 x 50
SE7360TC/BK	240/50	15	1100/1200/1150	3000/4000/5700	90°	Black	Ø250 x 50

For terms of catalogue data use, refer to INDEX



ALTONA
SE7356 – 5W

LED 5 watt surface mount, circular profile, wall luminaire.

Application


Residential stairs, walkways and interior or exterior commercial features

Design Specifications

- Durable aluminium body profile
- Matt black powder coat finish
- High efficiency LED optics
- CCT choice of 3000K or 5000K
- Beam distribution 60°
- Integral LED control gear
- IK08, IP65 performance



Dimensions

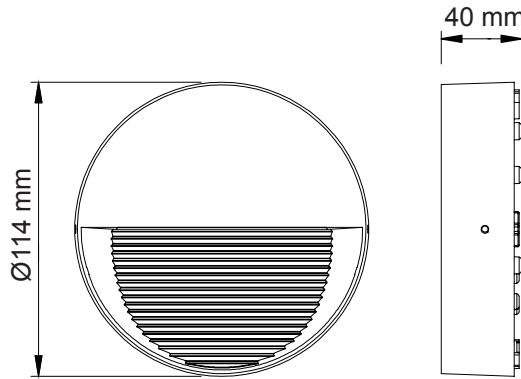


Performance

- Non-dimmable



Photometric Data SE7356WW at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7356WW/BK	240/50	5	150	3000	> 80	60°	Black	Ø114 x 40
SE7356NDL/BK	240/50	5	220	5000	> 80	60°	Black	Ø114 x 40



ALTONA PLUS
SE7357 – 8W

LED 8 watt surface mount, circular profile, wall luminaire.

Application


Residential stairs, walkways and interior or exterior commercial features

Design Specifications

- Durable aluminium body profile
- Matt black powder coat finish
- High efficiency LED optics
- CCT choice of 3000K or 5000K
- Beam distribution 60°
- Integral LED control gear
- IK08, IP65 performance



Dimensions

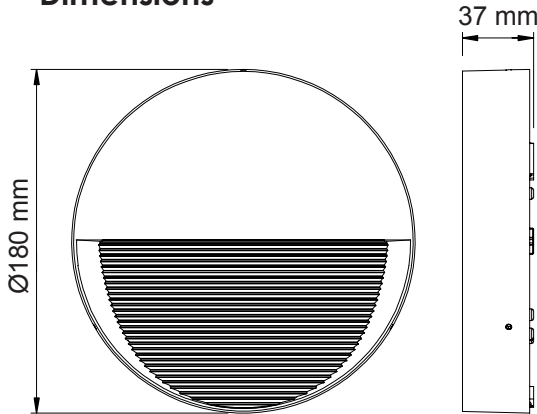


Performance

- Non-dimmable



Photometric Data SE7357WW at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7357WW/BK	240/50	8	350	3000	> 80	60°	Black	Ø180 x 37
SE7357NDL/BK	240/50	8	500	5000	> 80	60°	Black	Ø180 x 37

For terms of catalogue data use, refer to INDEX



**ALTONA-S PLUS
SE7358 – 5W**

LED 5 watt surface mount, square profile, wall luminaire.

Application

Residential stairs, walkways and interior or exterior commercial features

Design Specifications


- Durable aluminium body profile
- Matt black powder coat finish
- High efficiency LED optics
- CCT choice of 3000K or 5000K
- Beam distribution 70°
- Integral control gear
- IK08, IP65 performance

Performance

- Non-dimmable




Dimensions

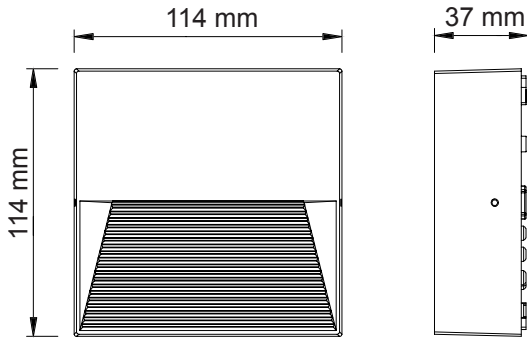

Photometric Data SE7358WW at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SE7358WW/BK	240/50	5	150	3000	> 80	70°	Black	114 x 114 x 37
SE7358NDL/BK	240/50	5	220	5000	> 80	70°	Black	114 x 114 x 37



**ANGLE
SE7088 - 18W**

IP65 LED architectural adjustable surface mount luminaire

Application

A decorative residential exterior or interior solution

Design Specifications


- Die-cast aluminium body and powder coated body profile
- Clear tempered glass cover
- High efficiency LED optics
- High performance multifaceted reflector system
- Integral non-dimmable LED driver
- Adjustable head 0~90° rotation

Performance

- Non-dimmable



Dimensions

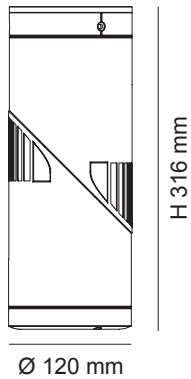

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SE7088 BK	240/50	18	1500	3000	> 80	40°	Black
SE7088 CB	240/50	18	1500	3000	> 80	40°	Charcoal Black

For terms of catalogue data use, refer to INDEX

TC SELECTABLE COLOUR

flicker
CONTROLLED

BARGO SE7355L/TC/BK - 14W

LED 14 watt surface mount, rectangular profile wall luminaire with selectable CCT

Application

Residential walkways, exterior facades, interior commercial features

Design Specifications


- Durable aluminium body profile
- Matt black powder coat finish (RAL9005)
- High efficiency LED optics, opal polycarbonate diffuser
- Selectable CCT 3000/4000/6000K
- Beam distribution 160°
- Integral flickerCONTROLLED 14 watt control gear, IK06, IP54 performance

Performance

- Non-dimmable



Dimensions

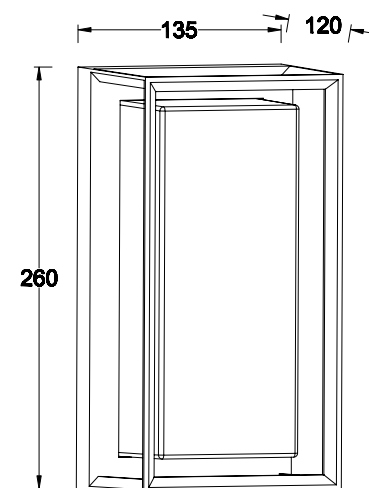

Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SE7355L/TC/BK	240/50	14	900/1000/950	3000/4000/6000	160°	Black	135 x 120 x 260

Guide to outdoor lighting conductor termination


The following guide addresses a common water ingress fault, where moisture and air enters through the cable structure with IP65/IP66/IP67/IP68 lighting products.

So what is the problem?


Well it is all in the science. When a luminaire operates, the inside temperature increases and when it is turned off, the temperature naturally returns to its original static position. This process in turn creates thermal expansion and contraction, resulting in a difference between the inside and outside air pressure of the product. Thus creating a siphon effect, resulting in moisture and air infiltrating the luminaire housing, commonly through the cable structure when the internal air pressure is lower than the external environment.



Exposed open Air




Underground



Underwater


Common examples of incorrect terminations



single insulation exposed




using water-proof tape

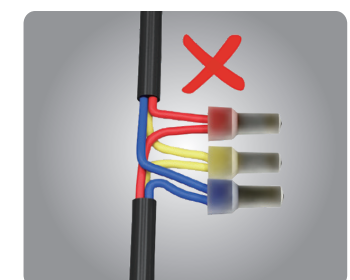

terminations exposed

What is the solution? easy, use a water-proof connector, which maintains the products **designated IP rating** as follows.



Plug and play inline



Plug & play boxes



Multi port boxes

For safety, all electrical work should be conducted by an authorised electrical installer.



BOLLARD
SE7102/LGLS

LED bollard, E27 lamp base

BOLLARD
SLA7102

LED bollard, integral control gear

Application

A stylish design, ideal for residential exterior garden and pathway spaces

Design Specifications

- Die-cast aluminium body, base plate mounting design, rag bolts excluded
- Durable powder coated black or silver finish
- Clear polycarbonate diffuser
- Lamp options for SE7102 series LG5, LG9, LGS4, LGS8, LGS10, LGS14, LT407, LT409, LT4012, LT4014
- IK10, IP54 performance

Performance

- Dimmable - Refer lamp options




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SE7102 BK/LGLS	240/50	18	1200	6000	> 80	Black
SE7102 SL/LGLS	240/50	18	1200	6000	> 80	Silver
SLA7102BK	Refer to the Lamp section of this catalogue					Black
SLA7102SL	Refer to the Lamp section of this catalogue					Silver



SE7102 BK/LGLS SE7102 SL/LGLS SLA7102BK SLA7102SL

Dimensions

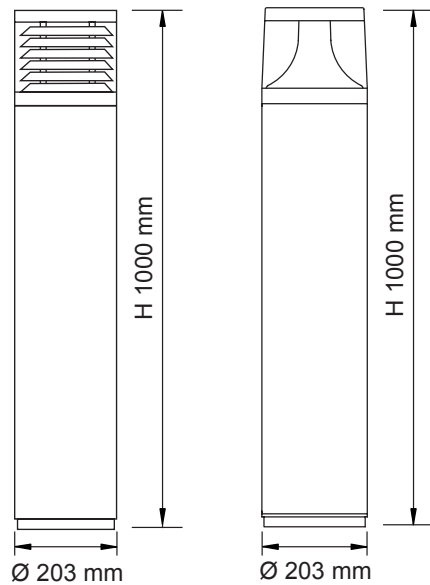

BOLLARD
SE7103 /LGLS
SE7104 /LGLS
SE7105 /LGLS
SE7106 /LGLS

Circular IP54 bollard, E27 lamp base

Application

Ideal for residential or apartment exterior pathways

Design Specifications

- Die-cast aluminium body, base plate mounting design, rag bolts excluded
- Durable black powder coated finish
- Polycarbonate diffuser
- E27 lamp base, lamps to order
- Lamp options - LG5, LG9, LGS4, LGS8, LGS10, LGS14, LT407, LT409, LT4012, LT4014
- IK10, IP54 performance

Performance

- Dimmable - Refer model No.



Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SE7103BK/LGLS	Refer to the Lamp section of this catalogue					Black
SE7104BK/LGLS						Black
SE7105BK/LGLS						Black
SE7106BK/LGLS						Black

For terms of catalogue data use, refer to INDEX



SE7103BK/LGLS SE7104BK/LGLS SE7105BK/LGLS SE7106BK/LGLS

Dimensions

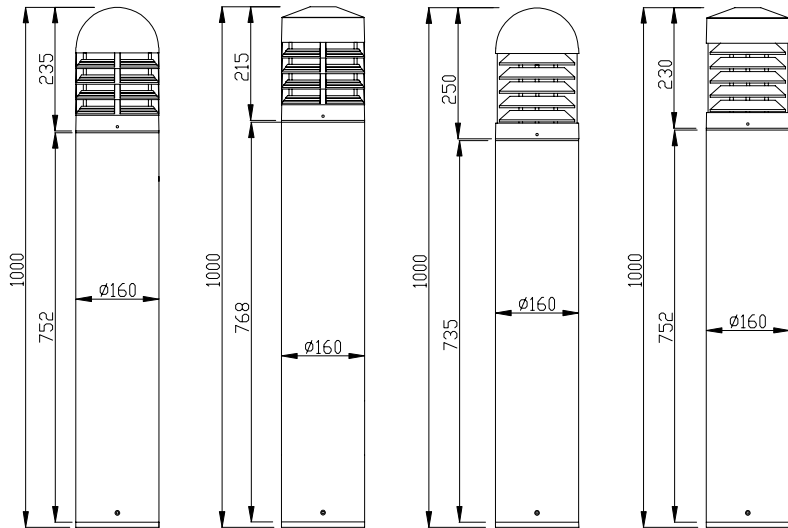



BOLLARD – DOME
SL7088DC TC - 10W

Dome profile, IP65 circular bollard, integral LED control gear with selectable CCT

Application

Ideal for residential or apartment exterior pathways

Design Specifications

- Die-cast aluminium body, dome profile design
- Base plate mounting, rag bolts excluded
- Durable black powder coated finish
- Clear polycarbonate lens
- High efficiency LED optics
- Integral LED control gear
- IP65, IK08 performance
- SL7088DC50TC - 120mm Ø, 670mm height
- SL7088DC85TC - 120mm Ø, 1020mm height

Performance

- Non-dimmable




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SL7088DC50TC/BK	240/50	10	725/760/740	3000/4000/5000	250°	Black	Ø120 x H670
SL7088DC85TC/BK	240/50	10	725/760/740	3000/4000/5000	250°	Black	Ø120 x H1020



Photometric Data SL7088DC50TC/BK at 3000K

Unit: cd C0/C180 C90/C270



BOLLARD – FLAT
SL7088FC TC - 10W

Flat profile, IP65 circular bollard, integral LED control gear with selectable CCT

Application

Ideal for residential or apartment exterior pathways

Design Specifications

- Die-cast aluminium body, flat top profile design
- Base plate mounting, rag bolts excluded
- Durable black powder coated finish
- Clear polycarbonate lens
- High efficiency LED optics
- Integral LED control gear
- IP65, IK08 performance
- SL7088FC50TC - 120mm Ø, 640mm height
- SL7088FC85TC - 120mm Ø, 990mm height

Performance

- Non-dimmable




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SL7088FC50TC/BK	240/50	10	725/760/740	3000/4000/5000	250°	Black	Ø120 x H640
SL7088FC85TC/BK	240/50	10	725/760/740	3000/4000/5000	250°	Black	Ø120 x H990



Photometric Data SL7088FC50TC/BK at 3000K

Unit: cd C0/C180 C90/C270





TC SELECTABLE COLOUR

BONDI
SE7121TC - 4W
SE7122TC - 2 X 4W
SE7123TC - 4W

IP65 LED architectural wall luminaires,
selectable CCT with GU10 4 watt
lamp/s included

Application

A decorative residential exterior
or interior solution

Design Specifications

- Machined 316L stainless steel or cast aluminium body with a white or black powder coat or stainless finish
- 240V termination
- Clear tempered glass cover
- Selectable CCT GU10 4 watt lamp/s included CCT 3000 / 4000 / 6000K
- Beam distribution 50°
- SE7121TC downward light distribution
- SE7122TC up/down light distribution
- SE7123TC adjustable arm




Performance

- Non-dimmable



TC SELECTABLE COLOUR

Dimensions

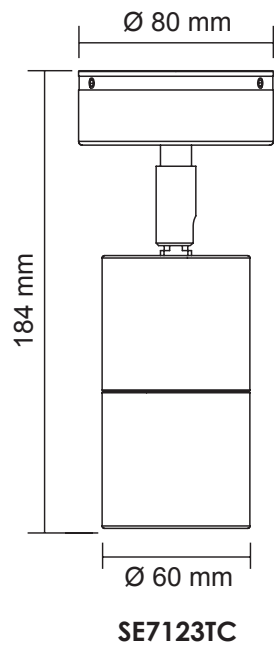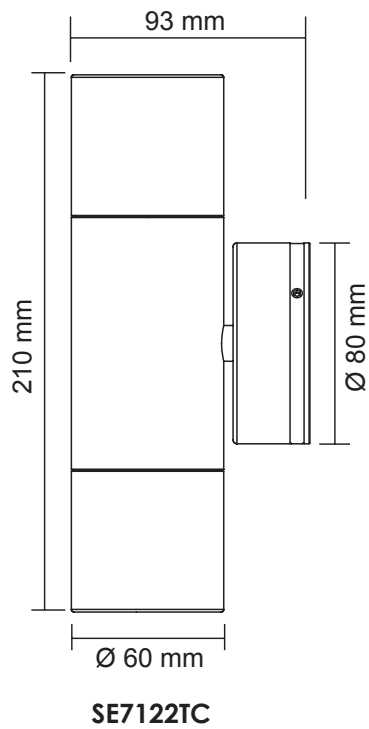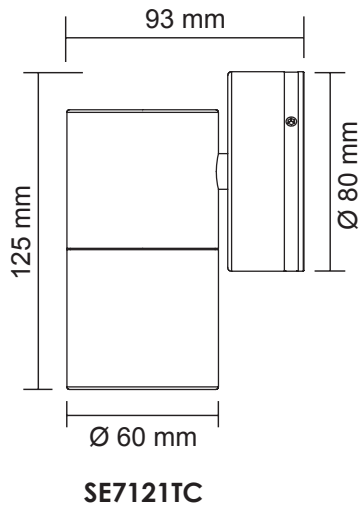

Technical Specifications

Model No.	Input (V)/(Hz)	Material	Fitting Colour
SE7121TC/SLS	240/50	Machined 316L stainless steel	Stainless Steel
SE7121TC/BK	240/50	Die cast aluminium	Black
SE7121TC/WH	240/50	Die cast aluminium	White
SE7121TC/AST	240/50	Die cast aluminium/stainless finish	Aluminium - Stainless
SE7122TC/SLS	240/50	Machined 316L stainless steel	Stainless Steel
SE7122TC/BK	240/50	Die cast aluminium	Black
SE7122TC/WH	240/50	Die cast aluminium	White
SE7122TC/AST	240/50	Die cast aluminium/stainless finish	Aluminium - Stainless
SE7123TC/SLS	240/50	Machined 316L stainless steel	Stainless Steel
SE7123TC/BK	240/50	Die cast aluminium	Black
SE7123TC/WH	240/50	Die cast aluminium	White
SE7123TC/AST	240/50	Die cast aluminium/stainless finish	Aluminium - Stainless

For terms of catalogue data use, refer to INDEX



BONDI DZINE S SE7121TC/AB - 4W

BONDI DZINE T SE7122TC/AB - 2 X 4W

BONDI DZINE SA SE7123TC/AB - 4W

BONDI DZINE TA SE7124TC/AB - 2 X 4W

Antique Brass, IP65 LED architectural
GU10 adjustable wall luminaire with
selectable CCT 4 watt lamp

Application

A decorative residential exterior
or interior solution

Design Specifications

- Decorative solid Antique Brass finish
- 240V termination
- Clear tempered glass cover
- Selectable CCT GU10 4 watt lamp/s
included, CCT 3000 / 4000 / 6000K
- Beam distribution 50°
- SE7121TC down light distribution
- SE7122TC up/down distribution
- SE7123TC adjustable arm
- SE7124TC twin adjustable arms

Performance



- Non-dimmable



SE7121TC/AB





SE7122TC/AB

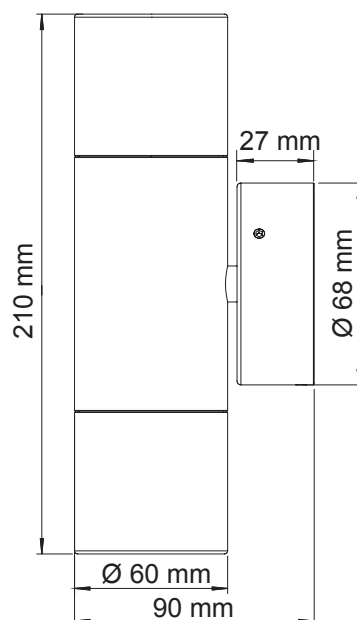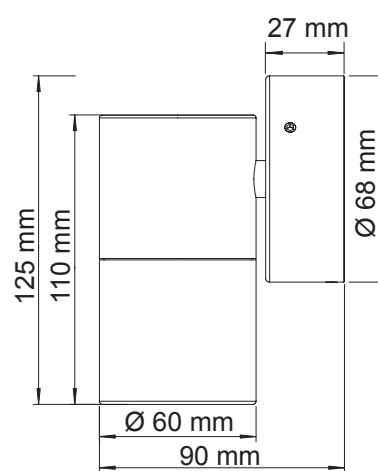

SE7123TC/AB



SE7124TC/AB

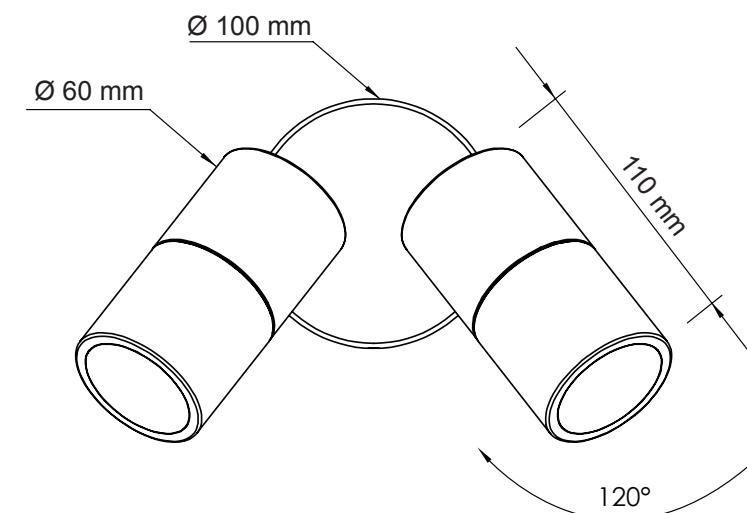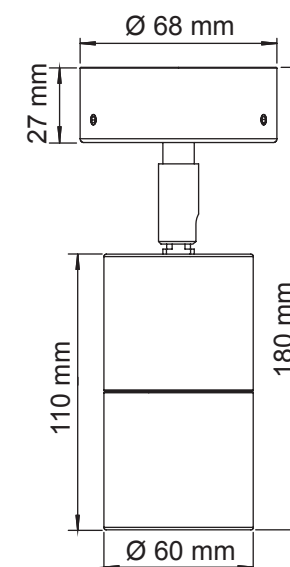

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Lamp Base
SE7121TC/AB	240/50	4	360/400/380	3000/4000/6000	> 80	Antique Brass	GU10
SE7122TC/AB	240/50	2 x 4	2 x 360/400/380	3000/4000/6000	> 80	Antique Brass	GU10
SE7123TC/AB	240/50	4	360/400/380	3000/4000/6000	> 80	Antique Brass	GU10
SE7124TC/AB	240/50	2 x 4	2 x 360/400/380	3000/4000/6000	> 80	Antique Brass	GU10

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

BONDI II
SL7321TC - 5W
SL7322TC - 2 X 5W
SL7323TC - 5W

IP65 LED architectural wall luminaires

Application

A decorative residential / commercial exterior or interior solution

Design Specifications

- Machined 316L stainless steel or cast aluminium body with a black powder coat or a stainless finish
- Clear tempered glass cover
- High efficiency LED optics, beam distribution 36°
- Integral non-dimmable LED driver
- SL7321TC downward light distribution
- SL7322TC up/down light distribution
- SL7323TC adjustable arm

Performance

- Non-dimmable



SL7321TC/SLS

SL7321TC/BK

SL7321TC/AST



SL7322TC/SLS

SL7322TC/BK

SL7322TC/AST



SL7323TC/SLS


SL7323TC/BK

SL7323TC/AST




TC SELECTABLE COLOUR


Dimensions

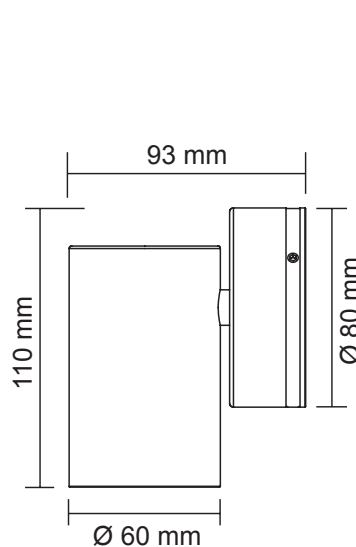

SL7321TC

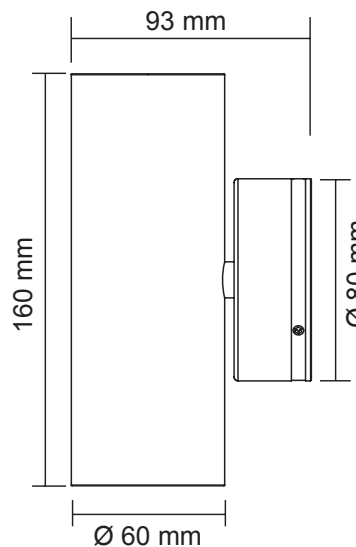

SL7322TC

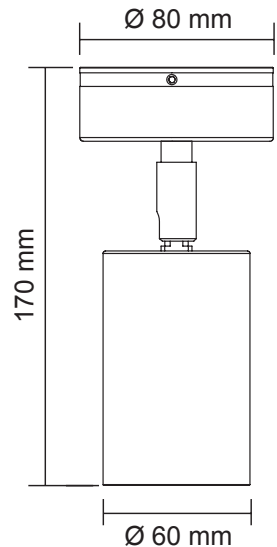

SL7323TC

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SL7321TC/SLS	240/50	5	370/410/390	3000/4000/6000	> 80	Stainless Steel
SL7321TC/BK	240/50	5	370/410/390	3000/4000/6000	> 80	Black
SL7321TC/AST	240/50	5	370/410/390	3000/4000/6000	> 80	Aluminium - Stainless
SL7322TC/SLS	240/50	2 x 5	2 x 370/410/390	3000/4000/6000	> 80	Stainless Steel
SL7322TC/BK	240/50	2 x 5	2 x 370/410/390	3000/4000/6000	> 80	Black
SL7322TC/AST	240/50	2 x 5	2 x 370/410/390	3000/4000/6000	> 80	Aluminium - Stainless
SL7323TC/SLS	240/50	5	370/410/390	3000/4000/6000	> 80	Stainless Steel
SL7323TC/BK	240/50	5	370/410/390	3000/4000/6000	> 80	Black
SL7323TC/AST	240/50	5	370/410/390	3000/4000/6000	> 80	Aluminium - Stainless

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

BONDI LITE
SE7321TC - 4W
SE7322TC - 2 X 4W
SE7323TC - 4W

IP65 LED architectural wall luminaires,
with GU10 4 watt lamp/s included

Application

A decorative residential exterior
coastal environments or interior spaces

Design Specifications

- Robust reinforced nylon body construction
- Stylish black finish
- Clear tempered glass cover
- Beam distribution 50°
- Selectable CCT GU10 4 watt lamp/s included
CCT 3000 / 4000 / 6000K
- SE7321TC downward light distribution
- SE7322TC up/down light distribution
- SE7323TC adjustable arm
- IP65, IK08 performance


Performance

- Non-dimmable



SE7321TC/BK


Dimensions

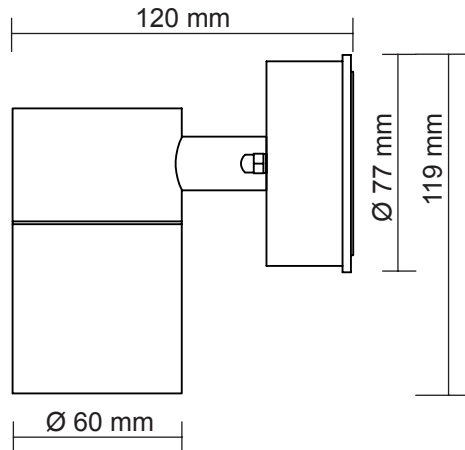

Photometric Data

SE7321TC at 3000K

Unit: cd C0/C180 C90/C270





TC SELECTABLE COLOUR



SE7322TC/BK



SE7323TC/BK

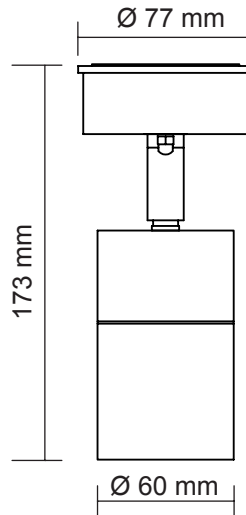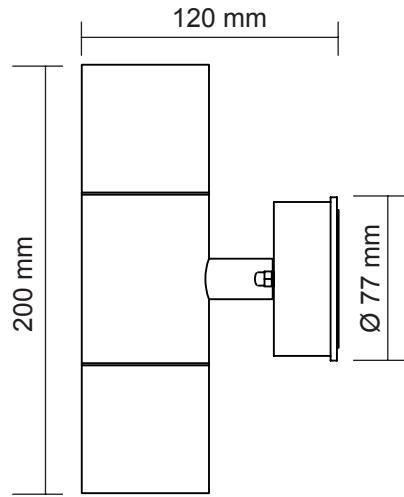

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Lamp Base
SE7321TC/BK	240/50	4	360/400/380	3000/4000/6000	> 80	Black	GU10
SE7322TC/BK	240/50	2 x 4	2 x 360/400/380	3000/4000/6000	> 80	Black	GU10
SE7323TC/BK	240/50	4	360/400/380	3000/4000/6000	> 80	Black	GU10

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

CARINA SE7150 /10TC - 10W

Low profile, 10 watt LED wall mount luminaire, with selectable CCT

Application

Residential and commercial interior and exterior wall features

Design Specifications


- Durable aluminium body profile
- Matt black or white powder coat finish
- High efficiency LED optics
- Selectable CCT 3000 / 4000 / 5700K
- Precise UP/DOWN beam distribution 8°
- Integral control gear
- IP65, IK08 performance

Performance

- Non-dimmable



Dimensions

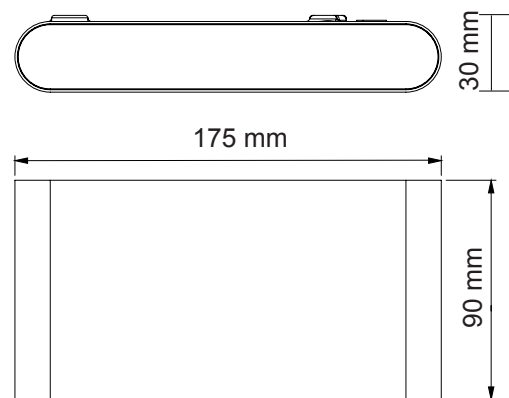

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SE7150/10TC/WH	240/50	10	950/1050/1000	3000/4000/5700	> 80	White
SE7150/10TC/BK	240/50	10	950/1050/1000	3000/4000/5700	> 80	Black



Why is the IP rating of a luminaire so important?

IP (Ingress Protection) ratings are found in AS60529 and simply define the ability of an electrical product to seal and protect against the intrusion of foreign objects and water.



How does the rating system work?

Two numerals determine the rating, the first numeral stands for **(I)** intrusion of a foreign object, where the second numeral stands for **(P)** penetration of moisture. As a guide **IP20** rated products would be found in interior spaces with no requirement for protection against the elements, where an **IP65** product would be found in an exterior application, which requires substantial protection against the elements.

First Digit	Intrusion Protection	Second Digit	Moisture Protection
0	No specific protection	0	No specific protection
1	Protected against solid objects over 50mm, e.g. accidental contact of hands	1	Protected against vertically falling drops of water
2	Protected against solid objects over 12mm, e.g. contact with finger	2	Protected against direct sprays of water up to 15 degrees from the vertical
3	Protected against solid objects over 2.5mm, e.g. tools & wires	3	Protected against direct sprays of water up to 60 degrees from the vertical
4	Protected against solid objects over 1mm, e.g. wires & nails	4	Protected against water splashed from all directions, limited ingress permitted
5	Protected against dust limited ingress, no harmful deposits	5	Protected against low pressure jets of water from all directions
6	Totally protected against dust	6	Protected against strong jets of water
		7	Protection from temporary immersion
		8	(water tight), protection from continuous submersion
		9K	Protection against close range, high pressure and high temperature spray





TC SELECTABLE COLOUR

COOPER II SE7181TC/BK - 12W

Decorative 12 watt round profile IP65 architectural LED , ceiling or wall mount luminaire, with selectable CCT

Application

A decorative architectural solution for residential & commercial interior or exterior spaces

Design Specifications


- Selectable CCT 3000K / 4000K / 5700K
- Robust die-cast aluminium body profile, durable black powder coated finish
- Integral non-dimmable control gear, 12 watt
- High efficiency LED optics
- IK10, IP65 performance

Performance

- Non-dimmable




Dimensions

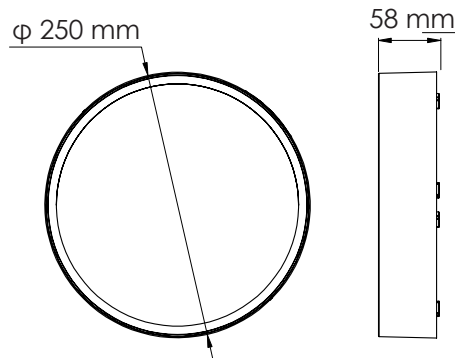

Photometric Data

SE7181TC/BK at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SE7181TC/BK	240/50	12	1000/1200/1100	3000/4000/5700	> 80	Black	Ø 250 x 58



TC SELECTABLE COLOUR

COOPER II SE7182TC/BK - 12W

Decorative 12 watt round profile IP65 architectural LED eyelid wall mount luminaire, with selectable CCT

Application

A decorative architectural solution for residential & commercial interior or exterior spaces

Design Specifications


- Stylish eyelid design
- Selectable CCT 3000K / 4000K / 5700K
- Robust die-cast aluminium body profile, durable black powder coated finish
- Integral non-dimmable control gear, 12 watt
- High efficiency LED optics
- IK10, IP65 performance

Performance

- Non-dimmable




Dimensions

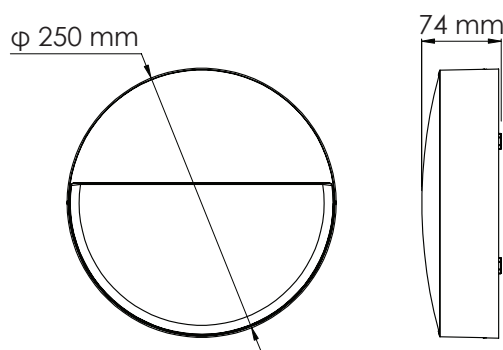

Photometric Data

SE7182TC/BK at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SE7182TC/BK	240/50	12	900/1100/1000	3000/4000/5700	> 80	Black	Ø 250 x 74

For terms of catalogue data use, refer to INDEX



CUBE II
S9320 – 10W

10 watt LED surface mount CUBE
profile wall luminaire, IP65

Application

Ideal for any residential or
commercial interior or exterior space

Design Specifications


- Durable aluminium body profile
- Powder coat finish, colour black or white
- High efficiency LED optics
- CCT choice of 3000K / 5000K
- Independent up & down beam,
adjustable from 10° to 60°
- Integral non-dimmable LED driver

Performance

- Non-dimmable




Dimensions

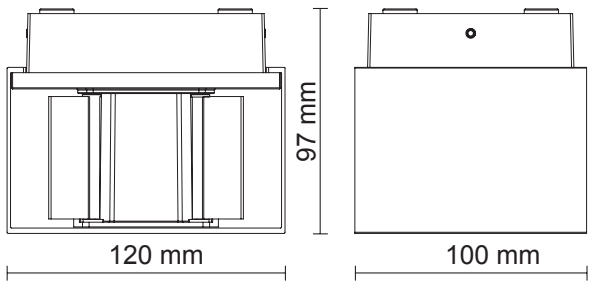

Photometric Data

S9320WW at 4000K

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
S9320WW/WH	240/50	10	750	3000	> 80	No	White
S9320WW/BK	240/50	10	750	3000	> 80	No	Black
S9320NDL/WH	240/50	10	900	5000	> 80	No	White
S9320NDL/BK	240/50	10	900	5000	> 80	No	Black

Adjustable 10 - 60°

Adjustable 10° - 60°



TC SELECTABLE COLOUR

ETON
SE7133TC - 4W
SE7134TC - 2 X 4W

IP54, GU10 lamp base architectural wall luminaire, with selectable CCT lamps included

Application

A decorative residential exterior or interior solution

Design Specifications

- Die-cast aluminium body and powder coat black or silver body profile
- Clear tempered glass cover
- Selectable CCT GU10 4 watt lamp included
- Up/down light distribution
- Beam distribution 50°

Performance

- Dimmable - Refer lamp selection



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SE7133TC/BK	240/50	4	360/400/380	3000/4000/6000	> 80	50°	Black
SE7133TC/SL	240/50	4	360/400/380	3000/4000/6000	> 80	50°	Silver
SE7134TC/BK	240/50	2 x 4	2 x 360/400/380	3000/4000/6000	> 80	50°	Black
SE7134TC/SL	240/50	2 x 4	2 x 360/400/380	3000/4000/6000	> 80	50°	Silver

Dimensions



HAMPTONS
SE8002 - 6 X 0.6W

IP65 LED residential deck light kits

Application

Decorative exterior feature lighting

Design Specifications

- Durable 316 stainless steel face and aluminium body
- Frosted polycarbonate diffuser
- Ø35 x H26 mm round deck lights
- 6 x 0.6W deck light head with 3.5 m PVC flex & 2 pin quick connect plug
- Pre-wired 6m of rubber flex with 6 x 2 pin quick connect sockets
- 1 x IP65 10VA driver, non-dimmable
- SE8002P extension kit contents include: 1 x Ø35 x H26 mm, 316 stainless steel face round deck light, 1 x 3.5 m PVC flex with 2 pin quick connect plug, 1 x 1.1 m extension cable, maximum of 10 connected heads per (kit) driver, IP65, IK08 performance

Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V)/(Hz)	Output (V/DC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SE8002WW	240/50	12	3.6	360	3000	> 80	Stainless Steel
SE8002P/WW	240/50	12	0.6	360	3000	> 80	Stainless Steel
SE8002NDL	240/50	12	3.6	380	5000	> 80	Stainless Steel
SE8002P/NDL	240/50	12	0.6	380	5000	> 80	Stainless Steel



SE8002P LED deck light extension kit

For terms of catalogue data use, refer to INDEX



GEO
S9342 - 8W
S9343 - 13W

LED inground IP67, luminaire, IK09 rated

Application

Decorative LED solution, ideal for gardens and decorative pathways

Design Specifications


- 316L stainless steel face cover and allen screws, die-cast aluminium body
- Clear tempered glass diffuser
- High output LED optics
- High performance multifaceted reflector
- Integral non-dimmable LED driver
- IP68 PG11 PVC cable gland, silicon gasket
- PVC installation canister included
- Pre-wired 3 core rubber flex, 450mm
- IP67 , IK09 performance

Performance

- Non-dimmable



Dimensions

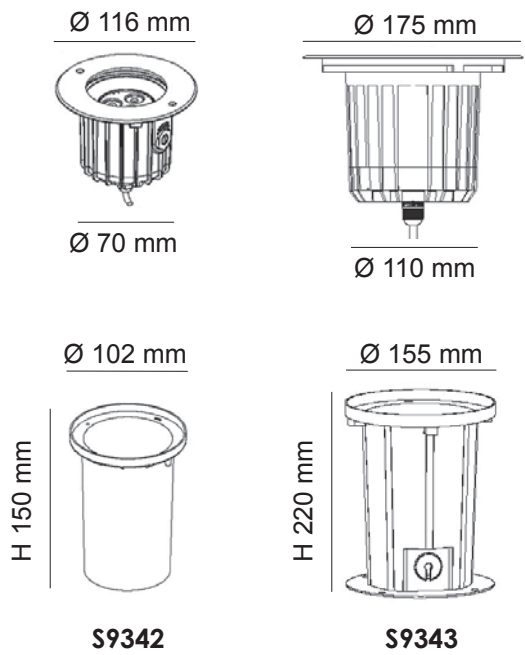

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Load Pressure Capacity (Kg)
S9342WW	240/50	8	400	3000	> 80	24°	Stainless Steel	3000
S9342CW	240/50	8	450	4000	> 80	24°	Stainless Steel	3000
S9343WW	240/50	13	600	3000	> 80	24°	Stainless Steel	3000
S9343CW	240/50	13	700	4000	> 80	24°	Stainless Steel	3000



GEO
S9344 - 20W
S9345 - 32W

LED inground IP67, luminaire, IK09 rated

Application

Decorative LED solution, ideal for gardens and decorative pathways

Design Specifications


- 316L stainless steel face cover and allen screws, die-cast aluminium body
- Clear tempered glass diffuser
- High output LED optics
- High performance multifaceted reflector
- Integral non-dimmable LED driver
- IP68 PG11 PVC cable gland, silicon gasket
- PVC installation canister included
- Pre-wired 3 core rubber flex, 450mm
- IP67, IK09 performance

Performance

- Non-dimmable



Dimensions

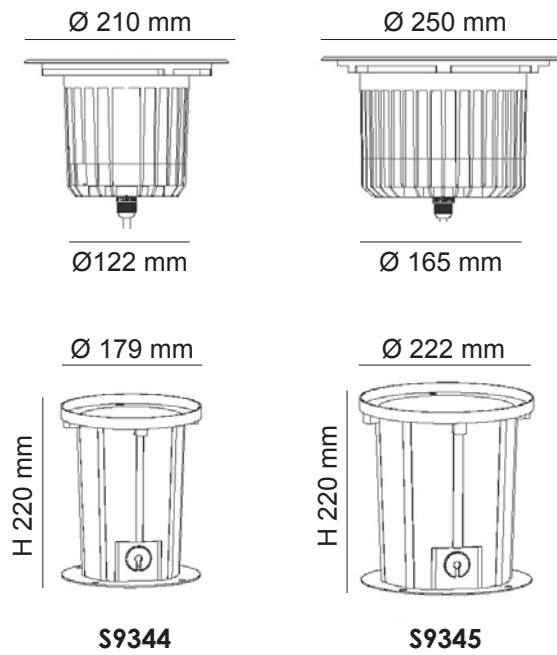

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Load Pressure Capacity (Kg)
S9344WW	240/50	20	1200	3000	> 80	24°	Stainless Steel	3000
S9344CW	240/50	20	1400	4000	> 80	24°	Stainless Steel	3000
S9345WW	240/50	32	2000	3000	> 80	24°	Stainless Steel	3000
S9345CW	240/50	32	2200	4000	> 80	24°	Stainless Steel	3000

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

GEO ELITE

SL7363TC/SLS - 3W
SL7364TC/SLS - 4W
SL7365TC/SLS - 8W

IP67 LED inground luminaire,
IK08 rated

Application

Decorative residential exterior solution,
ideal for decks and pathways

Design Specifications

- Robust stainless steel body
- Clear tempered glass diffuser with honeycomb filter
- High output LED optics
- Adaptive 12/24V DC input, constant voltage SAL driver ordered separately
- Pre-wired 2 core rubber flex 350mm with an IP67 nickel plated copper cable gland
- PVC installation cannister included
- IK08, IP67 performance


Performance

- Non-dimmable



Installation can

Dimensions

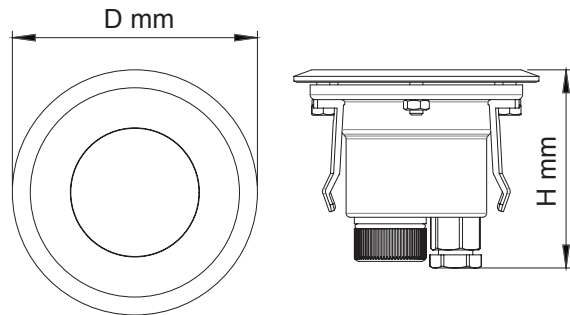

Technical Specifications

Model No.	Input (V DC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions (D x H mm)
SL7363TC/SLS	12/24	3	240/280/260	3000/4000/5700	> 80	24°	Ø 75 x 61
SL7364TC/SLS	12/24	4	320/380/360	3000/4000/5700	> 80	24°	Ø 103 x 64
SL7365TC/SLS	12/24	8	640/750/730	3000/4000/5700	> 80	24°	Ø 150 x 68



TC SELECTABLE COLOUR

GEO MAXI

SL7363TC/SLP - 3W
SL7364TC/SLP - 4W
SL7365TC/SLP - 8W

IP67 LED inground luminaire,
IK08 rated

Application

Decorative residential exterior solution,
ideal for gardens and decorative pathways

Design Specifications

- Durable PC body form and stainless trim
- Clear tempered glass diffuser with honeycomb filter
- High output LED optics
- Adaptive 12/24V DC input, constant voltage SAL driver ordered separately
- Pre-wired 2 core rubber flex 300mm with an IP67 nickel plated copper cable gland
- PVC installation cannister included
- IK08, IP67 performance


Performance

- Non-dimmable



Installation can

Dimensions

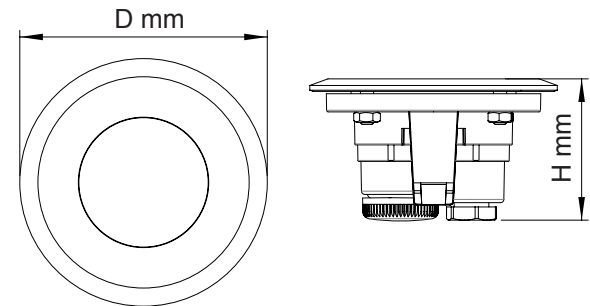

Technical Specifications

Model No.	Input (V DC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions (D x H mm)
SL7363TC/SLP	12/24	3	240/280/260	3000/4000/5700	> 80	24°	Ø 75 x 43
SL7364TC/SLP	12/24	4	320/380/360	3000/4000/5700	> 80	24°	Ø 103 x 49
SL7365TC/SLP	12/24	8	640/750/730	3000/4000/5700	> 80	24°	Ø 150 x 55

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

GEO PATHWAY
S9342/24V/TC - 10W
S9343/24V/TC - 14W
S9344/24V/TC - 20W

IP67 LED inground luminaire,
IK10 rated

Application

Decorative residential or commercial
exterior solution, ideal for gardens and
decorative pathways

Design Specifications

- Durable stainless steel trim, die-cast aluminium body form
- Clear tempered glass diffuser, 3000kg load capacity
- Faceted optical LED lens
- High output LED optics
- 24V DC constant voltage driver required
- Pre-wired 2 core rubber flex 500mm
- PVC installation cannister included
- IK10, IP67 performance

Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V DC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions (D x H mm)
S9342/24V/TC	24	10	925/1075/1050	3000/4000/5700	> 80	24°	Ø 135 x 155
S9343/24V/TC	24	14	1300/1475/1450	3000/4000/5700	> 80	24°	Ø 165 x 166
S9344/24V/TC	24	20	1850/2075/2025	3000/4000/5700	> 80	24°	Ø 215 x 180




S9342/24V/TC

S9343/24V/TC



S9344/24V/TC

Dimensions



GROUND
S9338/3W/30 - 3W

3 watt adjustable LED
inground luminaire, IP67 rated

Application

Decorative residential exterior solution,
ideal for gardens and decorative pathways

Design Specifications

- Die-cast aluminium body
- Stainless steel face panel & screws, clear tempered glass diffuser
- High output LED optics
- 24V DC driver required
- Beam angle 30°, optical adjustment between 50°~60°
- PC installation canister included, pre-wired 600 mm 2 core rubber flex
- Suitable LED drivers, PLUTO 15DV, PLUTO 40DV, PLUTO 60DV, PLUTO 100/24V
- IK08, IP67 performance

Performance

- Non-dimmable




Technical Specifications

Model No.	Input (V DC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
S9338/3W/30 WW	24	3	150	3000	> 70	30°	Stainless Steel
S9338/3W/30 DL	24	3	200	6000	> 70	30°	Stainless Steel


For terms of catalogue data use, refer to INDEX



Dimensions

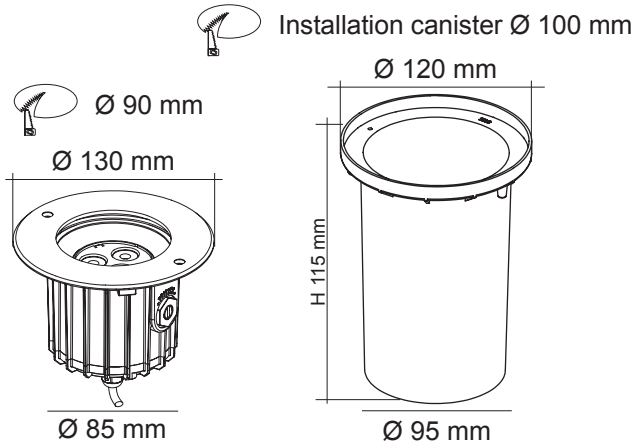

Optical adjustment

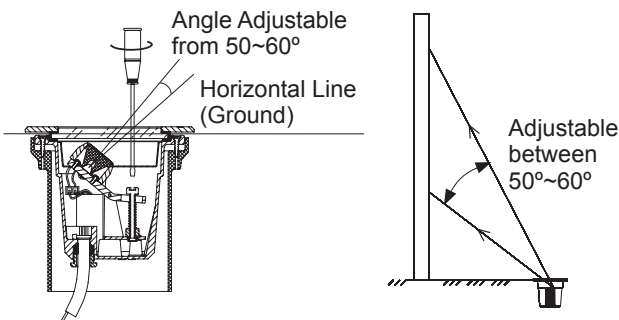



GLOW
SL7362/SLS - 4W

4 watt, IP67 LED inground luminaire,
IK08 rated

Application

Decorative residential exterior solution,
ideal for decks and pathways

Design Specifications


- Durable stainless steel body
- Clear tempered glass diffuser
- Frosted optical LED lens
- High output LED optics
- 12V DC constant voltage driver required
- Pre-wired 2 core rubber flex 1m with an IP67 nickel plated copper cable gland
- PVC installation cannister included
- Suitable LED drivers, PLUTO 15DV, PLUTO 40DV, PLUTO 60DV
- IK08, IP67 performance

Performance

- Non-dimmable



Dimensions

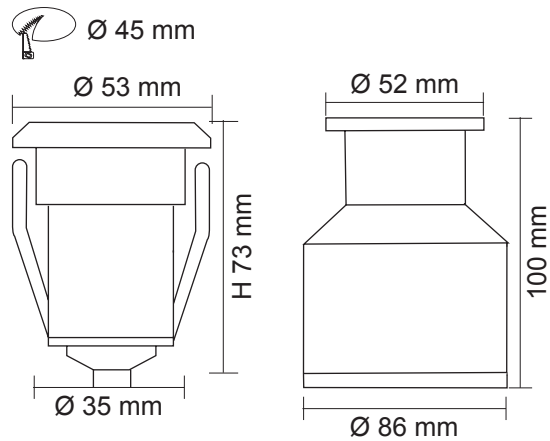

Technical Specifications

Model No.	Input (V DC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SL7362WW/SLS	12	4	300	3000	> 80	15°	Stainless Steel
SL7362DL/SLS	12	4	300	6000	> 80	15°	Stainless Steel





ASTER
SE7367G4/BK – 2.5W

IP65 LED residential landscape luminaire, 2.5W G4 lamp with multi-installation base accessories, colour black

ASTER DZINE
SE7367G4/AB – 2.5W

IP65 LED ANTIQUE BRASS residential landscape luminaire, 2.5W G4 lamp with multi-installation base accessories

Application

Decorative accent solution for residential garden spaces

Design Specifications

- G4 2.5 watt WW (3000K) or DL (6000K) lamp included
- 12V AC or DC driver required
- Multi-installation accessories included for in ground or base mounting installations, including a (220mm) luminaire extension column
- Supplied with pre-wired 1000mm rubber flex for faster installation, driver ordered separately
- IP65 protection



Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V AC/DC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SE7367G4WW/AB	12	2.5	90	3000	> 80	Antique brass	Ø 155 x 714
SE7367G4DL/AB	12	2.5	90	6000	> 80	Antique brass	Ø 155 x 714
SE7367G4WW/BK	12	2.5	90	3000	> 80	Black	Ø 155 x 714
SE7367G4DL/BK	12	2.5	90	6000	> 80	Black	Ø 155 x 714



LILY
SE7366G4/BK – 2.5W

IP65 LED residential landscape luminaire, 2.5W G4 lamp with multi-installation base accessories, colour black

LILY DZINE
SE7366G4/AB – 2.5W

IP65 LED ANTIQUE BRASS residential landscape luminaire, 2.5W G4 lamp with multi-installation base accessories

Application

Decorative accent solution for residential garden spaces

Design Specifications

- G4 2.5 watt WW (3000K) or DL (6000K) lamp included
- 12V AC or DC driver required
- Multi-installation accessories included for in ground or base mounting installations, including a (220mm) luminaire extension column
- Supplied with pre-wired 1000mm rubber flex for faster installation, driver ordered separately
- IP65 protection



Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V AC/DC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SE7366G4WW/AB	12	2.5	90	3000	> 80	Antique brass	Ø 155 x 719
SE7366G4DL/AB	12	2.5	90	6000	> 80	Antique brass	Ø 155 x 719
SE7366G4WW/BK	12	2.5	90	3000	> 80	Black	Ø 155 x 719
SE7366G4DL/BK	12	2.5	90	6000	> 80	Black	Ø 155 x 719

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

LOUNGE II

S9328/150TC – 9W

S9328/220TC – 15W

9/15 watt decorative IP54 architectural LED wall mount luminaire, with selectable CCT

Application

An architectural solution for residential & commercial interior or exterior spaces

Design Specifications

- Selectable CCT , 3000K / 4000K / 5000K
- Durable white or black powder coated finish
- Integral non-dimmable control gear
- Robust die-cast aluminium body profile
- High efficiency LED optics
- Up/down optical performance

Performance

- Non-dimmable




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (L x W x H mm)
S9328/150TC/WH	240/50	9	500/600/550	3000/4000/5000	> 80	White	150 x 90 x 55
S9328/150TC/BK	240/50	9	500/600/550	3000/4000/5000	> 80	Black	150 x 90 x 55
S9328/220TC/WH	240/50	15	800/1000/900	3000/4000/5000	> 80	White	220 x 90 x 55
S9328/220TC/BK	240/50	15	800/1000/900	3000/4000/5000	> 80	Black	220 x 90 x 55



Photometric Data (power on)

Unit: cd C0/C180 C90/C270

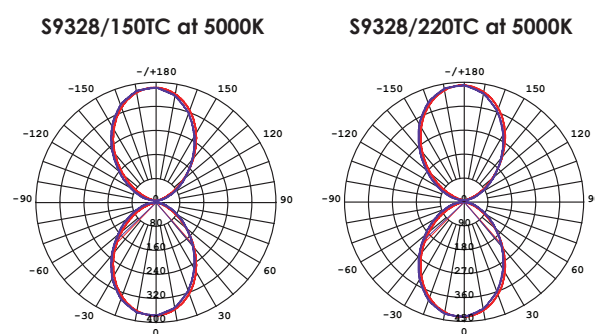

TC SELECTABLE COLOUR

LOUNGE IV

SE7066TC – 9W

9 watt decorative IP54 architectural LED wall mount luminaire

Application

A decorative architectural solution for residential & commercial interior or exterior spaces

Design Specifications

- Convenient TC selectable colour temperature, 3000K/4000K/5000K
- Quality white or black powder coat finish
- High efficiency LED optics
- Indirect illumination optical performance
- Integral constant current non-dimmable driver


Performance

- Non-dimmable




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (L x W x H mm)
SE7066TC/WH	240/50	9	500/600/550	3000/4000/5000	> 80	White	130 x 130 x 80
SE7066TC/BK	240/50	9	500/600/550	3000/4000/5000	> 80	Black	130 x 130 x 80

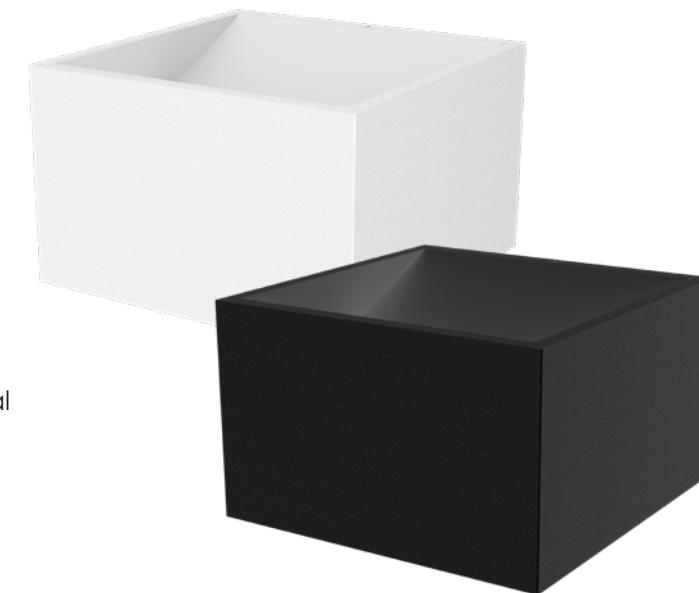


Dimensions

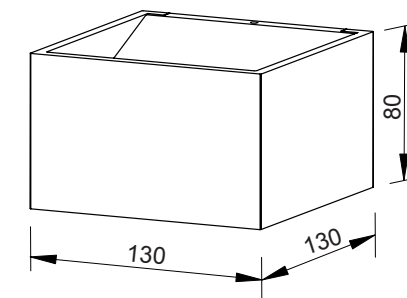

Photometric Data SE7066TC at 3000K

Unit: cd C0/C180 C90/C270





Maxi
Dzine

MAXI DZINE

SE7354LV114WW/AB - 3W

SE7354LV226WW/AB - 7W

Surface mount, IP65 LED wall luminaire
finished in ANTIQUE BRASS

Application

A decorative residential or commercial
exterior or interior solution

Design Specifications


- Stylish ANTIQUE BRASS design, louvred optics
- Opal polycarbonate diffuser
- Compact 3 watt design, electrical class III,
remote 12V DC driver ordered separately
- CCT 2700K, CRI>80
- Non-dimmable
- IP65 design, pre-wired with 250mm tails for
faster installation

Performance

- Non-dimmable



Dimensions

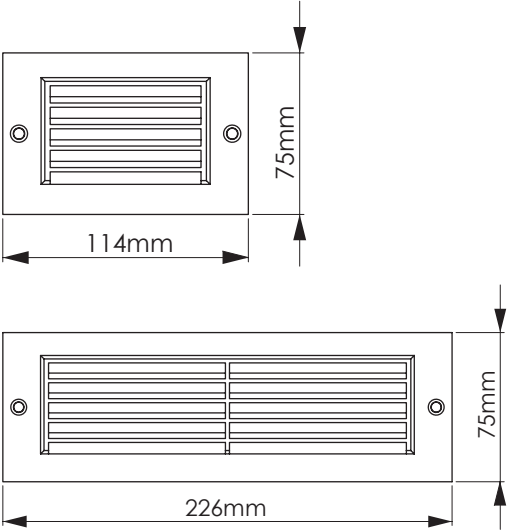

Technical Specifications

Model No.	Input (V DC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Mass (Kg)	Fitting Colour
SE7354LV114WW/AB	12	3	80	2700	> 80	0.39	Antique brass
SE7354LV226WW/AB	12	7	190	2700	> 80	0.65	Antique brass



MINI SPIKE

SL7266WW/BK - 6W

IP65 LED residential mini spike
landscape luminaire

Application

Decorative accent solution for
residential garden spaces

Design Specifications


- Die-cast powder coated black
aluminium body profile
- 12V AC or DC driver required
- High efficiency LED optics
- Pre-wired with 1.5 m 2 core rubber flex
- IP65 protection
- Adjustable trunnion optical system

Performance

- Non-dimmable



Dimensions

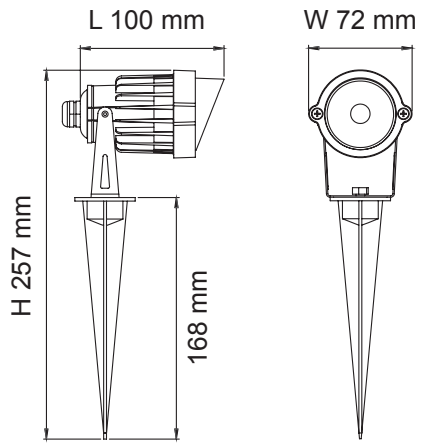

Technical Specifications

Model No.	Input (V AC/DC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SL7266WW/BK	12	6	400	3000	> 80	30°	Black

For terms of catalogue data use, refer to INDEX



MINI SPIKE DZINE (XT) SE7361L/TC/AB - 3W

IP54 LED residential mini spike landscape luminaire, in solid Antique Brass finish, with wired selectable CCT

MINI SPIKE DZINE (XU) SE7362TC/AB - 4W

IP54 LED residential mini spike landscape luminaire, in solid Antique Brass finish, with a selectable CCT lamp

Application

Decorative accent solution for residential garden spaces

Design Specifications

- Selectable CCT wiring configurations
- 12V AC or DC driver required, refer installation instructions for SAL driver model options
- High efficiency LED optics, tempered glass visor
- Supplied with pre-wired 1500mm rubber flex for faster installation, driver ordered separately
- Adjustable knuckle design, perfect for the garden space, ground spike robust black PC design
- IP54, IK06 protection.


Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V AC/DC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SE7361L/TC/AB	12	3	200/240/200	3000/4000/6000	> 80	38°	Antique brass
SE7362TC/AB	12	4	360/400/380	3000/4000/6000	> 80	38°	Antique brass

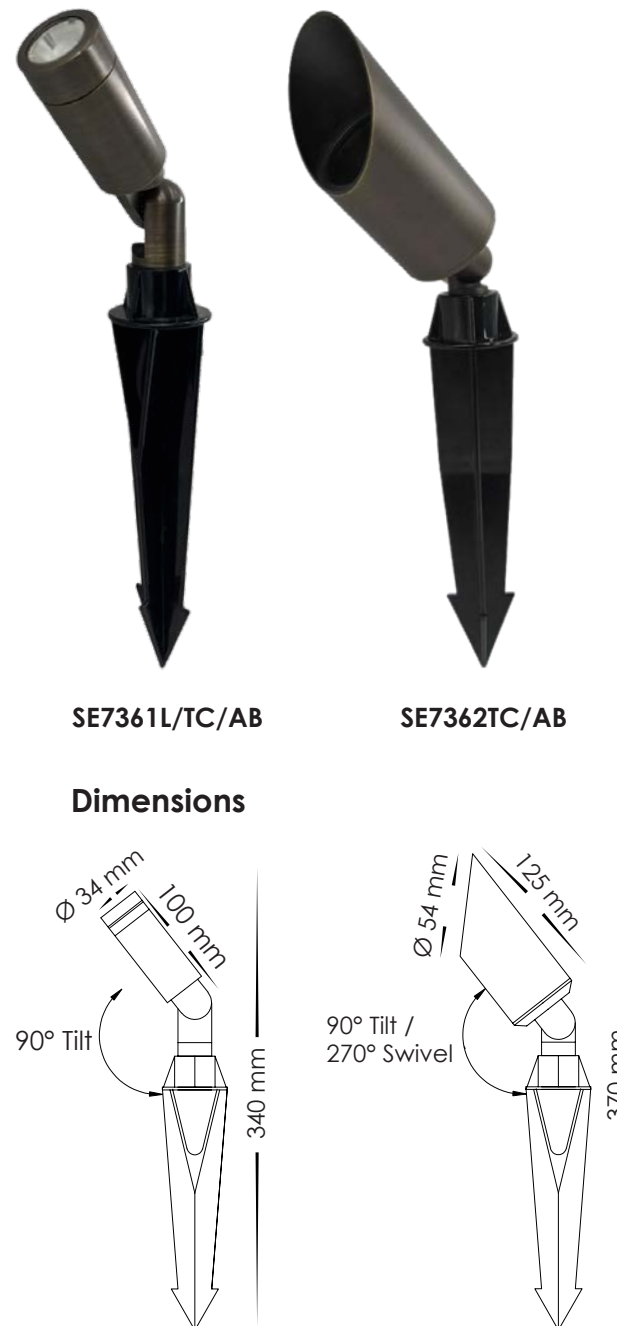

MINI SPIKE DZINE (XV) SE7363TC/AB - 4W

IP54 LED residential mini spike landscape luminaire, in solid Antique Brass finish, with a selectable CCT lamp

INI SPIKE DZINE (XW) SE7364TC/AB - 4W

IP54 LED residential mini spike landscape luminaire, in solid Antique Brass finish, with a selectable CCT lamp

Application

Decorative accent solution for residential garden spaces

Design Specifications

- Selectable CCT MR16 lamp included, GU5.3 base
- 12V AC or DC driver required, refer installation instructions for SAL driver model options
- High efficiency LED optics, tempered glass visor
- Supplied with pre-wired 1500mm rubber flex for faster installation, driver ordered separately
- Adjustable knuckle design, perfect for the garden space, ground spike robust black PC design
- IP54, IK06 protection.


Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V AC/DC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SE7363TC/AB	12	4	360/400/380	3000/4000/6000	> 80	38°	Antique brass
SE7364TC/AB	12	4	360/400/380	3000/4000/6000	> 80	38°	Antique brass

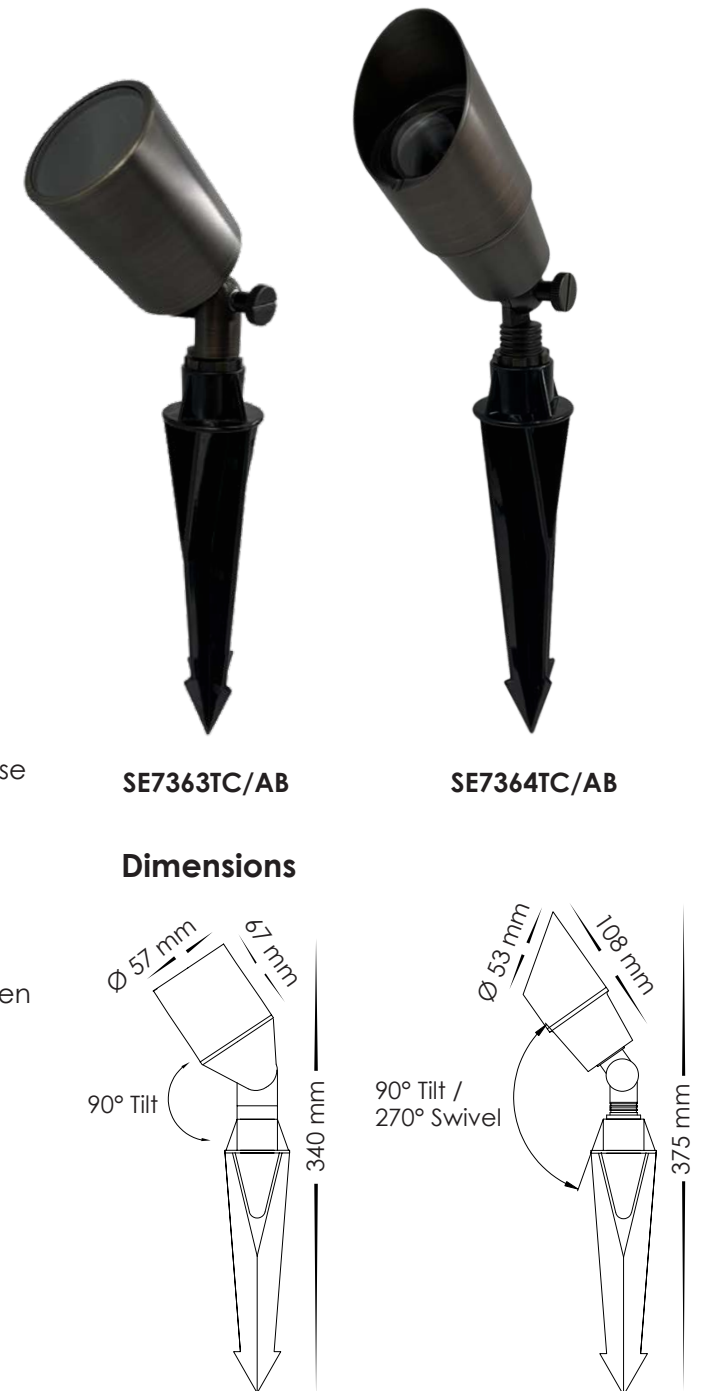

For terms of catalogue data use, refer to INDEX



**MOD
SE7013**

Decorative IP44 architectural LED wall mount luminaire - E27 lamp base

Application


A decorative architectural solution for residential exteriors

Design Specifications

- Stainless steel face panel
- Powder coated finish (SE7013 BK)
- Opal acrylic diffuser
- E27 lamp base
- Lamp NOT included
- Lamp options - LG5, LG9, LGS4, LGS8, LGS10, LGS14D, LT407, LT409

Performance


- Dimmable - Refer lamp selection

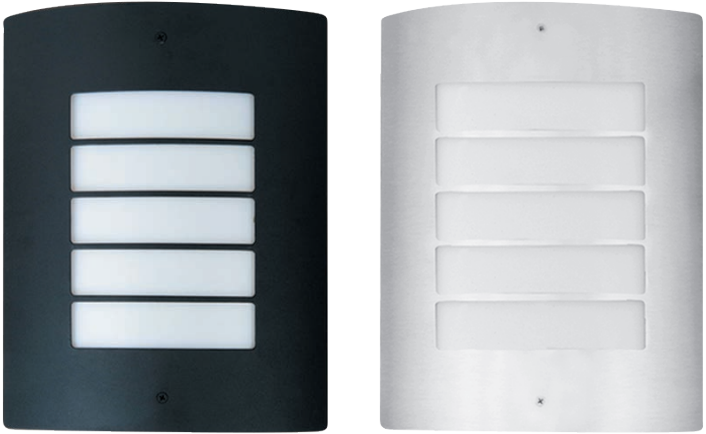

SE7013 BK

SE7013 SLS

Dimensions

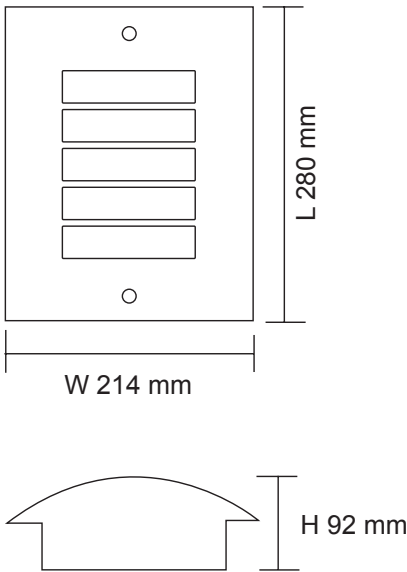

Technical Specifications

Model No.	Input (V)/(Hz)	Fitting Colour	Lamp Base	Dimension (D x H mm)
SE7013 BK	240/50	Black	E27	Ø 270 x 73
SE7013 SLS	240/50	Stainless Steel	E27	Ø 270 x 73



**MURRAY I
SE7017 / SE7018**

LED wall and post mount luminaires

Application

Decorative exterior pathway bollards

Design Specifications

- 304 stainless steel body
- Powder coated finish (SE7017BK, SE7018BK)
- Opal acrylic diffuser
- E27 lamp base, lamp not included
- Lamp options - LG5, LG9, LGS4, LGS8, LGS10, LT407, LT409
- IK08, IP44 performance


Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V)/(Hz)	Fitting Colour
SE7017 BK	240/50	Black
SE7017 SLS	240/50	Stainless Steel
SE7018 BK	240/50	Black
SE7018 SLS	240/50	Stainless Steel

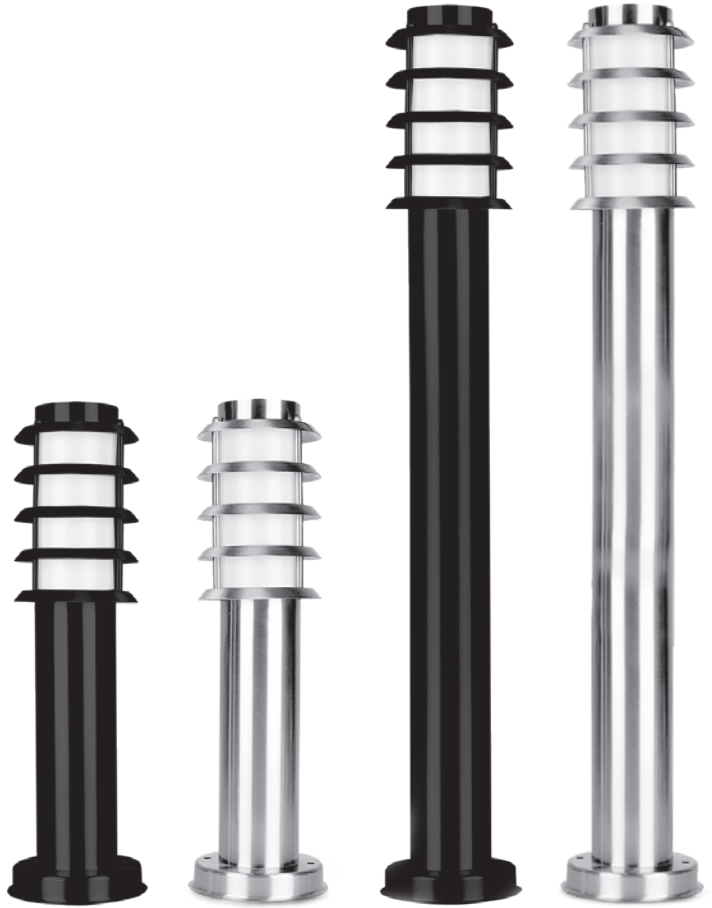


SE7017 BK

SE7017 SLS

SE7018 BK

SE7018 SLS

Dimensions

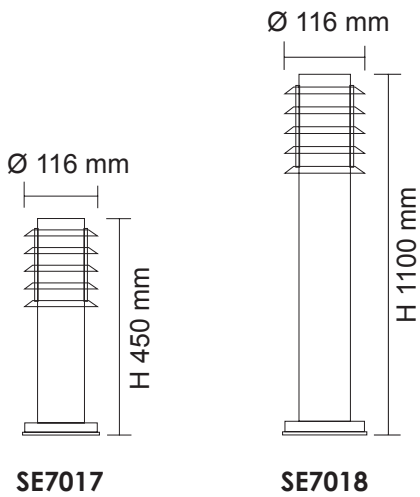

SE7017

SE7018

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

NEW BONDI

SE7121RE/TC - 4W

SE7122RE/TC - 2 X 4W

IP65 GU10 architectural wall luminaires, with GU10 selectable CCT lamp included

Application

A decorative residential exterior or interior solution

Design Specifications

- Aluminium body profile, powder coat black or stainless (AST) finish
- Clear tempered glass cover
- GU10 lamp base, selectable TC lamp included
- Lamp options GU10L550TC, GU10LR750, GU10LA750
- SE7121RE/TC - down light distribution
- SE7122RE/TC - up/down distribution
- Beam distribution 50°

Performance


- Dimmable - Refer lamp selection




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SE7121RE/TC/BK	240/50	4	360/400/380	3000/4000/6000K	> 80	Black
SE7121RE/TC/AST	240/50	4	360/400/380	3000/4000/6000K	> 80	Aluminium - Stainless
SE7122RE/TC/BK	240/50	2 x 4	2 x 360/400/380	3000/4000/6000K	> 80	Black
SE7122RE/TC/AST	240/50	2 x 4	2 x 360/400/380	3000/4000/6000K	> 80	Aluminium - Stainless

Dimensions

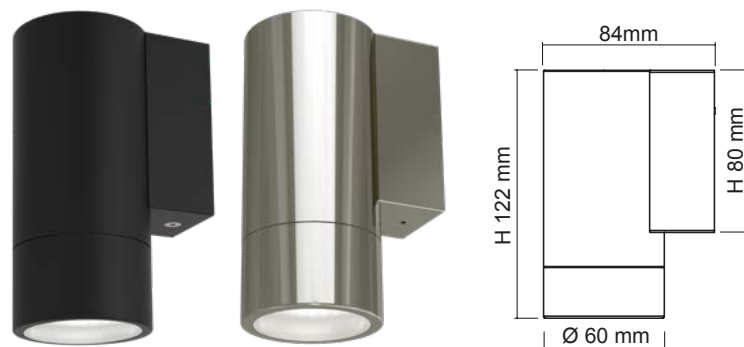

SE7121RE/TC/BK SE7121RE/TC/AST

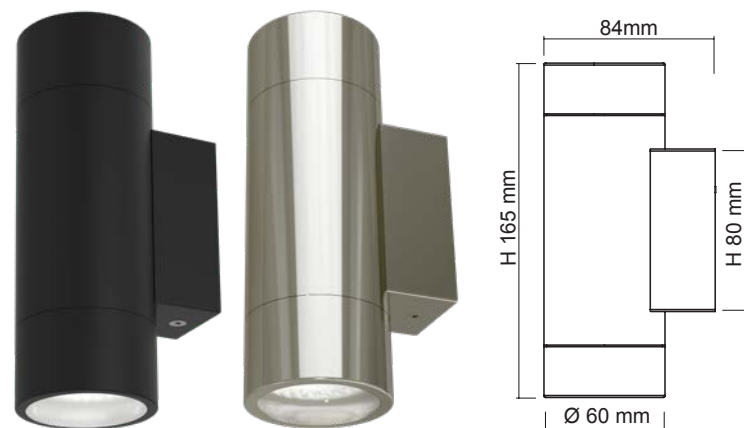

SE7122RE/TC/BK SE7122RE/TC/AST



TC SELECTABLE COLOUR

NEW BONDI II

SL7121RE/TC - 5W

SL7122RE/TC - 2 X 5W

IP65 LED architectural wall luminaires

Application

A decorative residential / commercial exterior or interior solution

Design Specifications

- Aluminium body profile, powder coat black or (AST) stainless finish
- Clear tempered glass cover
- Polycarbonate optical lens
- High efficiency LED optics
- Integral non-dimmable LED driver
- SL7121RE/TC - down light distribution
- SL7122RE/TC - up/down distribution
- Beam distribution 36°

Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SL7121RE/TC/BK	240/50	5	370/410/390	3000/4000/6000K	> 80	Black
SL7121RE/TC/AST	240/50	5	370/410/390	3000/4000/6000K	> 80	Aluminium - Stainless
SL7121RE/TC/WH	240/50	5	370/410/390	3000/4000/6000K	> 80	White
SL7122RE/TC/BK	240/50	2 x 5	2 x 370/410/390	3000/4000/6000K	> 80	Black
SL7122RE/TC/AST	240/50	2 x 5	2 x 370/410/390	3000/4000/6000K	> 80	Aluminium - Stainless
SL7122RE/TC/WH	240/50	2 x 5	2 x 370/410/390	3000/4000/6000K	> 80	White

For terms of catalogue data use, refer to INDEX

Dimensions



SL7121RE/TC/BK SL7121RE/TC/AST SL7121RE/TC/WH



SL7122RE/TC/BK SL7122RE/TC/AST SL7122RE/TC/WH



TC SELECTABLE COLOUR

NEW BRONTE
SL7021TC - 3W
SL7022TC - 2 X 3W

IP65 LED architectural wall
luminaire with selectable CCT

Application

A decorative residential / commercial
exterior or interior solution

Design Specifications

- Aluminium body profile, powder coat black or stainless (AST) finish or 316 Stainless Steel
- Clear tempered glass cover
- Polycarbonate optical lens
- High efficiency LED optics, beam distribution 36°
- Integral non-dimmable LED driver
- SL7021 downward light distribution
- SL7022 up and down light distribution
- IP65, IK08 performance

Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Fitting Colour	Dimension (L x W x H mm)
SL7021TC/SLS	240/50	3	210/230/220	3000/4000/6000	Stainless Steel	64 x 40 x 120
SL7021TC/BK	240/50	3	210/230/220	3000/4000/6000	Black	64 x 40 x 120
SL7021TC/AST	240/50	3	210/230/220	3000/4000/6000	AL-Stainless	64 x 40 x 120
SL7022TC/SLS	240/50	2 x 3	2 x 210/230/220	3000/4000/6000	Stainless Steel	64 x 40 x 160
SL7022TC/BK	240/50	2 x 3	2 x 210/230/220	3000/4000/6000	Black	64 x 40 x 160
SL7022TC/AST	240/50	2 x 3	2 x 210/230/220	3000/4000/6000	AL-Stainless	64 x 40 x 160



Image courtesy of





TC SELECTABLE COLOUR

NEWLAND SL7015L TC/BK - 10W

LED architectural post luminaire,
with selectable CCT

Application


Ideal for residential or apartment
exterior pathways

Design Specifications

- Die-cast aluminium body, flat profile design
- Durable black powder coated finish
- Clear polycarbonate lens, pathway optical distribution 70°
- Integral LED control gear 10 watt
- Base plate mounting design, rag bolts excluded
- IP65, IK08 performance
- SL7015L65TC/BK - 120mm Ø, 650mm height
- SL7015L100TC/BK - 120mm Ø, 1000mm height

Performance

- Non-dimmable

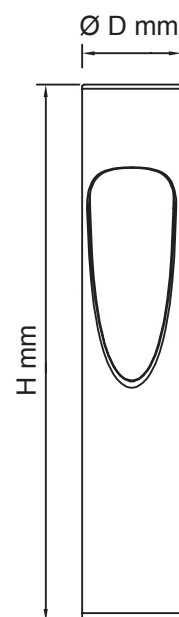

SL7015L65TC/BK SL7015L100TC/BK

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimension (D x H mm)
SL7015L65TC/BK	240/50	10	300/340/375	2800/4000/5000	> 80	Black	Ø 120 x 650
SL7015L100TC/BK	240/50	10	300/340/375	2800/4000/5000	> 80	Black	Ø 120 x 1000



TC SELECTABLE COLOUR

NEWPORT SPIKE SL7261TC - 5W

IP54 MR16 LED residential spike
luminaire, with selectable CCT lamp

Application

Decorative accent solution

Design Specifications

- Machined 316L stainless steel or extruded aluminium body profile, black or silver or anodized silver finish
- Clear tempered glass cover
- GU5.3 lamp base, MR16 5W selectable CCT lamp included
- 600 mm 2 core rubber flex
- 12V AC or DC driver required
- Lamp options - MR16/7W, MR16DIM9 (excluding Stainless Steel fittings)


Performance

- Dimmable - Refer lamp selection



SL7261TC/SL SL7261TC/BK SL7261TC/AS SL7261TC/SLS

Dimensions

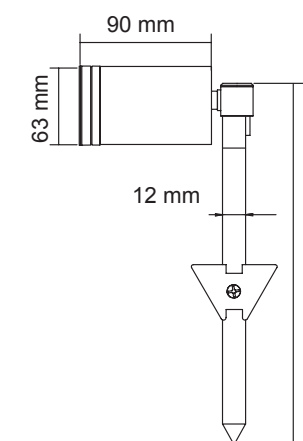

Technical Specifications

Model No.	Input (V AC/DC)	Lamp Base	Material	Fitting Colour	Type
SL7261TC/SLS	12	GU5.3	Machined 316L Stainless Steel	Stainless Steel	Single Head
SL7261TC/SL	12	GU5.3	Extruded Aluminium	Silver	Single Head
SL7261TC/BK	12	GU5.3	Extruded Aluminium	Black	Single Head
SL7261TC/AS	12	GU5.3	Extruded Aluminium	Anodized Silver	Single Head

For terms of catalogue data use, refer to INDEX



QUARTER
SE7146 - 16W

IP65 LED architectural wall luminaire IK07

Application

A decorative residential / commercial exterior or interior solution

Design Specifications


- Die-cast aluminium body and powder coated body profile
- Clear tempered glass cover
- High efficiency LED optics
- High performance multifaceted reflector system
- Integral non-dimmable LED driver
- Installation orientation, face down only

Performance


- Non-dimmable



Dimensions

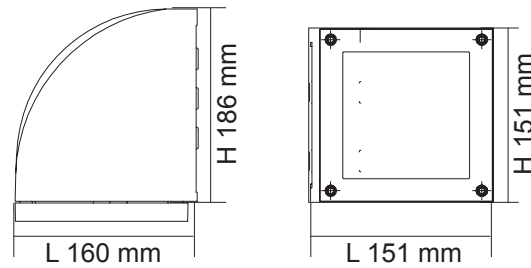

Photometric Data SE7146WW at 3000K

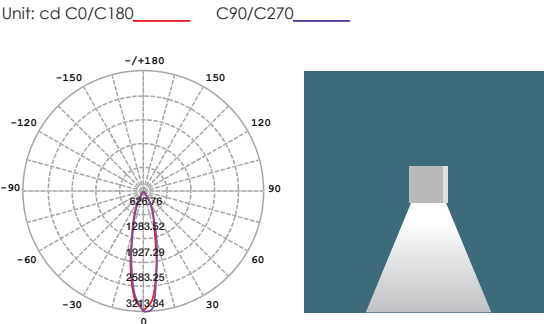

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SE7146WW/BK	240/50	16	1150	3000	> 80	25°	Black
SE7146WW/CB	240/50	16	1150	3000	> 80	25°	Charcoal Black
SE7146CW/BK	240/50	16	1200	4000	> 80	25°	Black
SE7146CW/CB	240/50	16	1200	4000	> 80	25°	Charcoal Black



TC SELECTABLE COLOUR

SWAN
SE7085 / SE7086

LED stainless steel wall or ground mount luminaire

Application

Decorative exterior stainless steel, ideal for foyers and residential perimeters

Design Specifications

- Stainless steel body
- Clear acrylic diffuser
- 240V, E27 lamp base, lamp not included
- Lamp options LG5, LG9, LGS4, LGS8, LGS10, LT407, LT409

Performance

- Non-dimmable



Technical Specifications


Model No.	Input (V)/(Hz)	Fitting Colour
SE7085	240/50	Stainless Steel
SE7086/55	240/50	Stainless Steel
SE7086/100	240/50	Stainless Steel

For terms of catalogue data use, refer to INDEX


SE7085




Dimensions



SE7086/55

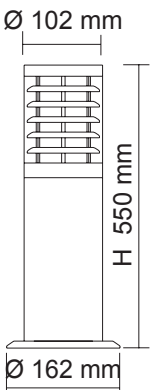

SE7086/100

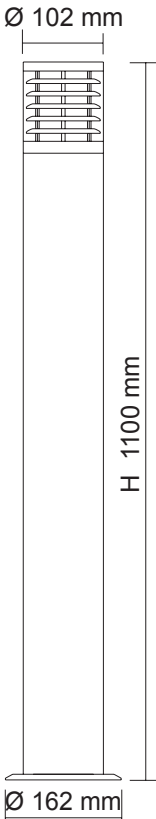



STEIN SE7148 - 32W

IP65 LED architectural wall luminaire,
up and down

Application

A decorative residential / commercial
exterior or interior solution

Design Specifications

- Die-cast aluminium body and powder coated body profile
- Clear tempered glass cover
- High efficiency LED optics
- High performance multifaceted reflector system, standard beam distribution 25°, narrow beam distribution < 25° available
- Integral non-dimmable LED driver

Performance

- Non-dimmable




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SE7148WW/BK	240/50	32	2 x 800	3000	> 80	25°	Black
SE7148WW/CB	240/50	32	2 x 800	3000	> 80	25°	Charcoal Black
SE7148CW/BK	240/50	32	2 x 800	4000	> 80	25°	Black
SE7148CW/CB	240/50	32	2 x 800	4000	> 80	25°	Charcoal Black
SE7148NB/WW/BK	240/50	32	800/500	3000	> 80	25°	Black
SE7148NB/WW/CB	240/50	32	800/500	3000	> 80	25°	Charcoal Black
SE7148NB/CW/BK	240/50	32	800/500	4000	> 80	25°	Black
SE7148NB/CW/CB	240/50	32	800/500	4000	> 80	25°	Charcoal Black




Dimensions

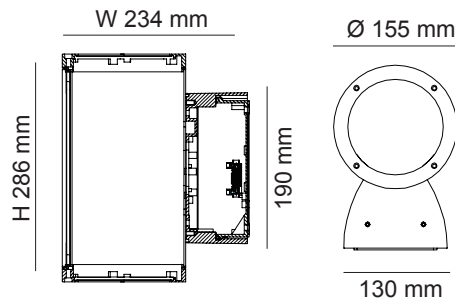

Photometric Data

SE7148WW at 3000K

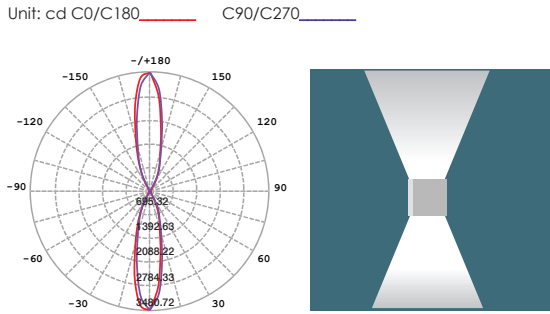

STEIN MINI SE7147 - 16W

IP65 LED architectural wall luminaire,
up and down

Application

A decorative residential / commercial
exterior or interior solution

Design Specifications

- Die-cast aluminium body and powder coated body profile
- Clear tempered glass cover
- High efficiency LED optics
- High performance multifaceted reflector system, beam distribution 25°
- Integral constant current non-dimmable LED driver
- IK08, IP65 performance

Performance

- Non-dimmable




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SE7147WW/BK	240/50	16	2 x 400	3000	> 80	25°	Black
SE7147WW/CB	240/50	16	2 x 400	3000	> 80	25°	Charcoal Black
SE7147CW/BK	240/50	16	2 x 400	4000	> 80	25°	Black
SE7147CW/CB	240/50	16	2 x 400	4000	> 80	25°	Charcoal Black
SE7147NDL/BK	240/50	16	2 x 400	4000	> 80	25°	Black
SE7147NDL/CB	240/50	16	2 x 400	4000	> 80	25°	Charcoal Black




Dimensions

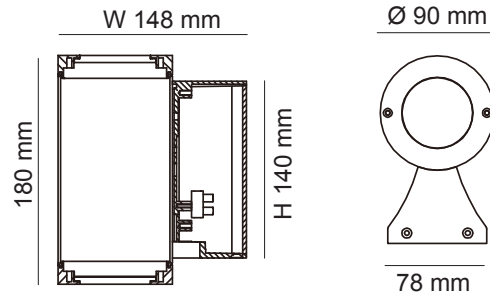

Photometric Data

SE7147WW at 3000K

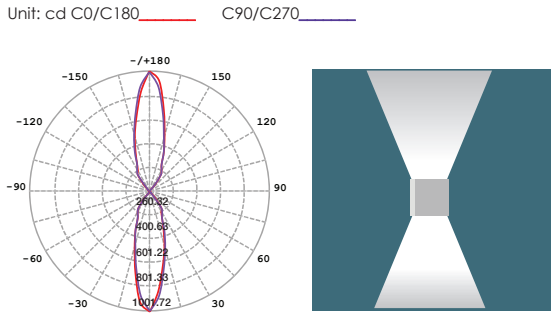

SMARTER LIGHTING CHOICES



 SAL National Pty Ltd - 40 Biloela St, Villawood NSW 2163

 + 61 2 9723 3099

 www.sal.net.au

 info@sal.net.au

 VICT/TAS - 46/48 Keys Road Moorabbin VIC 3189

 + 61 3 9532 3168

 info@sal.net.au

 QLD - 36 Whitelaw Place Richlands QLD 4077

 + 61 7 3879 5999

 info@sal.net.au

 SA/NT - 79 Frederick St, Welland SA 5009

 +61 8 7084 1958

 info@sal.net.au

 WA - 29 Beringarra Avenue Malaga WA 6090

 +61 8 9248 7458

 info@sal.net.au



2026/28