

SMARTER LIGHTING CHOICES



SAL Lighting a Smarter Future  




2026/28





An extensive selection of traditional lamp profiles, with a wide selection of colours and dimming choices.



AR111 750 AR111/750WW/R9 - 10W GEMS COMPLIANT

AR111 LED dimmable lamp module.

Application

Energy efficient LED lamp solutions

Design Specifications


- Aluminium body, G53 base
- High output LED optics, 3000K, CRI>90
- Specially designed optical lens
- 12V AC or DC driver required
- Beam distribution 24°
- Compatible with most electronic transformers, Suits most halogen AR111 lamp fittings

Performance

- Dimmable - Trailing edge with SAL MINI60




Dimensions

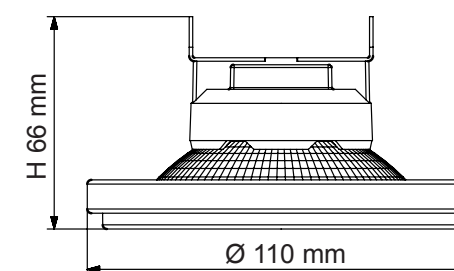

Photometric Data

AR111/750WW/R9 at 3000K

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270




Technical Specifications

Model No.	Input (V AC/DC)	Power (W)	Lumen (lm/W)	CCT (K)	CRI	Beam Angle	Dimmable
AR111/750WW/R9	12	10	750	3000	> 90	24°	Yes*

NOTE: * with SAL MINI60

For terms of catalogue data use, refer to INDEX



CANDLE CLEAR DIMMABLE
LCA D/C - 4W
GEMS COMPLIANT

4 watt dimmable LED filament
candle style clear lamps

Application

Energy efficient LED lamp solutions

Design Specifications

- Clear glass diffuser, SES, SBC, ES or BC base
- High efficiency LED filament, CRI >80
- Integral trailing edge dimmable LED driver
- 320° beam distribution
- CCT choice of 2700K/5000K
- 1:1 size to traditional candle lamp, dimmable, suits most candle lamp fittings


Performance

- Dimmable - Trailing edge*



LCA B15/C LCA B22/C LCA E14/C LCA E27/C

Dimensions

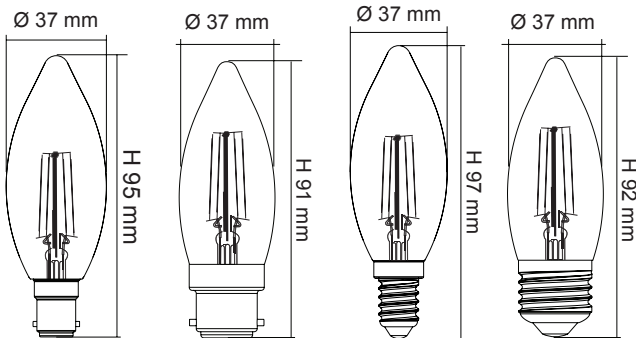


Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LCA27B15D/C	240/50	4	450	2700	> 80	320°	Yes	B15
LCA27B22D/C	240/50	4	450	2700	> 80	320°	Yes	B22
LCA27E14D/C	240/50	4	450	2700	> 80	320°	Yes	E14
LCA27E27D/C	240/50	4	450	2700	> 80	320°	Yes	E27
LCA50B15D/C	240/50	4	450	5000	> 80	320°	Yes	B15
LCA50B22D/C	240/50	4	450	5000	> 80	320°	Yes	B22
LCA50E14D/C	240/50	4	450	5000	> 80	320°	Yes	E14
LCA50E27D/C	240/50	4	450	5000	> 80	320°	Yes	E27

NOTE: * for compatible dimmers refer www.sal.net.au

For interior products, the IP rating stated is from below the ceiling



CANDLE OPAL DIMMABLE
LCA D - 4W
GEMS COMPLIANT

4 watt dimmable LED filament
candle style opal lamps

Application

Energy efficient LED lamp solutions

Design Specifications

- Opal glass diffuser, SES, SBC, ES or BC base
- High efficiency LED filament, CRI >80
- Integral trailing edge dimmable LED driver
- 320° beam distribution
- CCT choice of 2700K/5000K
- 1:1 size to traditional candle lamp, dimmable, suits most candle lamp fittings


Performance

- Dimmable - Trailing edge*



LCA B15 LCA B22 LCA E14 LCA E27

Dimensions

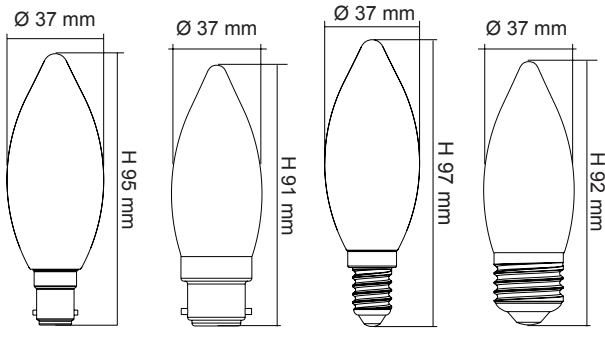


Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LCA27B15D	240/50	4	400	2700	> 80	320°	Yes	B15
LCA27B22D	240/50	4	400	2700	> 80	320°	Yes	B22
LCA27E14D	240/50	4	400	2700	> 80	320°	Yes	E14
LCA27E27D	240/50	4	400	2700	> 80	320°	Yes	E27
LCA50B15D	240/50	4	400	5000	> 80	320°	Yes	B15
LCA50B22D	240/50	4	400	5000	> 80	320°	Yes	B22
LCA50E14D	240/50	4	400	5000	> 80	320°	Yes	E14
LCA50E27D	240/50	4	400	5000	> 80	320°	Yes	E27

NOTE: * with SAL MINI60

For terms of catalogue data use, refer to INDEX



FANCY ROUND CLEAR DIMMABLE
LFR D/C - 4W
GEMS COMPLIANT

4 watt dimmable, LED filament,
clear fancy round lamps.

Application

Energy efficient LED lamp solutions

Design Specifications

- Clear glass diffuser, B15, B22, E14, E27 bases
- High efficiency LED filament, CRI >80
- Integral, trailing edge, dimmable LED driver
- 320° beam distribution
- CCT choice of 2700K/5000K
- 1:1 size to traditional fancy round lamp, dimmable, suits most fancy round lamp fittings

Performance

- Dimmable - Trailing edge*





Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LFR27B15D/C	240/50	4	450	2700	> 80	320°	Yes	B15
LFR27B22D/C	240/50	4	450	2700	> 80	320°	Yes	B22
LFR27E14D/C	240/50	4	450	2700	> 80	320°	Yes	E14
LFR27E27D/C	240/50	4	450	2700	> 80	320°	Yes	E27
LFR50B15D/C	240/50	4	450	5000	> 80	320°	Yes	B15
LFR50B22D/C	240/50	4	450	5000	> 80	320°	Yes	B22
LFR50E14D/C	240/50	4	450	5000	> 80	320°	Yes	E14
LFR50E27D/C	240/50	4	450	5000	> 80	320°	Yes	E27

NOTE: * for compatible dimmers refer www.sal.net.au



Dimensions

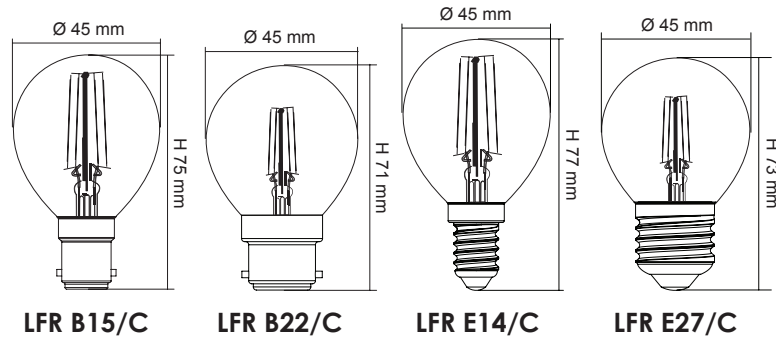

FANCY ROUND OPAL DIMMABLE
LFR D - 4W
GEMS COMPLIANT

4 watt dimmable, LED filament,
opal fancy round lamps.

Application

Energy efficient LED lamp solutions

Design Specifications

- Opal glass diffuser, B15, B22, E14, E27 bases
- High efficiency LED filament, CRI >80
- Integral, trailing edge, dimmable LED driver
- 320° beam distribution
- CCT choice of 2700K/5000K
- 1:1 size to traditional fancy round lamp, dimmable, suits most fancy round lamp fittings

Performance

- Dimmable - Trailing edge*




Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LFR27B15D	240/50	4	400	2700	> 80	320°	Yes	B15
LFR27B22D	240/50	4	400	2700	> 80	320°	Yes	B22
LFR27E14D	240/50	4	400	2700	> 80	320°	Yes	E14
LFR27E27D	240/50	4	400	2700	> 80	320°	Yes	E27
LFR50B15D	240/50	4	400	5000	> 80	320°	Yes	B15
LFR50B22D	240/50	4	400	5000	> 80	320°	Yes	B22
LFR50E14D	240/50	4	400	5000	> 80	320°	Yes	E14
LFR50E27D	240/50	4	400	5000	> 80	320°	Yes	E27

NOTE: * for compatible dimmers refer www.sal.net.au



Dimensions

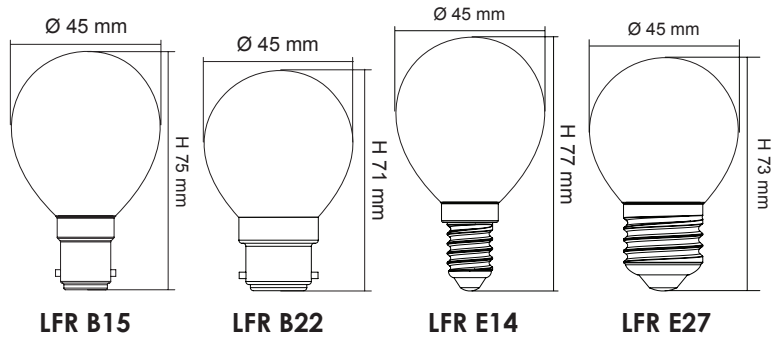



G4 SERIES G4L15 - 1.5W

1.5 watt LED G4 base lamp.

G4 SERIES G4L25 - 2.5W

2.5 watt LED G4 base lamp

Application

Energy efficient LED lamp solutions, designed for G4 base luminaires

Design Specifications

- Transparent silicone body
- 12V AC or DC driver required
- High efficiency LED optics
- CCT choice of 3000K/6000K, CRI>80
- Beam distribution 270°
- Compatible with most electronic transformers, suits most G4 lamp fittings

Performance


- Non-dimmable



Technical Specifications

Model No.	Input (V AC/DC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
G4L15WW	12	1.5	90	3000	> 80	270°	No	G4
G4L15DL	12	1.5	100	6000	> 80	270°	No	G4
G4L25WW	12	2.5	160	3000	> 80	270°	No	G4
G4L25DL	12	2.5	180	6000	> 80	270°	No	G4

For interior products, the IP rating stated is from below the ceiling



G9 SERIES G9L3D - 2.5W

G9 base designed to suit most non-dimmable G9 luminaires.

Application

G9L LED lamp, 3 watt ideal for feature lighting

Design Specifications

- Opal polycarbonate body profile
- High efficiency LED optics
- 300° optical distribution
- CCT choice of 3000K/6000K, CRI >80

Performance

- Non-dimmable




Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
G9L3D/WW	240/50	3	200	3000	> 80	300°	No	G9
G9L3D/DL	240/50	3	220	6000	> 80	300°	No	G9

For terms of catalogue data use, refer to INDEX



Dimensions

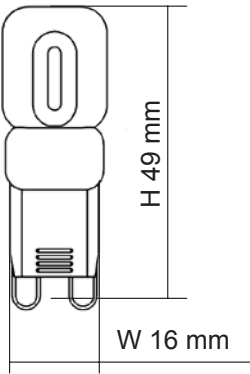



TC SELECTABLE COLOUR

GU10
GU10L TC - 4W/6W
GEMS COMPLIANT

High efficiency, GU10L LED lamps with selectable CCT.

Application

Energy efficient LED lamp solutions, designed for GU10 base luminaires

Design Specifications

- Selectable CCT 3000K/4000K/6000K
- Frosted polycarbonate lens
- Poly covered aluminium body
- High efficiency LED optics, CRI >80
- Integral non-dimmable driver, 240V
- Beam distribution 50°
- GU10 lamp base

Performance

- Non-dimmable



Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
GU10L350TC	240/50	4	340/380/360	3000/4000/6000	> 80	50°	No	GU10
GU10L550TC	240/50	6	470/530/500	3000/4000/6000	> 80	50°	No	GU10

NOTE: * for compatible dimmers refer www.sal.net.au

For interior products, the IP rating stated is from below the ceiling



Dimensions

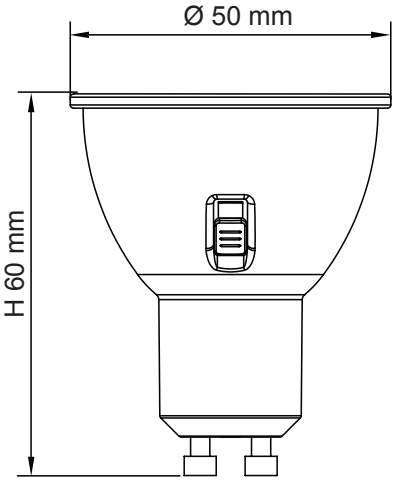

HIGH EFFICIENCY
GU10L TC
LED LAMP.

- Frosted polycarbonate lens
- Integral 240V LED driver
- Choice of 4 or 6 watts
- Beam distribution 50°



TC SELECTABLE COLOUR

WARM WHITE
3000K

COOL WHITE
4000K

DAYLIGHT
6000K





GU10 DIMMABLE GU10LA750MP/TC - 3W/5W/7W GEMS COMPLIANT

High efficiency dimmable GU10 LED lamp with selectable CCT and power

Application

Energy efficient LED lamp solutions, ideal for residential GU10 luminaires

Design Specifications


- Selectable power 3 / 5 or 7W
- Frosted polycarbonate lens
- Poly covered aluminium body
- High efficiency LED optics, CRI > 80
- Integral dimmable driver, 240V
- Selectable CCT 3000K / 4000K / 6000K
- Beam distribution 60°
- GU10 lamp base

Performance

- Dimmable - Trailing edge*



Dimensions

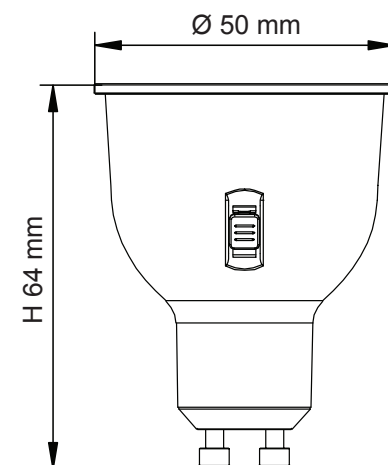


Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
GU10LA750MP/TC	240/50	3 5 7	350/400/380 550/600/580 650/750/700	3000/4000/6000	> 80	60°	Yes	GU10

NOTE: * for compatible dimmers refer www.sal.net.au

For interior products, the IP rating stated is from below the ceiling



GU10 GU10LR750 - 9W

High efficiency, 9 watt GU10 LED lamps

Application

Energy efficient LED lamp solutions, ideal for residential GU10 luminaires

Design Specifications


- Frosted polycarbonate lens
- Poly covered aluminium body
- High efficiency LED optics, CRI > 80
- Integral non-dimmable driver, 240V
- CCT choice of 3000K / 4000K / 6000K
- Beam distribution 60°
- GU10 lamp base

Performance

- Non-dimmable




Dimensions

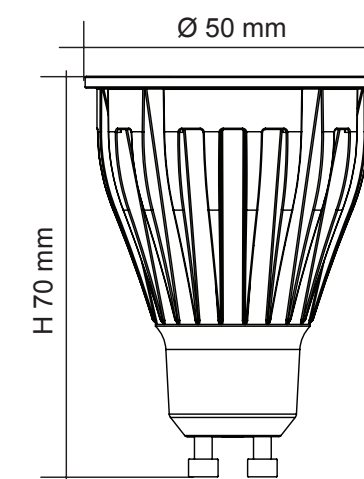

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
GU10LR750WW	240/50	9	700	3000	> 80	60°	No	GU10
GU10LR750CW	240/50	9	730	4000	> 80	60°	No	GU10
GU10LR750DL	240/50	9	750	6000	> 80	60°	No	GU10

For terms of catalogue data use, refer to INDEX



GX53 - 5W
GEMS COMPLIANT

GX53 base LED

Application

Perfect for under shelf
feature lighting

Design Specifications


- Frosted glass diffuser
- Poly covered aluminium body
- High efficiency LED optics
- CRI >80
- Integral non-dimmable driver
- CCT choice of 3000K / 4000K / 6000K

Performance

- Non-dimmable




Dimensions

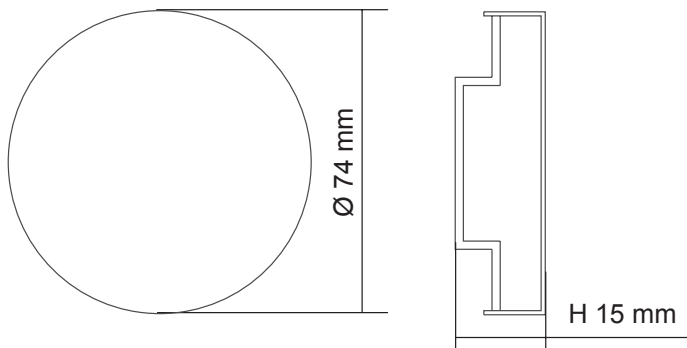

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
GX53/450WW	240/50	5	420	3000	> 80	120°	No	GX53
GX53/450CW	240/50	5	430	4000	> 80	120°	No	GX53
GX53/450DL	240/50	5	450	6000	> 80	120°	No	GX53

For interior products, the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR

LCT CONVERSION KIT DIMMABLE
LCT TC/D - 12W/20W

Dimmable, 12 or 20 watt LED conversion
kit with selectable CCT

Application

Energy efficient LED lamp solutions,
apartments and residential spaces

Design Specifications


- Aluminium heat sink mounted base
- Clear polycarbonate lens
- High efficiency LED optics, CRI >80
- Requires installation into a compatible luminaire
- Integral 12 or 20 watt LED, trailing edge dimmable driver
- Selectable CCT 3000K / 4000K / 5700K
- Supplied with clips and screws for easy installation

Performance

- Dimmable - Trailing edge*



Dimensions

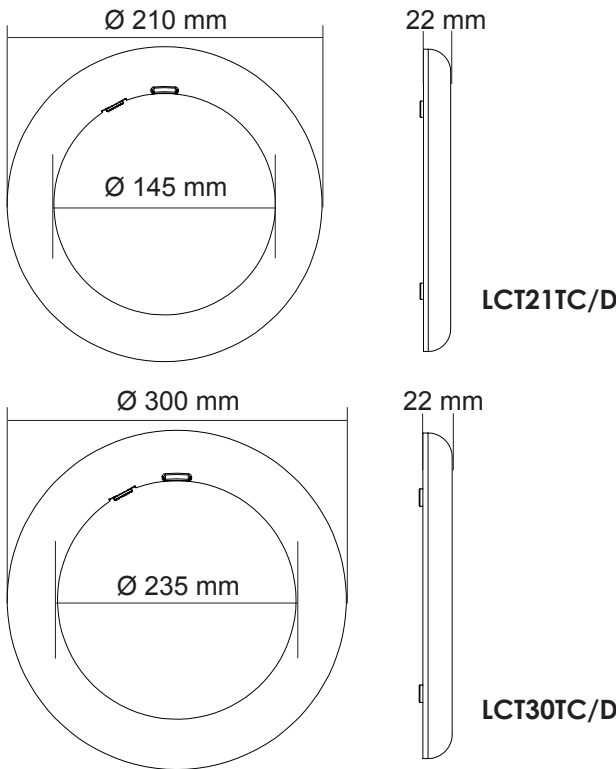


Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable
LCT21TC/D	240/50	12	1100/1300/1200	3000/4000/5700	> 80	Yes
LCT30TC/D	240/50	20	1800/2000/1900	3000/4000/5700	> 80	Yes

NOTE: * for compatible dimmers refer www.sal.net.au

For terms of catalogue data use, refer to INDEX



LG9 D/C CLEAR - 8W

DIMMABLE
GEMS COMPLIANT

8 watt, dimmable LED
filament GLS style lamps.

Application

Ideal for any residential
interior space

Design Specifications

- Clear glass diffuser, ES or BC base
- High efficiency LED filament, CRI >80
- Integral, trailing edge dimmable LED driver
- 320° beam distribution
- CCT choice of 2700K/5000K
- 1:1 size to traditional GLS lamps, dimmable, suits most GLS lamp fittings

Performance


- Dimmable - Trailing edge*



LG9 B22D/C

LG9 E27D/C

Dimensions

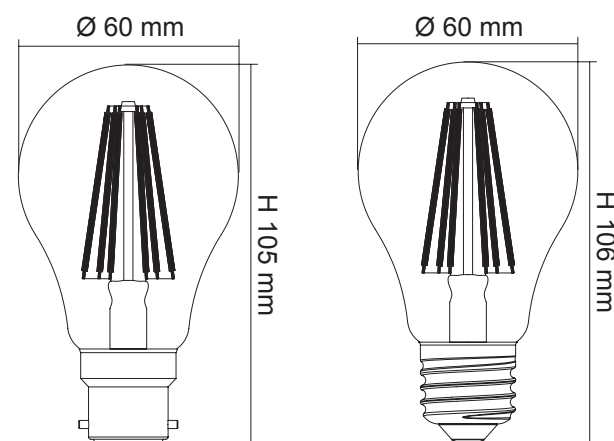


Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LG9/27B22D/C	240/50	8	950	2700	> 80	320°	Yes	B22
LG9/27E27D/C	240/50	8	950	2700	> 80	320°	Yes	E27
LG9/50B22D/C	240/50	8	1000	5000	> 80	320°	Yes	B22
LG9/50E27D/C	240/50	8	1000	5000	> 80	320°	Yes	E27

NOTE: * for compatible dimmers refer www.sal.net.au

For interior products, the IP rating stated is from below the ceiling



LG9 D OPAL - 8W

DIMMABLE
GEMS COMPLIANT

8 watt, dimmable LED
filament GLS style lamps.

Application

Ideal for any residential
interior space

Design Specifications

- Opal glass diffuser, ES or BC base
- High efficiency LED filament, CRI >80
- Integral, trailing edge dimmable LED driver
- 320° beam distribution
- CCT choice of 2700K / 5000K
- 1:1 size to traditional GLS lamps, suits most GLS lamp fittings

Performance


- Dimmable - Trailing edge*



LG9 B22

LG9 E27

Dimensions

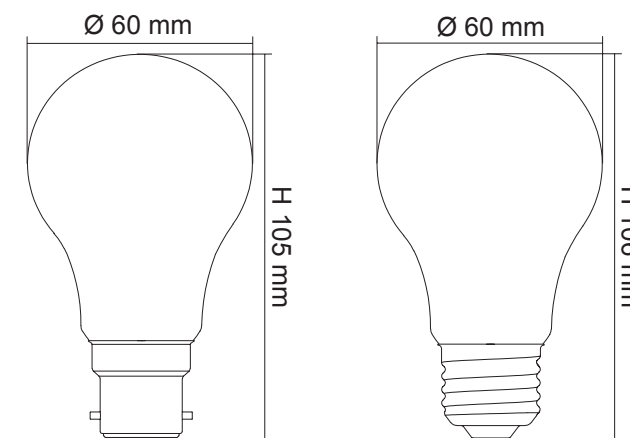


Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LG9/27B22D	240/50	8	900	2700	> 80	320°	Yes	B22
LG9/27E27D	240/50	8	900	2700	> 80	320°	Yes	E27
LG9/50B22D	240/50	8	950	5000	> 80	320°	Yes	B22
LG9/50E27D	240/50	8	950	5000	> 80	320°	Yes	E27

NOTE: * for compatible dimmers refer www.sal.net.au

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

LGS4TC OPAL - 4W

GEMS COMPLIANT

4 watt LED GLS style opal lamps

LGS8TC OPAL - 8W

GEMS COMPLIANT

8 watt LED GLS style opal lamps

LGS10TC OPAL - 10W

GEMS COMPLIANT

10 watt LED GLS style opal lamps

LGS14TC D OPAL - 12W

DIMMABLE

GEMS COMPLIANT


12 watt dimmable LED GLS style opal lamps

Application

Energy efficient LED lamp solutions

Design Specifications

- Opal polycarbonate diffuser, beam distribution 180°
- Poly covered aluminium body, B22 and E27 lamp bases
- High efficiency LED optics, CRI >80
- Integral non-dimmable LED driver, (LGS14TC D 12W is dimmable)
- CCT selectable 2700K / 4000K / 6000K
- 1:1 size to traditional GLS / A60 lamp, suits most GLS / A60 lamp fittings



TC SELECTABLE COLOUR




Performance

- Dimmable (For LGS14TC ONLY), Trailing edge*



Dimensions

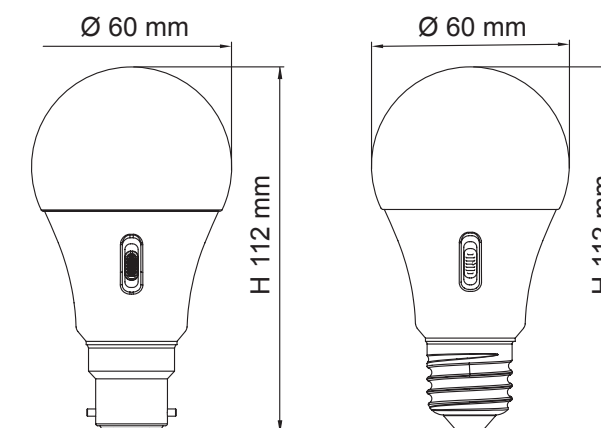


Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LGS4TC/B22	240/50	4	350/400/350	2700/4000/6000	> 80	180°	No	B22
LGS4TC/E27	240/50	4	350/400/350	2700/4000/6000	> 80	180°	No	E27
LGS8TC/B22	240/50	8	700/800/750	2700/4000/6000	> 80	180°	No	B22
LGS8TC/E27	240/50	8	700/800/750	2700/4000/6000	> 80	180°	No	E27
LGS10TC/B22	240/50	10	950/1050/1000	2700/4000/6000	> 80	180°	No	B22
LGS10TC/E27	240/50	10	950/1050/1000	2700/4000/6000	> 80	180°	No	E27
LGS14TC/B22D	240/50	12	1300/1400/1350	2700/4000/6000	> 80	180°	Yes	B22
LGS14TC/E27D	240/50	12	1300/1400/1350	2700/4000/6000	> 80	180°	Yes	E27

NOTE: * for compatible dimmers refer www.sal.net.au

For terms of catalogue data use, refer to INDEX

For interior products, the IP rating stated is from below the ceiling



LPAR20 - 7W IP65
GEMS COMPLIANT

7 watt PAR20 LED, IP65,
E27 lamp base

LPAR30 - 9W IP65
GEMS COMPLIANT

9 watt PAR30 LED, IP65,
E27 lamp base

Application

Perfect for retail and residential spaces

Design Specifications

- Opal polycarbonate diffuser,
- Poly covered aluminium body
- High efficiency LED optics,
CRI >80, beam distribution 100°
- Integral non-dimmable LED driver,
E27 lamp base
- CCT choice of 3000K / 6000K
- Designed for equivalent IP rated
PAR floodlights, installed in under
covered eave environments

Performance


- Non-dimmable



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LPAR20WW	240/50	7	600	3000	> 80	100°	No	E27
LPAR20DL	240/50	7	600	6000	> 80	100°	No	E27
LPAR30WW	240/50	9	820	3000	> 80	100°	No	E27
LPAR30DL	240/50	9	820	6000	> 80	100°	No	E27

For interior products, the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR

LPAR38TC - 12W IP65
GEMS COMPLIANT

12 watt PAR38 LED, IP65, E27 lamp base,
with selectable CCT

Application

Perfect for retail and residential spaces

Design Specifications

- Opal polycarbonate diffuser
- Poly covered aluminium body
- High efficiency LED optics,
CRI >80, beam distribution 100°
- Integral non-dimmable LED driver,
E27 lamp base
- Selectable CCT 3000K / 4000K / 6000K
- Designed for equivalent IP rated PAR
floodlights, installed in under
covered eave environments

Performance



- Non-dimmable




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LPAR38TC	240/50	12	1500/1700/1500	3000/4000/6000	> 80	100°	No	E27

For terms of catalogue data use, refer to INDEX

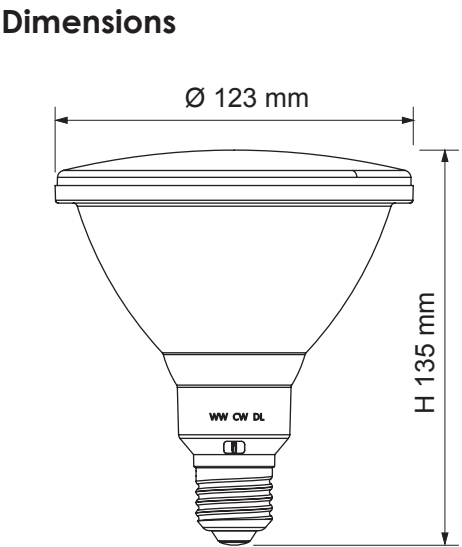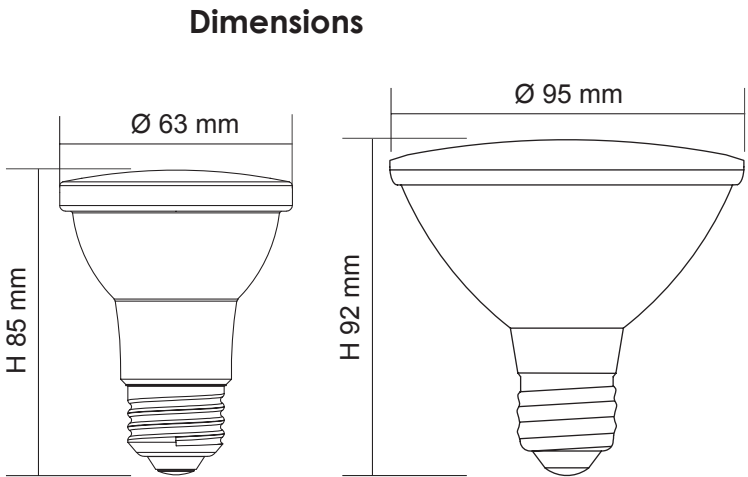



TC SELECTABLE COLOUR

LT SERIES LT407TC - 7W GEMS COMPLIANT

7 watt, LED tubular lamps.

Application


Energy efficient LED lamp solutions for residential spaces

Design Specifications


- Opal polycarbonate diffuser
- Poly covered aluminium body
- High efficiency LED optics, CRI >80, beam distribution 180°
- Integral non-dimmable LED driver
- Selectable CCT 3000K / 4000K / 6000K
- Suits most CFL lamp fitting, lamp bases B15, B22, E14, E27

Performance

- Non-dimmable

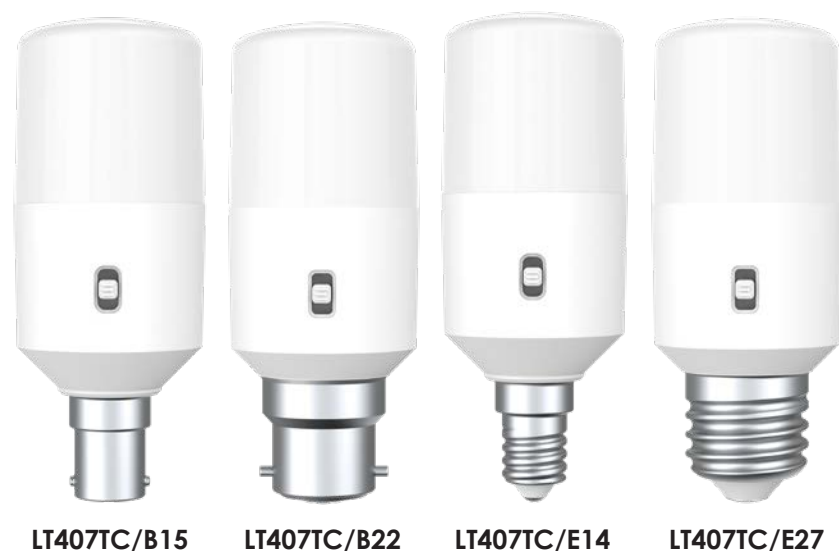


Dimensions

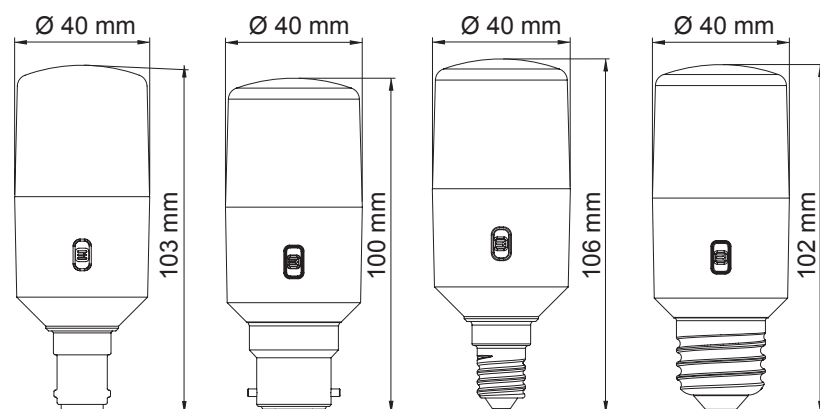

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LT407TC/B15	240/50	7	650/700/650	3000/4000/6000	> 80	180°	No	B15
LT407TC/E14	240/50	7	650/700/650	3000/4000/6000	> 80	180°	No	E14
LT407TC/B22	240/50	7	650/700/650	3000/4000/6000	> 80	180°	No	B22
LT407TC/E27	240/50	7	650/700/650	3000/4000/6000	> 80	180°	No	E27

For interior products, the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR

LT SERIES LT4012TC - 12W GEMS COMPLIANT

12 watt, non-dimmable LED tubular lamps with selectable CCT

Application

Energy efficient LED lamp solutions for residential spaces

Design Specifications


- Opal polycarbonate diffuser
- Poly covered aluminium body
- High efficiency LED optics, CRI >80, beam distribution 180°
- Integral, non-dimmable LED driver
- Selectable CCT 3000K / 4000K / 6000K
- Suits most traditional CFL lamp fittings, lamp bases B22, E27

Performance

- Non-dimmable




Dimensions

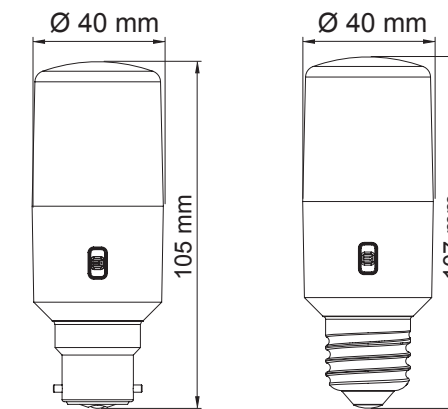

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LT4012TC/B22	240/50	12	1200/1500/1400	3000/4000/6000	> 80	180°	No	B22
LT4012TC/E27	240/50	12	1200/1500/1400	3000/4000/6000	> 80	180°	No	E27

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

LT SERIES
LT409TC - 9W
GEMS COMPLIANT

9 watt, non-dimmable LED
tubular lamps.

Application

Energy efficient LED lamp
solutions for residential spaces

Design Specifications

- Opal polycarbonate diffuser
- Poly covered aluminium body
- High efficiency LED optics, CRI >80,
beam distribution 180°
- Integral, non-dimmable LED driver
- Selectable CCT 3000K / 4000K / 6000K
- Suits most traditional CFL lamp fittings,
lamp bases B22, E27

Performance


- Non-dimmable



LT409TC/B22

LT409TC/E27


Dimensions

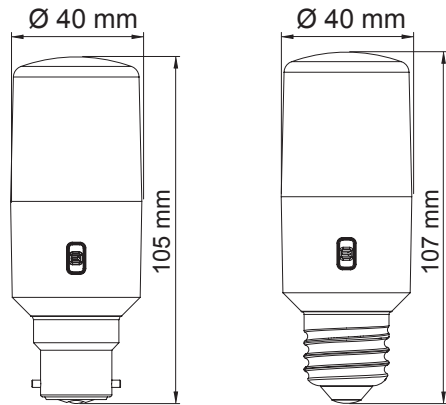

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LT409TC/B22	240/50	9	850/900/850	3000/4000/6000	> 80	180°	No	B22
LT409TC/E27	240/50	9	850/900/850	3000/4000/6000	> 80	180°	No	E27

For interior products, the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR

LT SERIES DIMMABLE
LT409TC D - 9W
GEMS COMPLIANT

9 watt, dimmable LED
tubular lamps

Application

Energy efficient LED lamp
solutions for residential spaces

Design Specifications

- Opal polycarbonate diffuser
- Poly covered aluminium body
- High efficiency LED optics, CRI >80,
beam distribution 180°
- Integral, dimmable LED driver
- Selectable CCT 3000K / 4000K / 6000K
- Suits most traditional CFL lamp fittings,
lamp bases B22, E27

Performance


- Dimmable - Trailing edge*



LT409TC/B22D

LT409TC/E27D

Dimensions

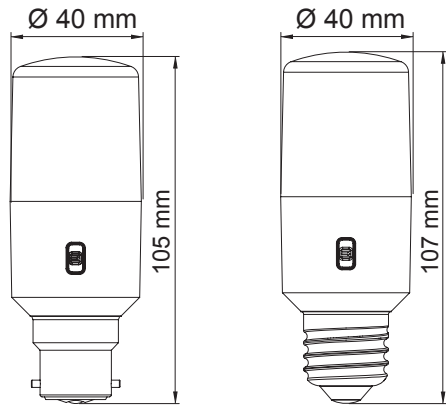


Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LT409TC/B22D	240/50	9	850/900/850	3000/4000/6000	> 80	180°	Yes	B22
LT409TC/E27D	240/50	9	850/900/850	3000/4000/6000	> 80	180°	Yes	E27

NOTE: * for compatible dimmers refer www.sal.net.au

For terms of catalogue data use, refer to INDEX



LT SERIES MP

LT409MP/TC - 3W/6W/9W

GEMS COMPLIANT

Multi-power, non-dimmable LED tubular lamps with selectable CCT

Application

Energy efficient LED lamp solutions for residential spaces

Design Specifications

- Opal polycarbonate diffuser
- Poly covered aluminium body
- High efficiency LED optics, CRI >80, beam distribution 180°
- Integral flickerCONTROLLED non-dimmable LED driver with selectable power 3/6/9watt
- Selectable CCT 3000K / 4000K / 6000K
- Suits most traditional CFL lamp fittings, lamp bases B22, E27

Performance


- Non-dimmable



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LT409MP/TC/B22	240/50	$\frac{3}{6}{9}$	$\frac{285}{570}{850}$ $\frac{300}{600}{900}$ $\frac{285}{570}{850}$	3000/4000/6000	> 80	180°	No	B22
LT409MP/TC/E27	240/50	$\frac{3}{6}{9}$	$\frac{285}{570}{850}$ $\frac{300}{600}{900}$ $\frac{285}{570}{850}$	3000/4000/6000	> 80	180°	No	E27

For interior products, the IP rating stated is from below the ceiling



LT SERIES MP DIMMABLE

LT409MP/TC D - 3W/6W/9W

GEMS COMPLIANT

Multi-power, dimmable LED tubular lamps with selectable CCT

Application

Energy efficient LED lamp solutions for residential spaces

Design Specifications

- Opal polycarbonate diffuser
- Poly covered aluminium body
- High efficiency LED optics, CRI >80, beam distribution 180°
- Integral flickerCONTROLLED dimmable LED driver with selectable power 3/6/9watt
- Selectable CCT 3000K / 4000K / 6000K
- Suits most traditional CFL lamp fittings, lamp bases B22, E27

Performance

- Dimmable - Trailing edge*




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LT409MP/TC/B22D	240/50	$\frac{3}{6}{9}$	$\frac{285}{570}{850}$ $\frac{300}{600}{900}$ $\frac{285}{570}{850}$	3000/4000/6000	> 80	180°	Yes	B22
LT409MP/TC/E27D	240/50	$\frac{3}{6}{9}$	$\frac{285}{570}{850}$ $\frac{300}{600}{900}$ $\frac{285}{570}{850}$	3000/4000/6000	> 80	180°	Yes	E27

NOTE: * for compatible dimmers refer www.sal.net.au

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

LT SERIES
LT4014TC - 14W
GEMS COMPLIANT

14 watt, non-dimmable LED tubular lamps with selectable CCT

Application

Energy efficient LED lamp solutions for residential spaces

Design Specifications

- Opal polycarbonate diffuser
- Poly covered aluminium body
- High efficiency LED optics, CRI >80, beam distribution 180°
- Integral, non-dimmable LED driver
- Selectable CCT 3000K / 4000K / 6000K
- Suits most traditional CFL lamp fittings, lamp bases B22, E27

Performance


- Non-dimmable



LT4014TC/B22

LT4014TC/E27


Dimensions

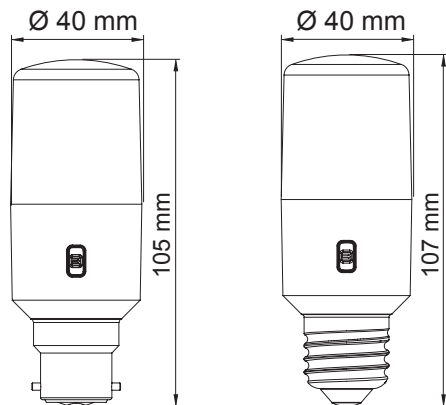

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LT4014TC/B22	240/50	14	1400/1650/1600	3000/4000/6000	> 80	180°	No	B22
LT4014TC/E27	240/50	14	1400/1650/1600	3000/4000/6000	> 80	180°	No	E27

For interior products, the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR

LT SERIES DIMMABLE
LT4014TC D - 14W
GEMS COMPLIANT

14 watt, dimmable LED tubular lamps with selectable CCT

Application

Energy efficient LED lamp solutions for residential spaces

Design Specifications

- Opal polycarbonate diffuser
- Poly covered aluminium body
- High efficiency LED optics, CRI >80, beam distribution 180°
- Integral, dimmable LED driver
- Selectable CCT 3000K / 4000K / 6000K
- Suits most traditional CFL lamp fittings, lamp bases B22, E27

Performance


- Dimmable - Trailing edge*



LT4014TC/B22D

LT4014TC/E27D

Dimensions

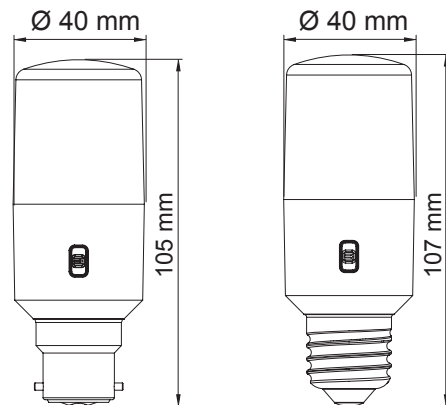


Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LT4014TC/B22D	240/50	14	1400/1650/1600	3000/4000/6000	> 80	180°	Yes	B22
LT4014TC/E27D	240/50	14	1400/1650/1600	3000/4000/6000	> 80	180°	Yes	E27

NOTE: * for compatible dimmers refer www.sal.net.au

For terms of catalogue data use, refer to INDEX



MR16DIM - 9W
DIMMABLE
GEMS COMPLIANT

Dimmable, 9 watt MR16 profile LED

Application

Ideal for any residential interior space

Design Specifications


- Shockproof frosted polycarbonate lens
- Die-cast aluminium body
- High efficiency LED optics, CRI >80
- Dimmable only with SAL MINI60 driver
- Beam distribution 60°
- CCT choice of 3000K / 4000K / 5700K
- Lamp base GU5.3

Performance

- Dimmable - Trailing edge*



Dimensions

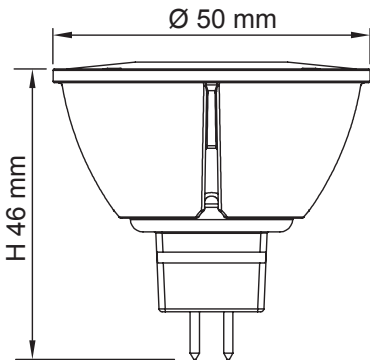


Technical Specifications

Model No.	Input (V AC/DC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
MR16DIM9WW	12	9	550	3000	> 80	60°	Yes	GU5.3
MR16DIM9CW	12	9	550	4000	> 80	60°	Yes	GU5.3
MR16DIM9DL	12	9	550	5700	> 80	60°	Yes	GU5.3

NOTE: * for compatible dimmers refer www.sal.net.au

For interior products, the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR

MR16 TC - 4W/6W
GEMS COMPLIANT

Non-dimmable 4 watt / 6 watt - MR16 profile shape LED, with selectable CCT

Application

Ideal for any residential interior space

Design Specifications


- Shockproof frosted polycarbonate lens
- Die-cast aluminium body
- High efficiency LED optics, CRI >80
- Recommended driver is the SAL MINI60
- Beam distribution 38°
- Selectable CCT 3000K / 4000K / 6000K
- Lamp base GU5.3

Performance

- Non-dimmable



Dimensions

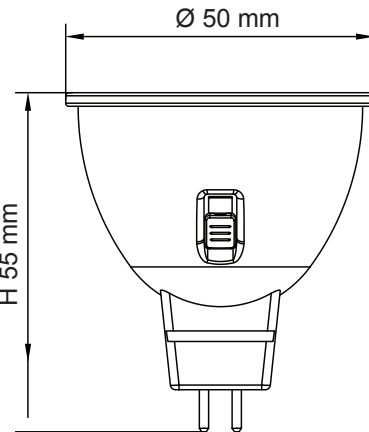


Technical Specifications

Model No.	Input (V AC/DC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
MR16/5W/TC	12	4	360/400/380	3000/4000/6000	> 80	38°	No	GU5.3
MR16/7W/TC	12	6	500/600/550	3000/4000/6000	> 80	38°	No	GU5.3

NOTE: * for compatible dimmers refer www.sal.net.au

For terms of catalogue data use, refer to INDEX



MR16CC7KIT/WW - 7W
DIMMABLE

Dimmable 7 watt - MR16 profile shape LED lamp complete with driver, flex and plug

Application

Ideal for any residential interior space

Design Specifications

- Shockproof frosted polycarbonate lens
- Die-cast aluminium body
- High efficiency LED optics, CRI>80
- Kit includes lamp, constant current driver, flex and plug
- Beam distribution 60°
- 3000K CCT
- Lamp base GU5.3, mandatory replacement lamp SAL CC7KIT/LAMP

Performance

- Dimmable - Trailing edge*




Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
MR16CC7KIT/WW	240V KIT	7	500	3000	> 80	60°	Yes	GU5.3
CC7KIT/LAMP	LAMP	7	500	3000	> 80	60°	Yes WITH KIT	GU5.3



Dimensions

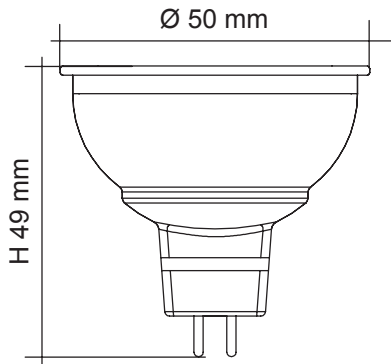

For interior products, the IP rating stated is from below the ceiling



SPECIALTY - PILOT CLEAR
LP25 - 1.5W

1.5 watt LED filament tubular pilot lamp

SPECIALTY - TUBULAR CLEAR
LT25 - 2W

2 watt LED filament tubular lamp

Application

Energy efficient LED lamp solutions for residential spaces

Design Specifications

- Clear glass diffuser, E14 base, 240V
- High efficiency LED filament, CRI >80
- Integral non-dimmable LED driver
- 320° beam distribution
- CCT 3000K
- Suitable to replace equivalent GLS tubular lamps or standard duty pilot lamps

Performance

- Non-dimmable



Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LP25F830E14	240/50	1.5	150	3000	> 80	320°	No	E14
LT25F830E14	240/50	2	200	3000	> 80	320°	No	E14




LP25F830E14

LT25F830E14

Dimensions

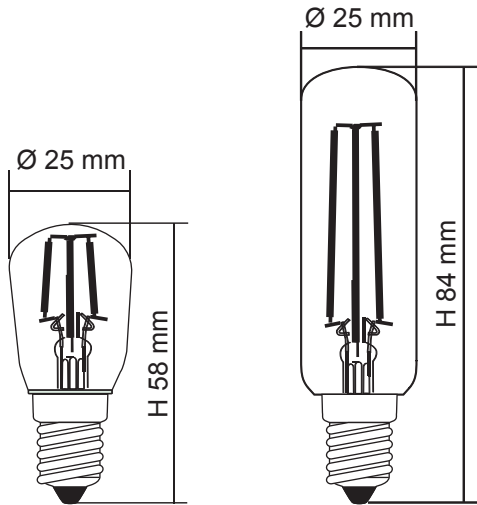

For terms of catalogue data use, refer to INDEX



R LAMP LR50 - 6W
GEMS COMPLIANT

6 watt, LED directional R shaped lamps

R LAMP LR63 - 8W
GEMS COMPLIANT

8 watt, LED directional R shaped lamps.

R LAMP LR80 - 9W
GEMS COMPLIANT

9 watt, LED directional R shaped lamps.

Application

Perfect for residential spaces

Design Specifications

- Opal polycarbonate diffuser, 120° beam distribution
- Poly covered aluminium body
- High efficiency LED optics, CRI >80
- Integral non-dimmable LED driver
- CCT choice of 2700K / 6500K
- 1:1 size to traditional R shaped lamps, suits most R lamp fittings

Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LR50WW	240/50	6	490	2700	> 80	120°	No	E14
LR50DL	240/50	6	490	6500	> 80	120°	No	E14
LR63WW	240/50	8	710	2700	> 80	120°	No	E27
LR63DL	240/50	8	710	6500	> 80	120°	No	E27
LR80WW	240/50	9	850	2700	> 80	120°	No	E27
LR80DL	240/50	9	850	6500	> 80	120°	No	E27



LR50

LR63 & LR80

Dimensions

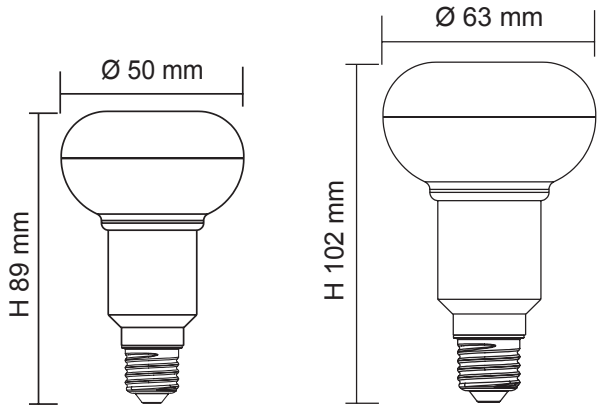


Performance

- Non-dimmable



For interior products, the IP rating stated is from below the ceiling



R LAMP DIMMABLE LR50/D - 5W
GEMS COMPLIANT

5 watt, LED directional R shaped lamps.

R LAMP DIMMABLE LR63/D - 7W
GEMS COMPLIANT

7 watt, LED directional R shaped lamps.

R LAMP DIMMABLE LR80/D - 7W
GEMS COMPLIANT

7 watt, LED directional R shaped lamps.

Application

Perfect for residential spaces

Design Specifications

- 120° beam distribution
- Mirror reflector, glass body profile
- High efficiency filament LED
- Integral dimmable LED driver
- CCT choice of 2700K / 6000K, CRI 80
- 1:1 size to traditional R lamp, suits most R shaped lamp fittings, double insulated

Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LR50WW/D	240/50	5	380	2700	> 80	120°	Yes	E14
LR50DL/D	240/50	5	480	6000	> 80	120°	Yes	E14
LR63WW/D	240/50	7	600	2700	> 80	120°	Yes	E27
LR63DL/D	240/50	7	800	6000	> 80	120°	Yes	E27
LR80WW/D	240/50	7	650	2700	> 80	120°	Yes	E27
LR80DL/D	240/50	7	800	6000	> 80	120°	Yes	E27



LR50/D

LR63/D & LR80/D

Dimensions

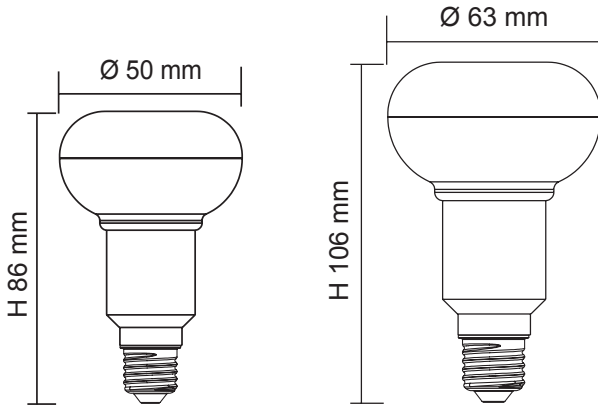


Performance

- Dimmable - Trailing edge*



NOTE: * for compatible dimmers refer www.sal.net.au

For terms of catalogue data use, refer to INDEX



SPHERICAL CLEAR DIMMABLE
LG95 - 6W
GEMS COMPLIANT

6 watt dimmable LED filament
clear spherical lamp

SPHERICAL CLEAR DIMMABLE
LG125 - 8W
GEMS COMPLIANT

8 watt, dimmable LED filament
clear spherical lamp.

Application

Energy efficient Deco LED lamp
solutions, B22 or E27 bases

Design Specifications

- Clear glass diffuser, B22 or E27 bases
- High efficiency LED filament and colour rendering, CRI >80
- Integral trailing edge dimmable LED driver
- 320° beam angle
- Colour temperature, choice of 2700K/5000K
- 1:1 size to traditional spherical lamp, dimmable, Suits most spherical lamp fittings
- Double insulation

Performance

- Dimmable Driver - Yes
- Dimmer Type - Trailing edge*





NOTE: * for compatible dimmers refer www.sal.net.au



LG95/B22D/C

Dimensions

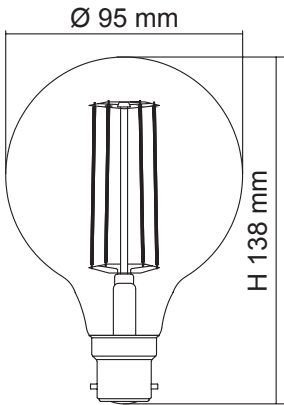




LG95/E27D/C



LG125/B22D/C



LG125/E27D/C

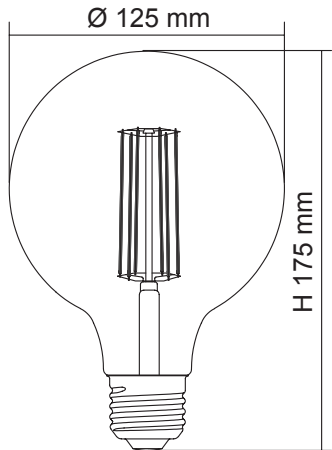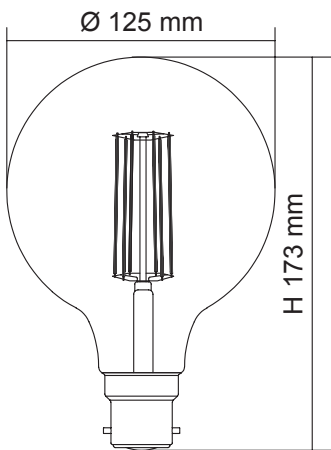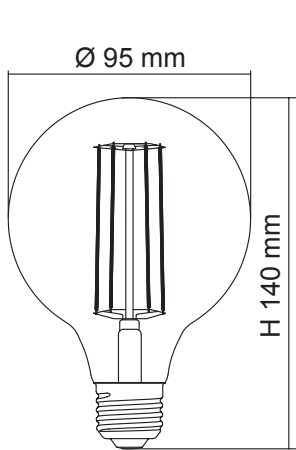


Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LG95/27B22D/C	240/50	6	750	2700	> 80	320°	Yes	B22
LG95/27E27D/C	240/50	6	750	2700	> 80	320°	Yes	E27
LG95/50B22D/C	240/50	6	800	5000	> 80	320°	Yes	B22
LG95/50E27D/C	240/50	6	800	5000	> 80	320°	Yes	E27
LG125/27B22D/C	240/50	8	950	2700	> 80	320°	Yes	B22
LG125/27E27D/C	240/50	8	950	2700	> 80	320°	Yes	E27
LG125/50B22D/C	240/50	8	1000	5000	> 80	320°	Yes	B22
LG125/50E27D/C	240/50	8	1000	5000	> 80	320°	Yes	E27

For interior products, the IP rating stated is from below the ceiling

For terms of catalogue data use, refer to INDEX



SPHERICAL OPAL DIMMABLE
LG95 - 10W
GEMS COMPLIANT

10 watt, dimmable LED filament
opal spherical lamp

SPHERICAL OPAL DIMMABLE
LG125 - 12W
GEMS COMPLIANT

12 watt, dimmable LED filament
opal spherical lamp

Application

Energy efficient Deco LED lamp
solutions, B22 or E27 bases

Design Specifications

- Opal polycarbonate diffuser
- Poly covered aluminium body,
B22 or E27 lamp bases
- High efficiency LED optics,
beam distribution 240°
- Integral trailing edge dimmable LED driver
- CCT choice of 3000K/ 6000K, CRI >80
- 1:1 size to traditional spherical lamps,
dimmable, suits most spherical lamp fittings

Performance

- Dimmable Driver - Yes
- Dimmer Type - Trailing edge





NOTE: * for compatible dimmers refer www.sal.net.au



LG95/B22

Dimensions

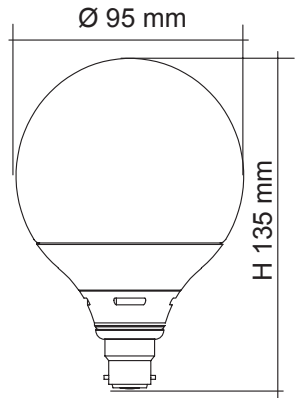




LG95/E27



LG125/B22



LG125/E27

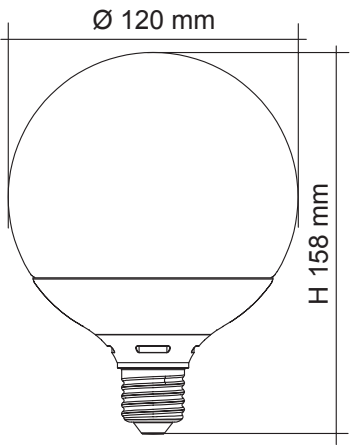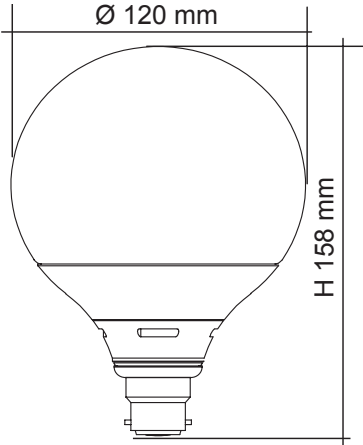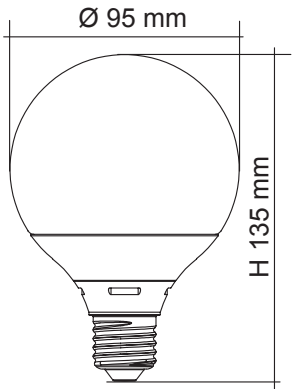


Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LG95/830B22	240/50	10	900	3000	> 80	240°	Yes	B22
LG95/860B22	240/50	10	900	6000	> 80	240°	Yes	B22
LG95/830E27	240/50	10	1000	3000	> 80	240°	Yes	E27
LG95/860E27	240/50	10	1000	6000	> 80	240°	Yes	E27
LG125/830B22	240/50	12	1200	3000	> 80	240°	Yes	B22
LG125/860B22	240/50	12	1200	6000	> 80	240°	Yes	B22
LG125/830E27	240/50	12	1200	3000	> 80	240°	Yes	E27
LG125/860E27	240/50	12	1200	6000	> 80	240°	Yes	E27

For interior products, the IP rating stated is from below the ceiling

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

LED TUBE LT8 TC - 9W/18W/24W GEMS COMPLIANT

LED shatter-proof tube, G13 base

Application

Energy efficient LED lamp solutions

Design Specifications

- Fit new T8 LED fixture or retrofit T8 fluorescent fixture (Magnetic Ballast)
- Traditional full glass shatter-proof poly coated body construction
- G13 lamp base
- High efficiency LED optics, CRI >80, beam distribution 200°
- Integral non-dimmable LED driver, 9 or 18 or 24 watt models
- Selectable CCT 3000K/4000K/6000K
- No flicker, instant start, Safety LED fuse included

Performance

- Non-dimmable




WARNING:

The luminaire that these LED tubes are installed in may need to be converted in accordance with AS/NZS60598.2.1:2014 by a suitably qualified person. In all instances any electronic components (i.e. driver, electronic ballast, capacitor) must be removed from the circuit. Refer installation instructions for more details, in particular the lamp orientation to the ACTIVE supply.

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions D x L mm	Lamp Base
LT8/60TC	240/50	9	950/1050/950	3000/4000/6000	> 90	200°	Ø 28 x 589	G13
LT8/120TC	240/50	18	1750/1900/1750	3000/4000/6000	> 90	200°	Ø 28 x 1198	G13
LT8/150TC	240/50	24	2350/2400/2350	3000/4000/6000	> 90	200°	Ø 28 x 1500	G13

For interior products, the IP rating stated is from below the ceiling



VINTAGE DECO LST21 - 1W/8W GEMS COMPLIANT

1 watt or 8 watt, LED filament vintage deco lamp, B22 & E27 base.

Application

Energy efficient LED lamp solutions, ideal for restaurants and residential features

Design Specifications

- Glass diffuser for decorative applications
- High efficiency LED filament and colour rendering, CRI >80,
- CCT choice of 2200K / 3000K / 5000K
- Integral dimmable LED driver (8 watt only) , 240V
- 320° beam distribution

Performance

- Dimmable - (8 watt only) Trailing edge*




LST21FD822/E27

LST21/B22D/C

LST21/E27D/C

Dimensions

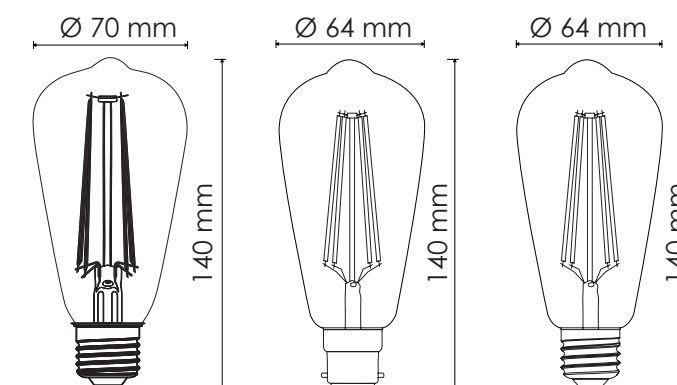

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LST21FD822E27	240/50	1	100	2200	> 80	320°	No	E27
LST21WWB22D/C	240/50	8	1050	3000	> 80	320°	Yes	B22
LST21WWE27D/C	240/50	8	1050	3000	> 80	320°	Yes	E27
LST21NDLB22D/C	240/50	8	1050	5000	> 80	320°	Yes	B22
LST21NDLE27D/C	240/50	8	1050	5000	> 80	320°	Yes	E27

NOTE: * for compatible dimmers refer www.sal.net.au

For terms of catalogue data use, refer to INDEX

SMARTER LIGHTING CHOICES



🏠 SAL National Pty Ltd - 40 Biloela St, Villawood NSW 2163

☎ + 61 2 9723 3099

🌐 www.sal.net.au

✉ info@sal.net.au

🏠 VICT/TAS - 46/48 Keys Road Moorabbin VIC 3189

☎ + 61 3 9532 3168

✉ info@sal.net.au

🏠 QLD - 36 Whitelaw Place Richlands QLD 4077

☎ + 61 7 3879 5999

✉ info@sal.net.au

🏠 SA/NT - 79 Frederick St, Welland SA 5009

☎ +61 8 7084 1958

✉ info@sal.net.au

🏠 WA - 29 Beringarra Avenue Malaga WA 6090

☎ +61 8 9248 7458

✉ info@sal.net.au



2026/28