

SMARTER LIGHTING CHOICES



SAL Lighting a Smarter Future  




2026/28







A select range of high performance, decorative area luminaires designed for security, perimeter and car park spaces.

P396 DRIVE SHP305/306



P398 PORT MKIII SHP210 MP

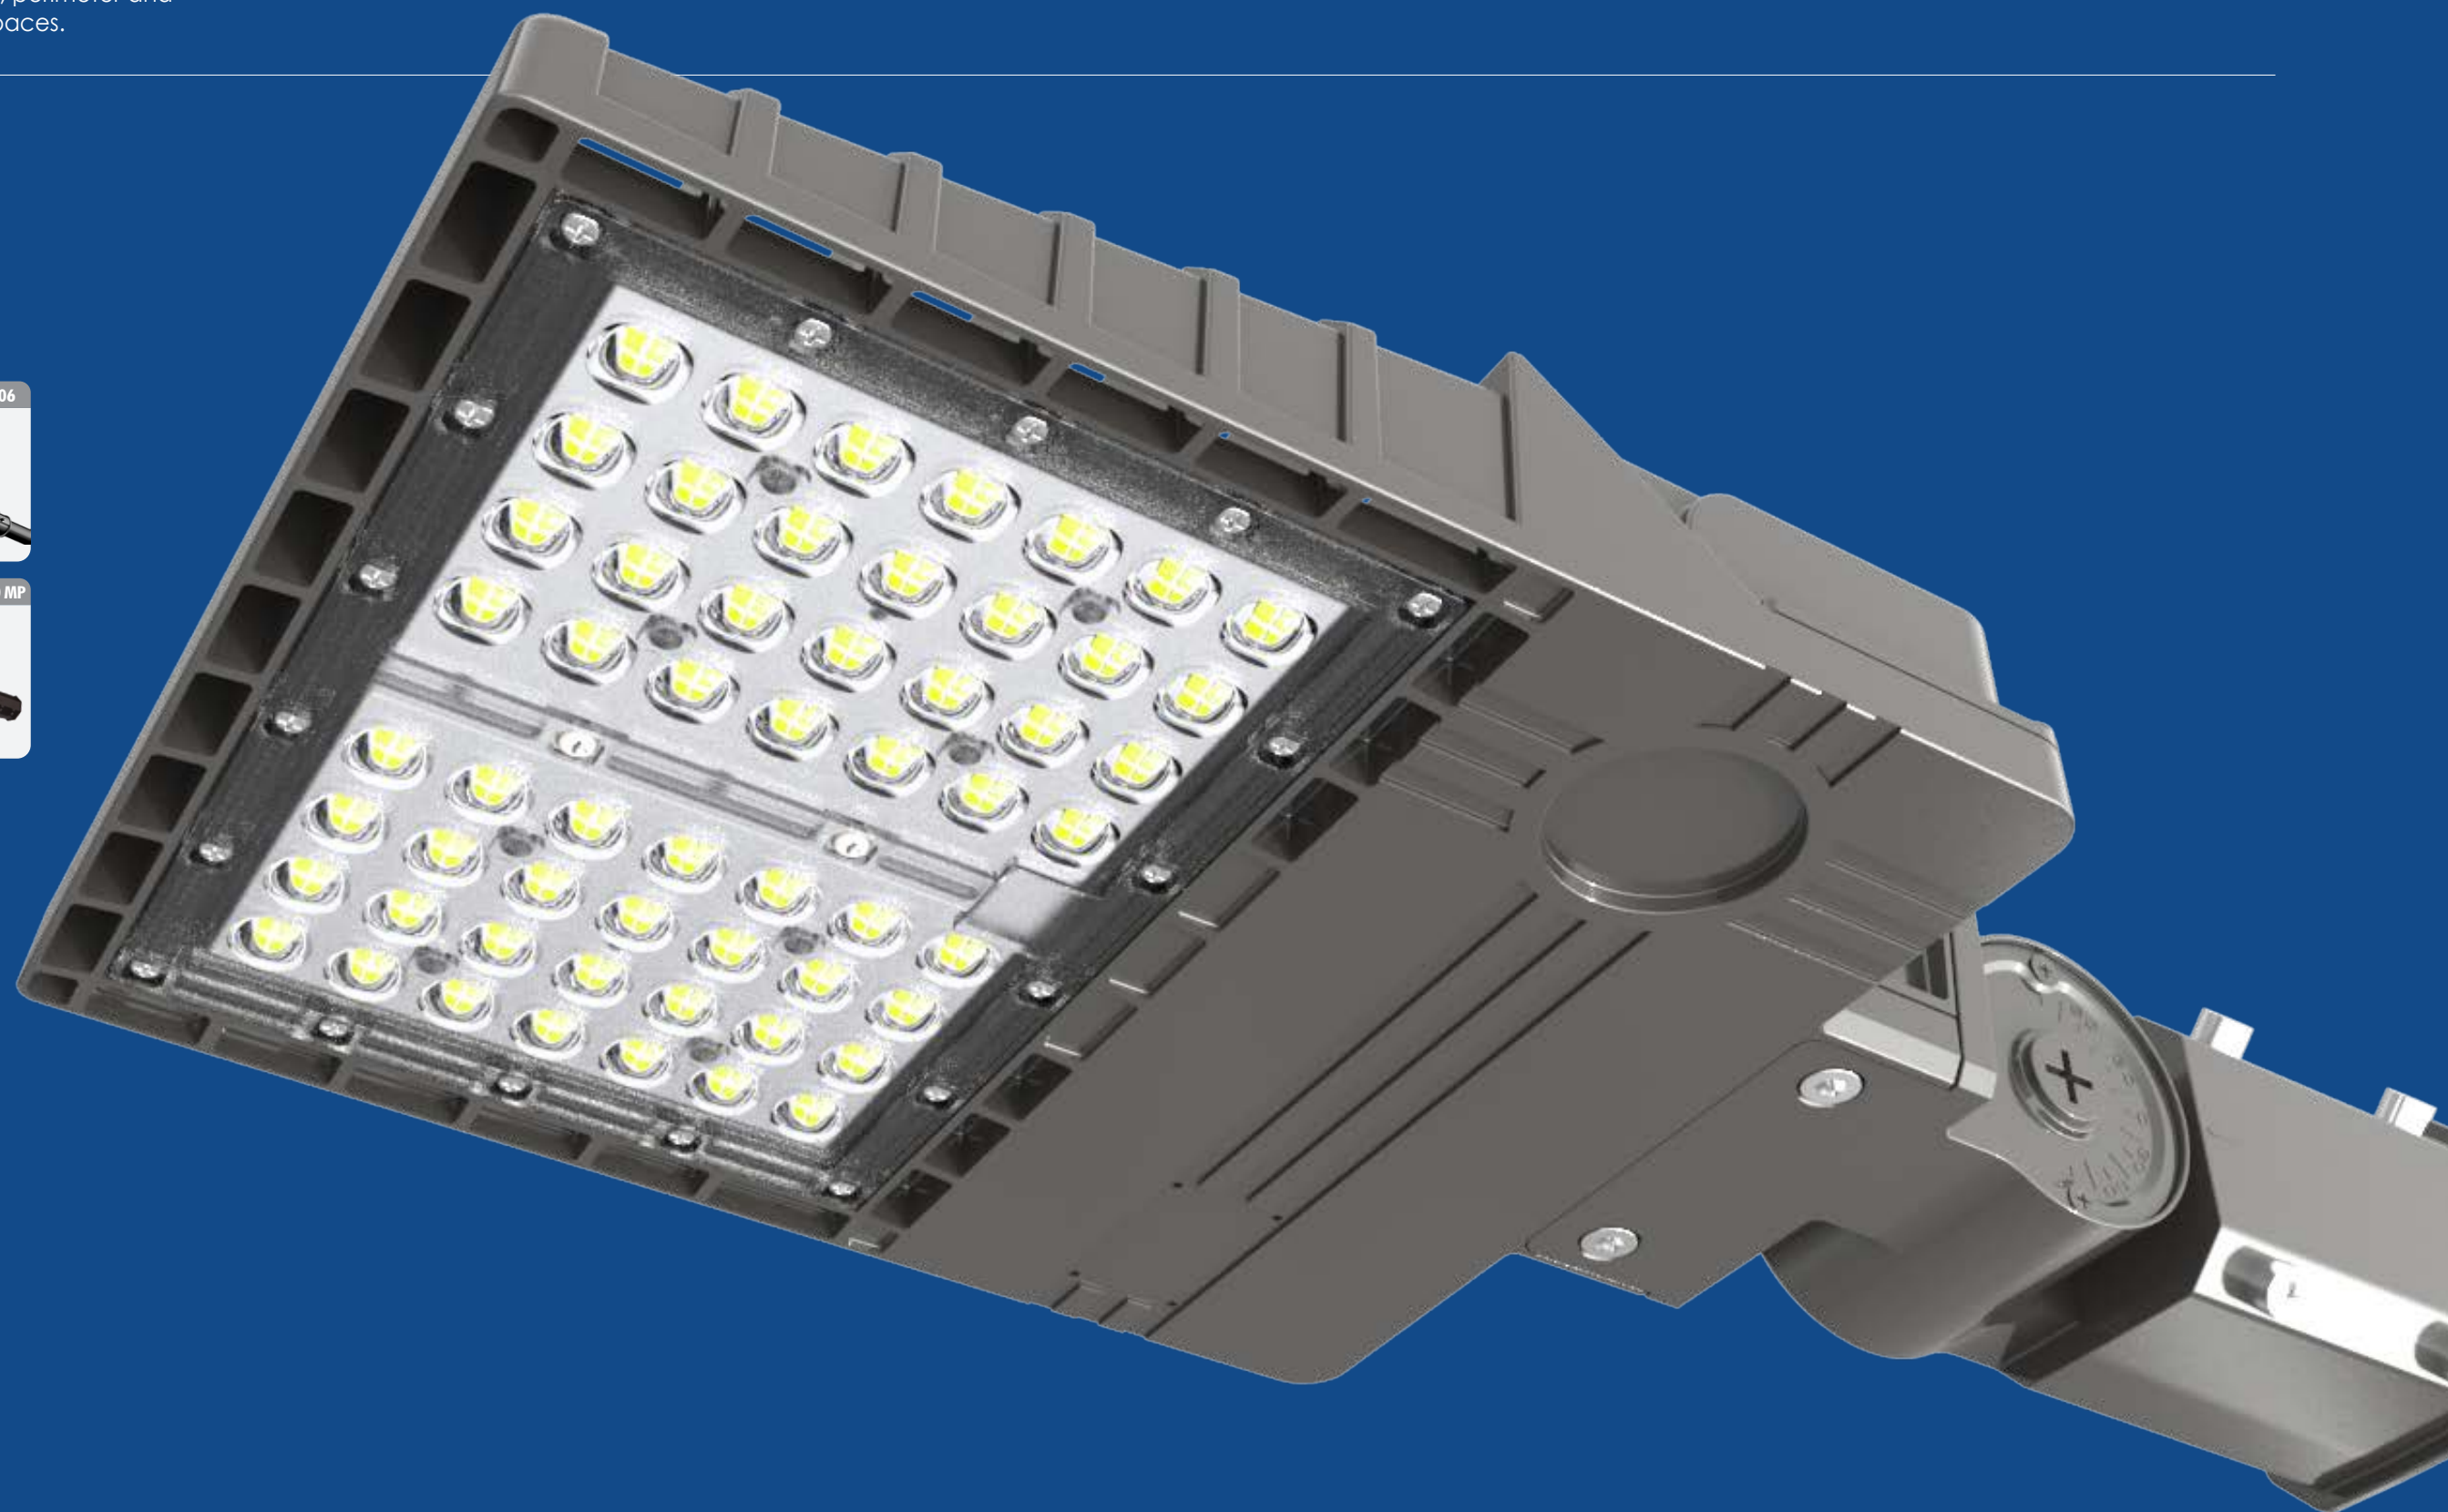



DRIVE
SHP305 - 70W/180W

70 - 180 watt, IP66 LED street luminaire, IK08 rated

DRIVE
SHP306 - 30W/90W

30 - 90 watt, IP66 LED street luminaire, IK08 rated

Application

A decorative, streamline exterior commercial solution

Design Specifications

- Stylish die-cast aluminium body, durable powder coated finish
- Integral constant current non-dimmable LED driver as standard, CCT 5000K, optional 4000K
- Asymmetrical light distribution (TYPE II) fitted, 0% upward light ratio, clear tempered glass diffuser
- Standard 3G.ANSI C.136.31-2010 Ø 60 pole mounting bracket, 800 mm 3 core rubber flex
- Optional constant current dimmable LED driver with 3 IN 1 dimming LED driver (1-10V DC, PWM signal & resistance)
- Lens option (refer to Photometric data below) SHP305A75/P (standard), SHP305A45/P (option), optional PE cell configurations available
- Lens option - SHP306A45/P (standard), SHP306A75/P (option), optional PE cell configurations available


Performance

- Dimmable - Optional, 1-10V DC
- Optional PE Cell control




SHP305

Dimensions

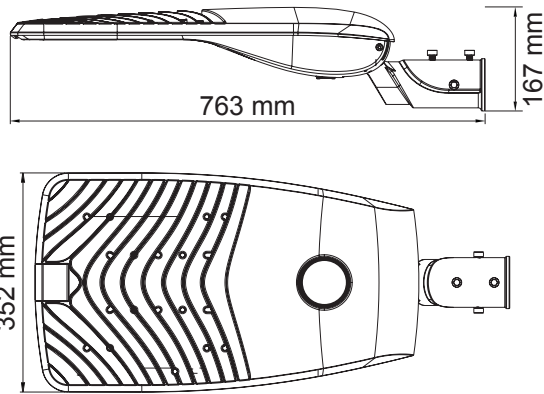


Photometric Data

Unit: cd C0/C180 C90/C270

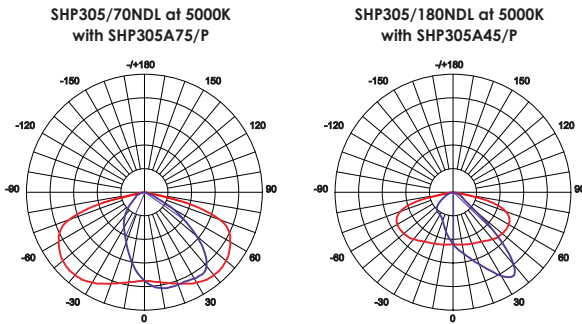


SHP306

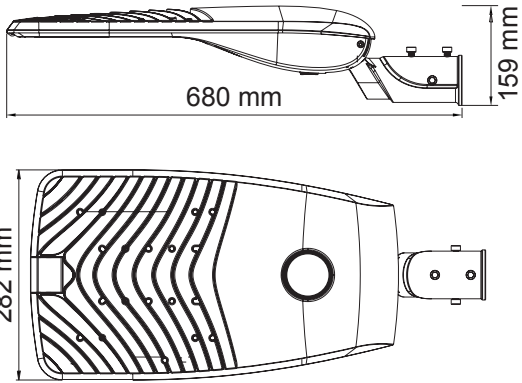

Photometric Data

Unit: cd C0/C180 C90/C270

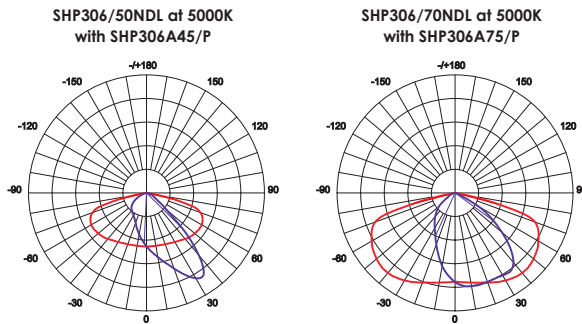

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (L x W x H mm)
SHP305/70NDL/BK	240/50	70	9100	5000	> 70	Black	763 x 352 x 167
SHP305/90NDL/BK	240/50	90	11700	5000	> 70	Black	763 x 352 x 167
SHP305/120NDL/BK	240/50	120	15600	5000	> 70	Black	763 x 352 x 167
SHP305/150NDL/BK	240/50	150	19500	5000	> 70	Black	763 x 352 x 167
SHP305/180NDL/BK	240/50	180	23400	5000	> 70	Black	763 x 352 x 167
SHP306/30NDL/BK	240/50	30	3900	5000	> 70	Black	680 x 282 x 159
SHP306/50NDL/BK	240/50	50	6500	5000	> 70	Black	680 x 282 x 159
SHP306/70NDL/BK	240/50	70	9100	5000	> 70	Black	680 x 282 x 159
SHP306/90NDL/BK	240/50	90	11700	5000	> 70	Black	680 x 282 x 159

For terms of catalogue data use, refer to INDEX



MULTI POWER

PORT MKIII
SHP210 MP/NDL - 70W/310W

IP66 LED area luminaire, IK10
rated with selectable power

Application

A decorative and versatile exterior
commercial solution





Design Specifications

- Stylish die-cast aluminium body, durable powder coated finish in charcoal black
- Adjustable spigot (60mm OD) mounting, 0 - 90°
- High efficiency LED optics, CRI >70, CCT 5000K
- Integral constant current non-dimmable LED driver, pre-wired with 1500mm of 3 core rubber flex for easy termination
- Light distribution - Standard Symmetric (Type V), optional to order Type III or Type IV
- PEB shorting cap provided as standard, optional PE cell configurations available



Photometric Data

Unit: cd C0/C180 C90/C270

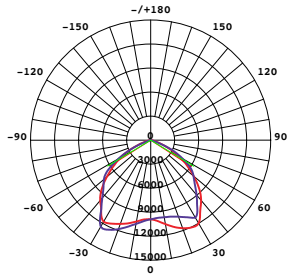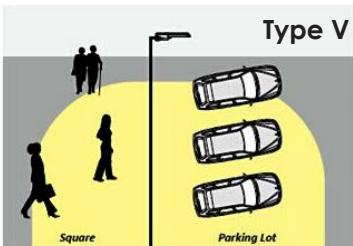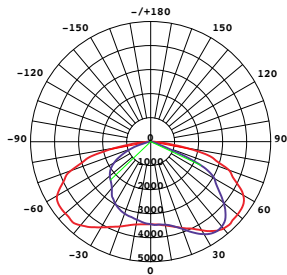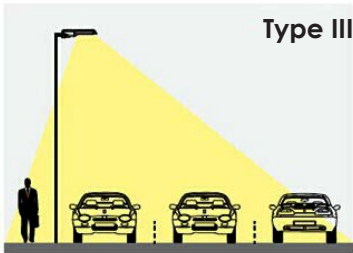

Performance

- Non-dimmable
- In Built Sensor - Optional
- Sensor Type - PE



Accessories



SHP210G3PE
PE CELL



SHP210G3UB
UNIVERSAL BRACKET

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Body Colour	Dimensions (L x W x H mm)
SHP210/70MP/NDL	240/50	70	5100/6800/8500/11900	5000	Charcoal Black	375 x 299 x 65
SHP210/150MP/NDL	240/50	150	12000/15000/18000/22500	5000	Charcoal Black	375 x 299 x 65
SHP210/240MP/NDL	240/50	240	25500/30000/33000/36000	5000	Charcoal Black	415 x 299 x 65
SHP210/300MP/NDL	240/50	310	36000/39000/42000/46500	5000	Charcoal Black	545 x 299 x 82

For terms of catalogue data use, refer to INDEX



SMARTER LIGHTING CHOICES



 SAL National Pty Ltd - 40 Biloela St, Villawood NSW 2163

 + 61 2 9723 3099

 www.sal.net.au

 info@sal.net.au

 VICT/TAS - 46/48 Keys Road Moorabbin VIC 3189

 + 61 3 9532 3168

 info@sal.net.au

 QLD - 36 Whitelaw Place Richlands QLD 4077

 + 61 7 3879 5999

 info@sal.net.au

 SA/NT - 79 Frederick St, Welland SA 5009

 +61 8 7084 1958

 info@sal.net.au

 WA - 29 Beringarra Avenue Malaga WA 6090

 +61 8 9248 7458

 info@sal.net.au



2026/28