



# SMARTER LIGHTING CHOICES

SINCE 1998



INTERIOR LIGHTING



EXTERIOR LIGHTING





SMART LIGHTING  
CONTROLS



# LED DOWNLIGHTS

An extensive suite of innovative LED recessed and surface mount downlights, with a wide selection of colours and dimming choices.





Before selecting a downlight look out for the marks of Compliance and Safety. Starting with the RCM mark, this signals that the product has been tested to all relevant Australian Safety Standards and EMC, to ensure the product delivers its designed safety performance. In addition and when thermal insulation batts are installed in the ceiling cavity, look out for the IC rating to ensure the product is suitable for such an application.





For Interior products, the designated IP rating is "from below the ceiling" unless otherwise specified.

A hand is shown from the bottom, cupping a mound of dark, rich soil. A small tree with a light-colored trunk and a dense, rounded canopy of green leaves is growing out of the soil. The background is a soft, out-of-focus green gradient.

# CREATING SMARTER ENERGY EFFICIENT LIGHTING SOLUTIONS

Look out for our sustainable products  
listed in the catalogue index.





For Interior products, the designated IP rating is "from below the ceiling" unless otherwise specified.



TC SELECTABLE

## TRADER S9140TC - 8W

Dimmable IP44, 8 watt LED downlight with selectable colour temperature

### Application


Ideal for any residential or commercial interior space

### Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Durable extruded aluminium recessed mount body profile, IC - 4 rated
- Stylish white powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- Constant current trailing edge dimmable LED driver, with flex and plug
- Deco ring options - Satin Nickel (S9140SN/RING)



### Dimensions

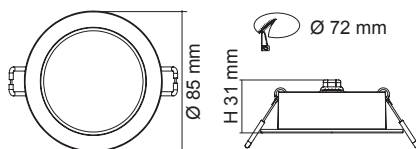


### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: 1-10V, DALI / DSI



### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9140TC at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9140TC/WH	240/50	8	650/700/700	3000/4000/5700	> 80	90°	Yes	White









TC SELECTABLE

## TRADER S9141TC - 9W

Dimmable IP44, 9 watt LED downlight with selectable colour temperature

### Application


Ideal for any residential or commercial interior space

### Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Durable die-cast aluminium body profile, IC - 4 rated
- Stylish white powder coat finish
- Colour trim options: Satin Nickel (S9141SN/RING), Black (S9141BK/RING)
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- Constant current trailing edge dimmable LED driver



### Dimensions

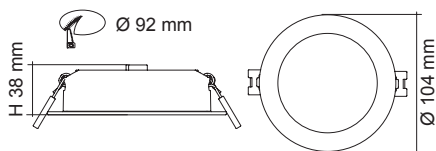


### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: 1-10V, DALI / DSI



### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9141TC at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9141TC/WH	240/50	9	700/850/800	3000/4000/5700	> 80	90°	Yes	White

For terms and conditions of catalogue data use, refer to INDEX



TC SELECTABLE

## TRADER S9141TC SM - 9W

Dimmable IP20, 9 watt surface mount LED downlight with selectable colour temperature

### Application

Ideal for any surface mount, residential or commercial interior space design

### Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Durable aluminium surface mount body profile, IP20
- Stylish white or black powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- Integral built-in constant current trailing edge dimmable LED driver



### Dimensions



### Performance


Dimmable Driver - Yes

Dimmer Type - Trailing edge

### Photometric Data

Unit: cd C0/C180 — C90/C270

S9141TC SM at 4000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9141TC/WH/SM	240/50	9	700/850/800	3000/4000/5700	> 80	90°	Yes	White
S9141TC/BK/SM	240/50	9	700/850/800	3000/4000/5700	> 80	90°	Yes	Black



TC SELECTABLE

## ECOGEM S9041 TC - 10W

Dimmable IP44 LED downlight with selectable colour temperature

### Application


Ideal for any residential or commercial interior space

### Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Durable die-cast aluminium body profile
- Stylish white powder coat finish or Satin Nickel
- Colour trim options: Black ring (S9041 BK RING), Satin Nickel (S9041 SN RING), Silver Ring (S9041 SL RING)
- Constant current trailing edge dimmable LED driver, with flex and plug
- High efficiency SMD LED chips and quality opal polycarbonate diffuser



### Dimensions

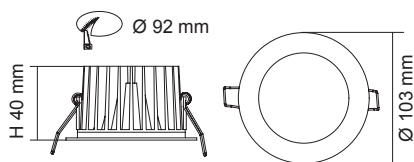


### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: 1-10V, DALI / DSI



### Photometric Data

Unit: cd C0/C180 — C30/C210  
cd C60/C240 — C90/C270

S9041 TC at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9041 TC WH	240/50	10	800/900/850	3000/4200/5700	> 80	90°	Yes	White
S9041 TC SN	240/50	10	800/900/850	3000/4200/5700	> 80	90°	Yes	Satin Nickel

For terms and conditions of catalogue data use, refer to INDEX



TC SELECTABLE

## ECOGEM S9041 SM - 10W

Surface mount dimmable LED downlight

### Application


Ideal for any surface mount, residential or commercial interior space design

### Design Specifications

- Precise pressed metal surface mount profile, IP20
- S9041 LED downlight kit included
- Stylish white powder coat finish
- Constant current trailing edge dimmable LED driver



### Dimensions



### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: 1-10V, DALI / DSI



### Photometric Data

Unit: cd C0/C180 — C30/C210  
cd C60/C240 — C90/C270

S9041SM/C at 4000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9041SM/C TC WH	240/50	10	800/900/850	3000/4200/5700	> 80	90°	Yes	White



TC SELECTABLE

## ECOGEM S9041 TC SQUARE - 10W

Dimmable IP44 LED downlight with selectable colour temperature

### Application


Ideal for any residential or commercial interior space

### Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, IC - 4 rated
- Durable die-cast aluminium square body profile
- Trim colour choice of White or Satin Nickel
- Constant current trailing edge dimmable LED driver, with flex and plug
- High efficiency SMD LED chips and quality opal polycarbonate diffuser



### Dimensions

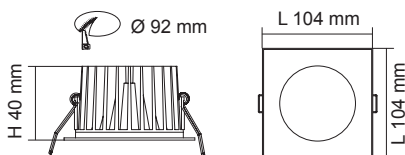


### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: 1-10V, DALI / DSI



### Photometric Data

Unit: cd C0/C180 C30/C210  
cd C60/C240 C90/C270

S9041 TC S at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9041 TC S WH	240/50	10	800/900/850	3000/4200/5700	> 80	90°	Yes	White
S9041 TC S SN	240/50	10	800/900/850	3000/4200/5700	> 80	90°	Yes	Satin Nickel

For terms and conditions of catalogue data use, refer to INDEX





## TC SELECTABLE COLOUR

WARM WHITE

**3000K**

800lm

COOL WHITE


**4200K**

900lm

DAYLIGHT

**5700K**

850lm

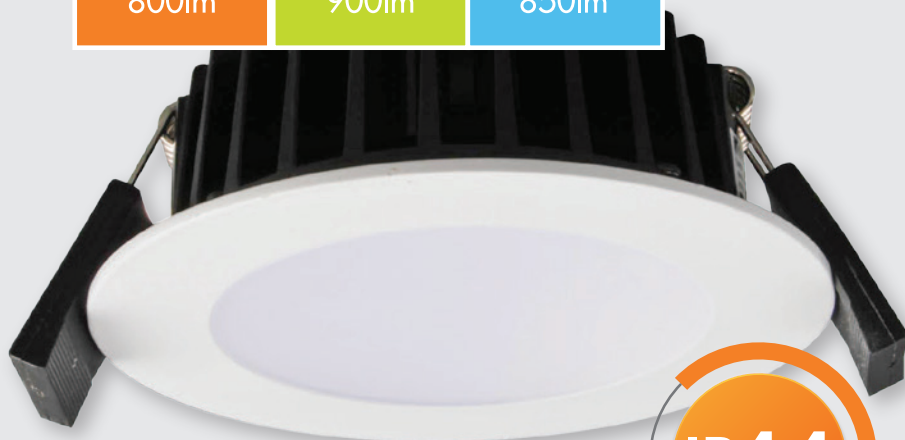

**IP44**

# THE ECOGEM LED DIMMABLE DOWNLIGHTS

**S9041 TC & S9041 TC S**

Designed with a circular cut-out and a stylish choice of round or square trims and selectable CCT, why would you consider anything else?



TC SELECTABLE


## ROBO S9085TC - 9W

9 watt dimmable downlight with TC control

### Application


Ideal for any residential or commercial interior space

### Design Specifications

- 9 watt integral constant current dimmable driver with selectable colour temperature
- A very versatile design supplied with flex and plug and the option to hard wire the unit via quick access 3.5mm terminal block
- CRI > 80, CCT selectable control 3000K, 4000K, 5700K, beam distribution 100°
- Trim colour white, optional satin deco ring (S9065SN/RING & S9065BK/RING)
- High efficiency SMD LED chips and quality polycarbonate diffuser
- IC - 4 rated, double insulation 



### Dimensions

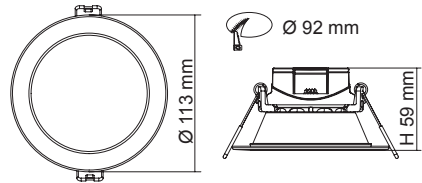

### Performance


Dimmable Driver - Yes

Dimmer Type - Trailing edge

### Photometric Data

Unit: cd C0/C180 — C90/C270

#### S9085TC at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9085TC/WH	240/50	9	750/900/850	3000/4000/5700	> 80	100°	Yes	White

For terms and conditions of catalogue data use, refer to INDEX



# THE NEW ROBO LED DIMMABLE DOWNLIGHT S9085TC

The new ROBO 9 watt LED downlight with selectable colour temperature and the convenience of flex & plug or hard wired termination – all too easy!



TC SELECTABLE


## TRI-GEM + S9842CS - 10W

Dimmable IP44 LED downlight with DIY selectable colour temperature

### Application


Ideal for any residential or commercial interior space

### Design Specifications

- Easy DIY selectable colour temperature with the flick of a switch, no need to access the fixture and fully compatible with the SAL PIXIE app functionality when connected to a SAL PIXIE dimmer
- Durable aluminium recessed mount body profile, white trim face, IP44 rated
- 10 watt integral control gear with smooth dimming functionality
- IC-4 rated with a robust opal polycarbonate diffuser
- Double insulation 



### Dimensions

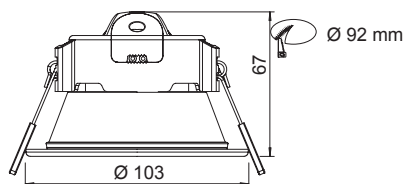

### Performance


Dimmable Driver - Yes

Dimmer Type - Trailing edge

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9842CS at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9842CS/WH	240/50	10	800/900/850	3000/4000/5700	> 80	90°	Yes	White

For terms and conditions of catalogue data use, refer to INDEX



TC SELECTABLE


## TRI-GEM MULTI S9842MCS - 10W

Dimmable IP44 LED downlight with DIY selectable colour temperature and integral DIP switch

### Application


Ideal for any residential or commercial interior space

### Design Specifications

- Easy DIY selectable colour temperature with the flick of a switch, no need to access the fixture and fully compatible with the SAL PIXIE app functionality when connected to a SAL PIXIE dimmer
- CCT can be selected manually or via PIXIE
- Durable aluminium recessed mount body profile, white trim face, IP44 rated
- 10 watt integral control gear with smooth dimming functionality
- IC-4 rated with a robust opal polycarbonate diffuser
- Double insulation 



### Dimensions

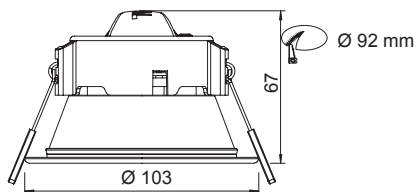

### Performance


Dimmable Driver - Yes

Dimmer Type - Trailing edge

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9842MCS at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9842MCS/WH	240/50	10	800/900/850	3000/4000/5700	> 80	90°	Yes	White

For terms and conditions of catalogue data use, refer to INDEX

Linked   YouTube





# COLOUR TEMPERATURE, THERE IS A DIFFERENCE



2700K



3000K



## TC SELECTABLE COLOUR

WARM WHITE  
**2700K**

COOL WHITE  
**4000K**

DAYLIGHT  
**6000K**



4000K



5000K



6000K

Lighting is more than just brightness or lumens. Make sure you take the time to select the right colour temperature to create the best visual appearance; your eyes don't tell lies!



TC SELECTABLE


## WAVE S9064TC - 7W

Dimmable IP44 LED downlight with selectable colour temperature

### Application


Ideal for any residential or commercial interior space

### Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Poly covered aluminium body, IC - 4 rated, double insulation 
- Quality opal polycarbonate diffuser
- Integral constant current trailing edge dimmable LED driver, with flex and plug
- High efficiency SMD LED chips
- Deco ring options - Satin Nickel (S9064SN/RING), Black (S9064BK/RING)



### Dimensions



### Performance


Dimmable Driver - Yes

Dimmer Type - Trailing edge

### Photometric Data

Unit: cd C0/C180 — C90/C270

S9064TC at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9064TC WH	240/50	7	550/600/600	3000/4000/5700	> 80	90°	Yes	White

For terms and conditions of catalogue data use, refer to INDEX



TC SELECTABLE


## WAVE S9065TC - 9W

Dimmable IP44 LED downlight with selectable colour temperature

### Application


Ideal for any residential or commercial interior space

### Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Poly covered aluminium body, IC - 4 rated, double insulation 
- Quality opal polycarbonate diffuser
- Integral constant current trailing edge dimmable LED driver, with flex and plug
- High efficiency SMD LED chips
- Deco ring options - Satin Nickel (S9065SN/RING), Black (S9065BK/RING)



### Dimensions

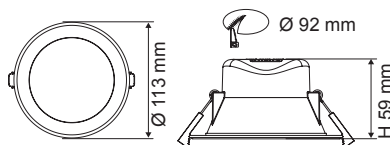

### Performance


Dimmable Driver - Yes

Dimmer Type - Trailing edge

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9065TC at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9065TC WH	240/50	9	750/850/850	3000/4000/5700	> 80	90°	Yes	White

For terms and conditions of catalogue data use, refer to INDEX

Linked   YouTube











TC SELECTABLE


## WAVE S9066TC - 12W

Dimmable IP44 LED downlight with selectable colour temperature

### Application


Ideal for any residential or commercial interior space

### Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Poly covered aluminium body, IC - 4 rated, double insulation 
- Quality opal polycarbonate diffuser
- Integral constant current trailing edge dimmable LED driver, with flex and plug
- High efficiency SMD LED chips
- Deco ring options - Satin Nickel (S9066SN/RING)



### Dimensions



### Performance


Dimmable Driver - Yes

Dimmer Type - Trailing edge

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9066TC at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9066TC WH	240/50	12	1200/1350/1350	3000/4000/5700	> 80	90°	Yes	White



# SAL **PIXIE** AN AFFORDABLE CHOICE FOR HOME LIGHTING AUTOMATION



PIXIE



## COOLUM PLUS S9067 - 6W

6 watt dimmable downlight, UGR<19,  
with flex and plug termination

### Application


Ideal for any residential or  
commercial interior space

### Design Specifications

- 6 watt integral constant current dimmable driver
- A very versatile design supplied with flex and plug fitted for easy installation
- High efficiency SMD LED chips, multi-faceted optical system
- CRI > 80, CCT 3000, 60° beam distribution, UGR<19
- Polyamide trim and body form in white or black
- IC - 4 rated



### Dimensions

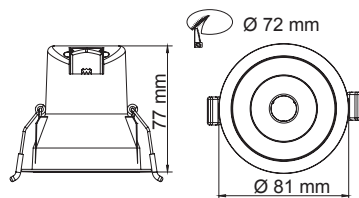

### Performance



Dimmable Driver - Yes

Dimmer Type - Trailing edge

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

**S9067WW at 3000K**



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9067WW/WH	240/50	6	470	3000	> 80	60°	Yes	White
S9067WW/BK	240/50	6	400	3000	> 80	60°	Yes	Black

For terms and conditions of catalogue data use, refer to INDEX



## COOLUM PLUS S9068 - 9W

9 watt dimmable downlight, UGR<19,  
with flex and plug termination

### Application

Ideal for any residential or  
commercial interior space

### Design Specifications


- 9 watt integral constant current dimmable driver
- A very versatile design supplied with flex and plug fitted for easy installation
- High efficiency SMD LED chips, multi-faceted optical system
- CRI > 80, CCT 3000, 60° beam distribution, UGR<19
- Polyamide trim and body form in white or black
- IC - 4 rated

### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge



### Dimensions

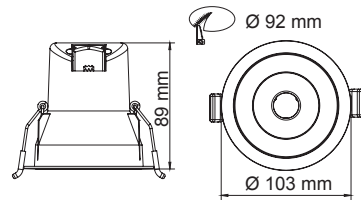

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

**S9068WW at 3000K**



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9068WW/WH	240/50	9	640	3000	> 80	60°	Yes	White
S9068WW/BK	240/50	9	500	3000	> 80	60°	Yes	Black



## ECOSTAR S9045 - 9W

Dimmable 9 watt LED downlight

### Application


Ideal for any residential or commercial interior space

### Design Specifications

- Durable die-cast aluminium body profile
- Stylish powder coat finish, white or plated satin nickel finish
- High output COB LED chip
- Changeable multi-reflector system, 60° standard beam, 40° optional
- Constant current trailing edge dimmable LED driver, with flex and plug
- IC - 4 classification



### Dimensions

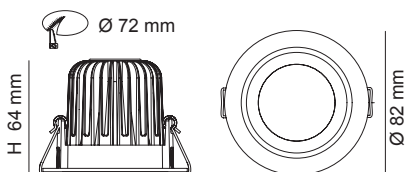


### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: 1-10V, DALI / DSI



### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9045 WW at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9045 WW WH	240/50	9	700	3000	> 80	60°	Yes	White
S9045 DL WH	240/50	9	800	6000	> 80	60°	Yes	White
S9045 WW SN	240/50	9	700	3000	> 80	60°	Yes	Satin Nickel
S9045 DL SN	240/50	9	800	6000	> 80	60°	Yes	Satin Nickel

For terms and conditions of catalogue data use, refer to INDEX









## ECOSTAR S9046 - 9W

Dimmable 9 watt gimbal LED downlight

### Application


Ideal for any residential or commercial interior space

### Design Specifications

- Durable die-cast aluminium body profile
- Stylish powder coat finish, white or plated satin nickel finish
- Versatile gimbal head with 30° tilt, IC - 4 rated
- High output COB LED chip, CRI > 80  
3000K or 6000K
- Changeable multi-reflector system, 60° standard beam, 40° optional
- Constant current trailing edge dimmable LED driver with flex and plug



### Dimensions

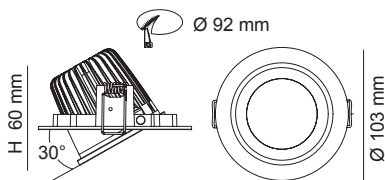


### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: 1-10V, DALI / DSI



### Photometric Data

Unit: cd C0/C180 — C90/C270

S9046 WW at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9046 WW WH	240/50	9	800	3000	> 80	60°	Yes	White
S9046 DL WH	240/50	9	850	6000	> 80	60°	Yes	White
S9046 WW SN	240/50	9	800	3000	> 80	60°	Yes	Satin Nickel
S9046 DL SN	240/50	9	850	6000	> 80	60°	Yes	Satin Nickel

For terms and conditions of catalogue data use, refer to INDEX



## ECOSTAR S9046 SM - 9W

Surface mount dimmable 9 watt LED downlight

### Application


Ideal for any surface mount, residential or commercial interior space design

### Design Specifications

- Precise, pressed metal surface mount profile
- Stylish white powder coat finish
- S9046 LED downlight kit included
- Integral constant current trailing edge dimmable LED driver
- 60° standard beam, 40° optional



### Dimensions



### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: 1-10V, DALI / DSI



### Photometric Data

Unit: cd C0/C180 — C90/C270

S9046SM/C WW at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9046SM/C WW WH	240/50	9	800	3000	> 80	60°	Yes	White
S9046SM/C DL WH	240/50	9	850	6000	> 80	60°	Yes	White



## ECOSTAR S9048 - 12W

Dimmable IP44, 12 watt LED downlight

### Application


Ideal for any residential or commercial interior space

### Design Specifications

- Durable die-cast aluminium body profile
- Stylish powder coat or plated finish
- High output COB LED chip
- Multi-reflector system, 55° beam distribution
- Constant current trailing edge dimmable LED driver, with flex and plug
- IC - 4 classification



### Dimensions

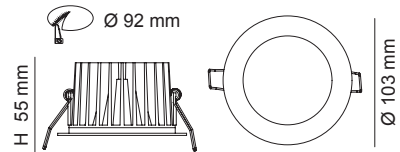


### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: 1-10V, DALI / DSI



### Photometric Data

Unit: cd C0/C180 — C90/C270

S9048 WW at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9048 WW WH	240/50	12	750	3000	> 80	55°	Yes	White
S9048 DL WH	240/50	12	800	5000	> 80	55°	Yes	White
S9048 WW SN	240/50	12	750	3000	> 80	55°	Yes	Satin Nickel
S9048 DL SN	240/50	12	800	5000	> 80	55°	Yes	Satin Nickel

For terms and conditions of catalogue data use, refer to INDEX



## ECOSTAR S9048 SM - 12W

Surface mount dimmable 12 watt LED downlight

### Application


Ideal for any surface mount, residential or commercial interior space design

### Design Specifications

- Precise, pressed metal surface mount profile
- Stylish white powder coat finish
- S9048 LED downlight kit included
- Constant current trailing edge dimmable LED driver, with flex and plug
- 55° beam distribution



### Dimensions



### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: 1-10V, DALI / DSI



### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9048SM/C DL at 5000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9048SM/C WW WH	240/50	12	750	3000	> 80	55°	Yes	White
S9048SM/C DL WH	240/50	12	800	5000	> 80	55°	Yes	White



## STAR SPOT S9361 - 4W

Compact design LED 4 watt downlight

### Application

Ideal for any residential feature lighting or commercial interior space

### Design Specifications


- 42mm diameter trim face, low profile design, 35mm cut-out
- Available in Satin Nickel or White finish
- Durable aluminium body profile
- CCT 4000K, 250 lumens
- High output COB LED chip design, 40° beam distribution
- Available with non-dimmable (4 watt system) remote driver with flex and plug or 12V DC head assembly only

### Performance

Dimmable Driver - No




### Dimensions

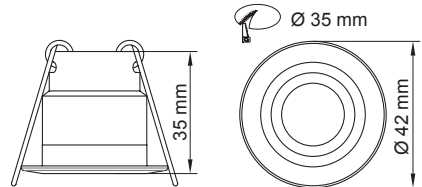

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9361CW at 4000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9361CW/SN	240/50	4	250	4000	> 80	40°	No	Satin Nickel
S9361CW/WH	240/50	4	250	4000	> 80	40°	No	White
S9361CW/SN/ND	12V DC	3	250	4000	> 80	40°	No	Satin Nickel
S9361CW/WH/ND	12V DC	3	250	4000	> 80	40°	No	White

For terms and conditions of catalogue data use, refer to INDEX





# THE STAR SPOT S9361 LED DOWNLIGHT

Compact design LED downlight with 42mm diameter trim face, low profile design, 35mm cut-out. Available in satin nickel or white finish, why would you consider anything else?



## UNIFIT S9053 - 9W

Dimmable 9 watt LED module

### Application


Ideal for any residential or commercial interior space

### Design Specifications

- Efficient die-cast aluminium heat sink
- High output COB LED chip
- Changeable multi-reflector system, 60° standard beam, 25° and 40° optional
- Polycarbonate optical lens
- Remote constant current trailing edge dimmable LED driver, fitted with flex and plug for plug and play



### Dimensions

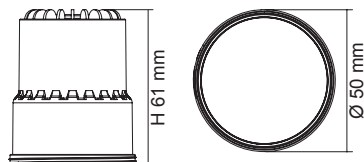

### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: 1-10V, DALI / DSI



### Photometric Data

Unit: cd C0/C180 — C90/C270

#### S9053 WP at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable
S9053 WP	240/50	9	700	3000	> 80	60°	Yes
S9053 CP	240/50	9	800	4000	> 80	60°	Yes
S9053 DP	240/50	9	800	6000	> 80	60°	Yes


For terms and conditions of catalogue data use, refer to INDEX




## Dedicated heads




S9006



S9007



S9008



S9009




S9010




## Suitable standard heads



S9001



S9003



S9902F/120



## Accessories




S9053HC/P

S9053DF/P

S9053BF/P

## Expanded view



S9053



S9053R25/P (25° Reflector)



S9053R40/P (40° Reflector)



S9053HC/P Honey Comb



S9053DF/P Centre Frost Diffuser



S9053BF/P Buffer



## UNIFIT S9053HC - 8W

Dimmable 8 watt LED module, CRI >90

### Application


Ideal for any residential or commercial interior space

### Design Specifications

- Efficient die-cast aluminium heat sink
- High output COB LED chip, CRI >90
- Changeable multi-reflector system, 60° standard beam, 25° and 40° optional
- Polycarbonate optical lens
- Remote constant current trailing edge dimmable LED driver, fitted with flex and plug for plug and play



### Dimensions

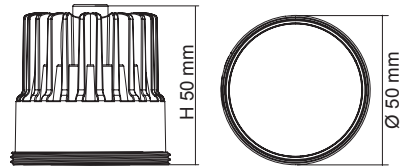

### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: 1-10V, DALI / DSI



### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9053HC/WP at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable
S9053HC/WP	240/50	8	620	3000	> 90	60°	Yes



## Dedicated heads



S9006



S9007



S9008



S9009



S9010



## Suitable standard heads



S9001



S9003



S9902F/120



## Accessories




S9053HC/P

S9053DF/P

S9053BF/P

## Expanded view



S9053HC/WP



S9053R25/P (25° Reflector)



S9053R40/P (40° Reflector)



S9053HC/P Honey Comb



S9053DF/P Centre Frost Diffuser



S9053BF/P Buffer





## ECOSTAR II FIXED S9145 - 9W

Dimmable fixed 9 watt LED downlight

### Application


Ideal for any residential or commercial interior space

### Design Specifications

- Durable die-cast aluminium body profile
- Stylish white powder coat finish
- High output COB LED chip
- Changeable multi-reflector system, 60° standard beam, 25° and 40° optional
- Polycarbonate optical lens
- Remote constant current trailing edge dimmable LED driver, with flex and plug



### Dimensions

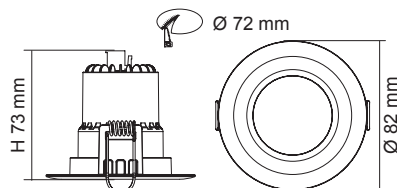

### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: 1-10V, DALI / DSI




### Photometric Data

Unit: cd C0/C180 — C90/C270

S9145WW at 3000K



S9145CW at 4000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9145WW/WH	240/50	9	700	3000	> 80	60°	Yes	White
S9145CW/WH	240/50	9	800	4000	> 80	60°	Yes	White
S9145DL/WH	240/50	9	800	6000	> 80	60°	Yes	White

For terms and conditions of catalogue data use, refer to INDEX



## ECOSTAR II GIMBAL S9146 - 9W

Dimmable gimbal 9 watt LED downlight

### Application


Ideal for any residential or commercial interior space

### Design Specifications

- Durable die-cast aluminium body profile 45° gimbal
- Stylish white powder coat finish
- High output COB LED chip
- Changeable multi-reflector system, 60° standard beam, 25° and 40° optional
- Polycarbonate optical lens
- Remote constant current trailing edge dimmable LED driver, with flex and plug



### Dimensions

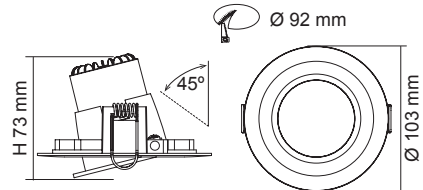

### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: 1-10V, DALI / DSI




### Photometric Data

Unit: cd C0/C180 — C90/C270

S9146WW at 3000K



S9146DL at 6000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9146WW/WH	240/50	9	700	3000	> 80	60°	Yes	White
S9146CW/WH	240/50	9	800	4000	> 80	60°	Yes	White
S9146DL/WH	240/50	9	800	6000	> 80	60°	Yes	White

For terms and conditions of catalogue data use, refer to INDEX

Linked in YouTube





## UNIFIT S9006 - 9W

Dimmable fixed 9 watt LED downlight

### Application


Ideal for any residential or commercial interior space

### Design Specifications

- Durable die-cast aluminium body profile
- Stylish white powder coat finish
- High output COB LED chip
- Changeable multi-reflector system, 60° standard beam, 25° and 40° optional
- Polycarbonate optical lens
- Remote constant current trailing edge dimmable LED driver



### Dimensions

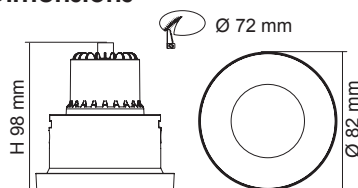

### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: 1-10V, DALI / DSI



### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9006WW at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9006WW	240/50	9	700	3000	> 80	60°	Yes	Matt White
S9006CW	240/50	9	800	4000	> 80	60°	Yes	Matt White
S9006DL	240/50	9	800	6000	> 80	60°	Yes	Matt White
S9006HC/WW	240/50	8	620	3000	> 90	60°	Yes	Matt White

For terms and conditions of catalogue data use, refer to INDEX



## UNIFIT S9007 - 9W

Dimmable fixed 9 watt LED downlight

### Application


Ideal for any residential or commercial interior space

### Design Specifications

- Durable die-cast aluminium body profile
- Stylish white powder coat finish
- High output COB LED chip
- Changeable multi-reflector system, 60° standard beam, 25° and 40° optional
- Polycarbonate optical lens
- Remote constant current trailing edge dimmable LED driver



### Dimensions

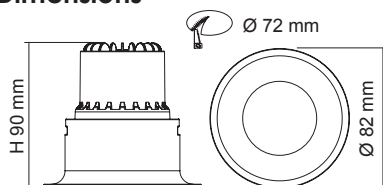

### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: 1-10V, DALI / DSI



### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9007WW at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9007WW	240/50	9	700	3000	> 80	60°	Yes	Matt White
S9007CW	240/50	9	800	4000	> 80	60°	Yes	Matt White
S9007DL	240/50	9	800	6000	> 80	60°	Yes	Matt White
S9007HC/WW	240/50	8	620	3000	> 90	60°	Yes	Matt White

For terms and conditions of catalogue data use, refer to INDEX



## UNIFIT S9008 - 9W

Dimmable fixed 9 watt LED downlight

### Application


Ideal for any residential or commercial interior space

### Design Specifications

- Durable die-cast aluminium body profile
- Stylish white powder coat finish
- High output COB LED chip
- Changeable multi-reflector system, 60° standard beam, 25° and 40° optional
- Polycarbonate optical lens
- Remote constant current trailing edge dimmable LED driver



### Dimensions

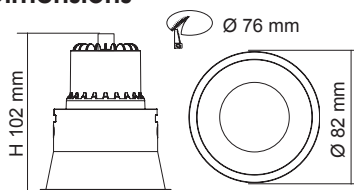

### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: 1-10V, DALI / DSI



### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9008WW at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9008WW	240/50	9	700	3000	> 80	60°	Yes	Matt White
S9008CW	240/50	9	800	4000	> 80	60°	Yes	Matt White
S9008DL	240/50	9	800	6000	> 80	60°	Yes	Matt White
S9008HC/WW	240/50	8	620	3000	> 90	60°	Yes	Matt White

For terms and conditions of catalogue data use, refer to INDEX





## UNIFIT S9009 - 9W

Centre tilt 30° dimmable 9 watt LED downlight

### Application


Ideal for any residential or commercial interior space

### Design Specifications

- Durable die-cast aluminium body profile
- Stylish white powder coat finish
- High output COB LED chip
- Changeable multi-reflector system, 60° standard beam, 25° and 40° optional
- Polycarbonate optical lens
- Remote constant current trailing edge dimmable LED driver



### Dimensions

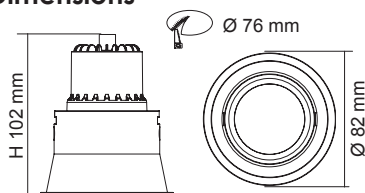

### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: 1-10V, DALI / DSI



### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9009WW at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9009WW	240/50	9	700	3000	> 80	60°	Yes	Matt White
S9009CW	240/50	9	800	4000	> 80	60°	Yes	Matt White
S9009DL	240/50	9	800	6000	> 80	60°	Yes	Matt White
S9009HC/WW	240/50	8	620	3000	> 90	60°	Yes	Matt White

For terms and conditions of catalogue data use, refer to INDEX



## DECOFIT S9010 - 9W

Fixed dimmable 9 watt LED downlight

### Application


Ideal for any residential or commercial interior space

### Design Specifications

- Die-cast aluminium body profile, in matter white finish
- High output COB LED optical system, polycarbonate lens
- Remote constant current trailing edge dimmable driver included, complete with flex and plug
- 60° standard beam, 25° and 40° optional
- Colour deco rings supplied as standard



### Dimensions

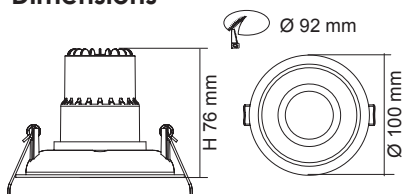

### Performance

Dimmable Driver - Yes


Dimmer Type - Trailing edge

Option: 1-10V, DALI / DSI

### Photometric Data

Unit: cd C0/C180 — C90/C270

S9010WW at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9010WW	240/50	9	700	3000	> 80	60°	Yes	Matt White
S9010CW	240/50	9	800	4000	> 80	60°	Yes	Matt White
S9010DL	240/50	9	800	6000	> 80	60°	Yes	Matt White

For terms and conditions of catalogue data use, refer to INDEX



## FIREFOX S9902F-S9053 - 9W

Fire rated 9 watt dimmable LED downlight, compliant to AS/NZS1530.4

### Application


In the event of ceiling fire, the rise in temperature causes the insulation in the can to expand and thus closes the fitting ventilation holes, preventing the spread of fire between ceiling void and room

### Design Specifications

- Steel canister with anti-fire insulation
- Robust construction, white powder coat finish
- Fire rated: 120 mins
- Compliant with Australian standard AS1530.4
- S9053 LED module fitted, 60° standard beam, 25° and 40° optional
- Constant current trailing edge dimmable LED driver



### Dimensions

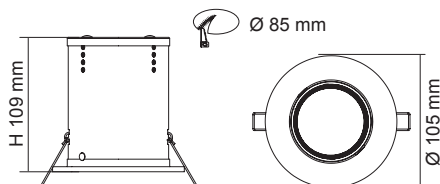

### Performance

Dimmable Driver - Yes


Dimmer Type - Trailing edge

Option: 1-10V, DALI / DSI

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9902F-S9053 WP at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9902F/120-S9053 WP	240/50	9	700	3000	> 80	60°	Yes	White
S9902F/120-S9053 CP	240/50	9	800	4000	> 80	60°	Yes	White
S9902F/120-S9053 DP	240/50	9	800	6000	> 80	60°	Yes	White



## LED SURFACE SPOT SMT9017 - 9W

Unitrek, architectural surface mount profile

### Application


Retail or residential interior spaces for feature effects

### Design Specifications

- Aluminium body profile, colour white or optional black
- High performance COB LED chip
- Changeable multi-reflector system, Beam distribution standard 60°, 25° or 40° optional
- Polycarbonate optical lens
- Integral constant current trailing edge dimmable LED driver



### Dimensions

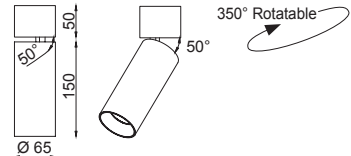


### Performance

Dimmable Driver - Yes  
Dimmer Type - Trailing edge

### Photometric Data

Unit: cd C0/C180 — C90/C270

SMT9017WW at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimmable	Dimension (D x H mm)
SMT9017WW/WH	240/50	9	700	3000	> 80	60°	White	Yes	65 x 150
SMT9017CW/WH	240/50	9	800	4000	> 80	60°	White	Yes	65 x 150
SMT9017DL/WH	240/50	9	800	6000	> 80	60°	White	Yes	65 x 150
SMT9017WW/BK	240/50	9	700	3000	> 80	60°	Black	Yes	65 x 150
SMT9017CW/BK	240/50	9	800	4000	> 80	60°	Black	Yes	65 x 150
SMT9017DL/BK	240/50	9	800	6000	> 80	60°	Black	Yes	65 x 150

For terms and conditions of catalogue data use, refer to INDEX



## UNITREK SRC9017 - 9W

Unitrek, architectural recessed mount profile

### Application


Designed for decorative and functional retail applications

### Design Specifications

- Aluminium body profile
- High efficiency COB LED chip
- Changeable multi-reflector system, Beam distribution standard 60°, 25° or 40° optional
- Polycarbonate optical lens
- Integral constant current trailing edge dimmable LED driver




### Dimensions

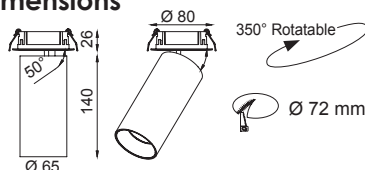

### Photometric Data

Unit: cd C0/C180 — C90/C270

SRC9017WW at 3000K



### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimmable	Dimension (D x H mm)
SRC9017WW/WH	240/50	9	700	3000	> 80	60°	White	Yes	65 x 140
SRC9017CW/WH	240/50	9	800	4000	> 80	60°	White	Yes	65 x 140
SRC9017DL/WH	240/50	9	800	6000	> 80	60°	White	Yes	65 x 140
SRC9017WW/BK	240/50	9	700	3000	> 80	60°	Black	Yes	65 x 140
SRC9017CW/BK	240/50	9	800	4000	> 80	60°	Black	Yes	65 x 140
SRC9017DL/BK	240/50	9	800	6000	> 80	60°	Black	Yes	65 x 140





## DOWNLIGHT FITTINGS S9001, S9003

Low voltage LED  
downlight kit (Round)



**Select your downlight  
in three easy steps**

### Step 1 - Select your downlight head profile

#### Technical Specifications

Model No.	Head	Fitting Colour	Cut Out (Ø)	Dimensions (Ø)
S9001BK	Fixed head, twist lock	Black	72mm	81mm
S9001WH	Fixed head, twist lock	White	72mm	81mm
S9001SC	Fixed head, twist lock	Satin Chrome	72mm	81mm
S9003BK	Gimbal 45°, twist lock	Black	92mm	103mm
S9003WH	Gimbal 45°, twist lock	White	92mm	103mm
S9003SC	Gimbal 45°, twist lock	Satin Chrome	92mm	103mm

### Step 2 - Select your driver type

#### Electronic transformers (please select one for MR16 lamps)

Model No.	Input (V)/(Hz)	Power (W)	Output (V)	Power Factor	Dimensions (L x W x H mm)	1.2 m flex & 2 pin plug fitted
MINI60	240/50	20-60	11.5	0.99	109 x 42 x 24	No
MINI/P60	240/50	20-60	11.5	0.99	109 x 42 x 24	Yes



### Step 3 - Select your lamp type and you are ready to go!



**MR16 5W**



**MR16/7W**



**MR16DIM9W**



**S9053**



**S9053HC**

### Low voltage LED globes (please select one)

Model No.	Input (V AC/DC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base	Dimensions (D x H mm)
MR16 5W WW	12	5	330	3000	> 80	38°	No	GU5.3	50 x 49
MR16 5W DL	12	5	350	6000	> 80	38°	No	GU5.3	50 x 49
MR16/7W/WW	12	7	500	3000	> 80	60°	No	GU5.3	50 x 49
MR16/7W/DL	12	7	550	6000	> 80	60°	No	GU5.3	50 x 49
MR16DIM9W/WW	12	9	500	3000	> 80	60°	Yes	GU5.3	50 x 49
MR16DIM9W/DL	12	9	550	6000	> 80	60°	Yes	GU5.3	50 x 49

**OR**

### Dimmable LED modules (please select one)

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT	CRI	Beam Angle	Dimmable
S9053 WP	240/50	9	700	3000	> 80	60°	Yes
S9053 CP	240/50	9	800	4000	> 80	60°	Yes
S9053 DP	240/50	9	800	6000	> 80	60°	Yes
S9053HC/WP	240/50	8	620	3000	> 90	60°	Yes



TC SELECTABLE

DUAL POWER

## ALBANY S9514TC - 28W/36W


Recessed LED rectangular Shop Light with selectable colour and power

### Application


Ideal for any retail or commercial interior space

### Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch
- Twin 28W/36W setting with the integral DIP switch
- Adjustable up to 60°, IC - 4 rated
- Constant current non-dimmable LED driver, complete with flex and plug
- Stylish white or silver powder coat finish
- High efficiency SMD LED chips

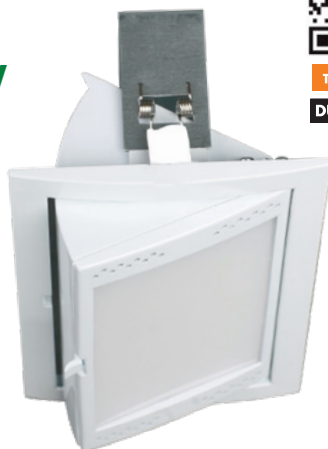

### Dimensions

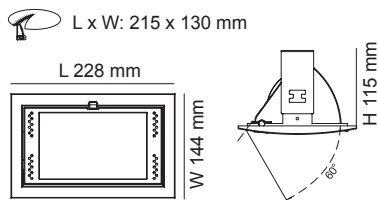

### Performance


Dimmable Driver - Optional

Dimmer Type - Trailing edge, 1-10V, DALI / DSI

### Photometric Data

Unit: cd C0/C180 — C90/C270

S9514TC at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9514TC WH	240/50	28/36	2800/3600	3000/4000/5500	> 80	100°	Optional	White
S9514TC SL	240/50	28/36	2800/3600	3000/4000/5500	> 80	100°	Optional	Silver

For terms and conditions of catalogue data use, refer to INDEX



TC SELECTABLE

DUAL POWER

## EXMOUTH S9522TC - 15W/22W

Recessed 15/22 watt circular LED Shop light with selectable colour and power

### Application


Ideal for any retail or commercial interior space

### Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch
- Twin 15W/22W setting with the integral DIP switch, IC - 4 rated
- Durable die-cast aluminium body profile
- Constant current non-dimmable LED driver, with flex and plug
- Stylish powder coat finish with an opal polycarbonate diffuser
- High efficiency SMD LED chips



### Dimensions

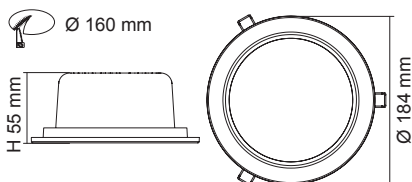

### Performance


Dimmable Driver - Optional

Dimmer Type - Trailing edge, 1-10V, DALI / DSI

### Photometric Data

Unit: cd C0/C180 — C90/C270

S9522TC at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9522TC WH	240/50	15/22	1500/2100	3000/4000/5500	> 80	100°	Optional	White
S9522TC SL	240/50	15/22	1500/2100	3000/4000/5500	> 80	100°	Optional	Silver

For terms and conditions of catalogue data use, refer to INDEX

Linked in YouTube





TC SELECTABLE

DUAL POWER

## EXMOUTH S9523TC - 28W/40W

Recessed 28/40 watt circular LED Shop light with selectable colour and power

### Application


Ideal for any retail or commercial interior space

### Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch
- Twin 28W/40W setting with the integral DIP switch, IC - 4 rated
- Durable die-cast aluminium body profile, with white or silver trim
- Constant current non-dimmable LED driver, with flex and plug
- Stylish powder coat finish with an Opal polycarbonate diffuser
- High efficiency SMD LED chips



### Dimensions

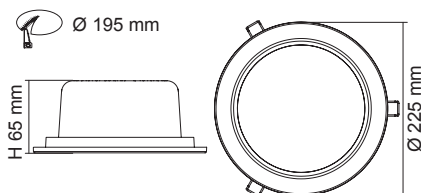

### Performance



Dimmable Driver - Optional

Dimmer Type - Trailing edge, 1-10V, DALI / DSI

### Photometric Data

Unit: cd C0/C180 — C90/C270

S9523TC at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9523TC WH	240/50	28/40	2800/3800	3000/4000/5500	> 80	105°	Optional	White
S9523TC SL	240/50	28/40	2800/3800	3000/4000/5500	> 80	105°	Optional	Silver

For terms and conditions of catalogue data use, refer to INDEX





## EXMOUTH S9523 SM - 28W/40W

Surface mount 28/40 watt LED Shop light  
with selectable colour and power

### Application


Ideal for any surface mount, retail  
or commercial interior space

### Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch
- Twin 28/40 watt setting with the integral DIP switch
- Precise, pressed metal surface mount profile
- Stylish white powder coat finish
- S9523 LED downlight kit included



### Dimensions



### Performance


Dimmable Driver - Optional  
Dimmer Type - Trailing edge, 1-10V, DALI / DSI



### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9523SM/C TC at 5500K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9523SM/C TC WH	240/50	28/40	2800/3800	3000/4000/5500	> 80	105°	Optional	White

For terms and conditions of catalogue data use, refer to INDEX

Linked YouTube





INTERIOR LIGHTING

# SMARTER LIGHTING CHOICES





TC SELECTABLE

## PREMIER S9071TC - 10W

Dimmable IP64, 10W LED downlight  
with selectable colour temperature

### Application


Ideal for any retail or  
commercial interior space

### Design Specifications

- Premium aluminium body profile,  
IC - 4 rated
- Stylish white or silver powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- Remote constant current trailing edge  
dimmable LED driver, with flex and plug



### Dimensions

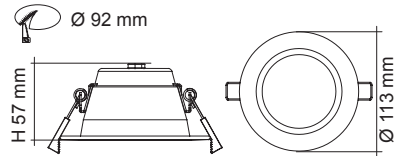


### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: DALI / DSI



### Photometric Data

Unit: cd C0/C180 — C90/C270

S9071TC at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9071TC WH	240/50	10	800/900/900	3000/4000/5700	> 80	90°	Yes	White
S9071TC SL	240/50	10	800/900/900	3000/4000/5700	> 80	90°	Yes	Silver





TC SELECTABLE

## PREMIER S9072TC - 14W

Dimmable IP64, 14W LED downlight  
with selectable colour temperature

### Application


Ideal for any retail or  
commercial interior space

### Design Specifications

- Premium aluminium body profile,  
IC - 4 rated
- Stylish white or silver powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- Remote constant current trailing edge  
dimmable LED driver, with flex and plug



### Dimensions

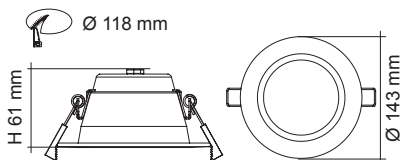


### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: 1-10V, DALI / DSI



### Photometric Data

Unit: cd C0/C180 — C90/C270

S9072TC at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9072TC WH	240/50	14	1000/1150/1150	3000/4000/5700	> 80	90°	Yes	White
S9072TC SL	240/50	14	1000/1150/1150	3000/4000/5700	> 80	90°	Yes	Silver





TC SELECTABLE

DUAL POWER

## PREMIER S9073TC DP - 13W/18W

Dimmable IP64, 18W LED downlight with selectable colour temperature and power

### Application


Ideal for any retail or commercial interior space

### Design Specifications

- Premium aluminium body profile, CA90 rated
- Stylish white or silver powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- Remote constant current trailing edge dimmable LED driver, with flex and plug



### Dimensions

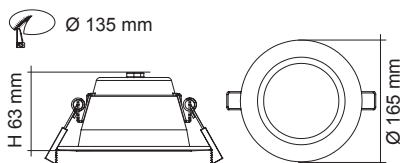

### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: 1-10V, DALI / DSI



### Photometric Data

Unit: cd C0/C180 — C90/C270

S9073TC/WH/DP at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9073TC SL	240/50	18	1400/1550/1550	3000/4000/5700	> 80	90°	Yes	Silver
S9073TC/WH/DP	240/50	13 18	1100/1300/1100 1500/1800/1600	3000/4000/5700	> 80	90°	Yes	White

For terms and conditions of catalogue data use, refer to INDEX



TC SELECTABLE

DUAL POWER

## PREMIER S9074TC DP/HP - 10W/20W

IP64, 20W LED downlight with selectable colour temperature and power

### Application


Ideal for any retail or commercial interior space

### Design Specifications

- Premium aluminium body profile, CA90 rated
- Stylish white powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- S9074DP Constant current non-dimmable LED driver, with flex and plug
- S9074HP trailing edge dimmable driver



### Dimensions

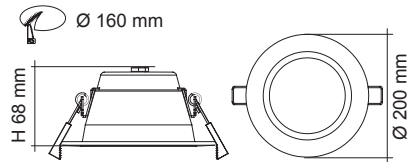

### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: 1-10V, DALI / DSI



### Photometric Data

Unit: cd C0/C180 — C90/C270

S9074TC/WH/DP at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9074TC/WH/HP	240/50	10	1000/1100/1000	3000/4000/5700	> 80	90°	Yes	White
S9074TC/WH/DP	240/50	15 20	1200/1400/1300 1600/1900/1700	3000/4000/5700	> 80	90°	Optional	White



TC SELECTABLE

DUAL POWER

## PREMIER S9075TC DP/HP - 30W

IP64, 30W LED downlight with selectable colour temperature and power

### Application


Ideal for any retail or commercial interior space

### Design Specifications

- Premium aluminium body profile, CA90 rated
- Stylish white powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- S9075DP Constant current non-dimmable LED driver, with flex and plug
- S9075HP trailing edge dimmable driver



### Dimensions

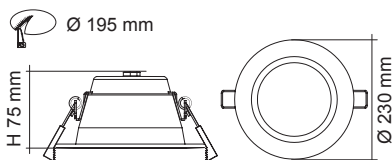

### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge


Option: 1-10V, DALI / DSI



### Photometric Data

Unit: cd C0/C180 — C90/C270

S9075TC/WH/DP at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9075TC/WH/HP	240/50	12	1300/1400/1400	3000/4000/5700	> 80	90°	Yes	White
S9075TC/WH/DP	240/50	23/30	2000/2300/2100/2600/3100/2800	3000/4000/5700	> 80	90°	Optional	White

For terms and conditions of catalogue data use, refer to INDEX



TC SELECTABLE

DUAL POWER

## PREMIER S9076TC DP/HP - 40W

Non-dimmable IP64, 40W LED downlight with selectable colour temperature and power

### Application

Ideal for any retail or commercial interior space

### Design Specifications


- Premium aluminium body profile, CA90 rated
- Stylish white powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- Constant current non-dimmable LED driver, with flex and plug

### Performance

Dimmable Driver - Optional  
Dimmer Type - Dual power, 1-10V, DALI / DSI  
- Half power, trailing edge, 1-10V, DALI / DSI




### Dimensions

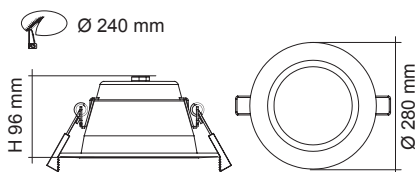

### Photometric Data

Unit: cd C0/C180 — C90/C270

S9076TC/WH/DP at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9076TC/WH/HP	240/50	18	2100/2300/2200	3000/4000/5700	> 80	90°	Optional	White
S9076TC/WH/DP	240/50	30/40	2600/3100/2800/3500/4200/3800	3000/4000/5700	> 80	90°	Optional	White

For terms and conditions of catalogue data use, refer to INDEX

Linked in YouTube





## UNI LED S9656 - 25W

Round profile IP54 LED downlights

### Application

Ideal for commercial interior spaces such as foyers and office areas

### Design Specifications

- Durable die-cast aluminium body profile with a round trim profile
- Stylish white or black powder coat finish
- High output COB LED chip
- Multi-faceted reflector system
- Remote constant current LED driver for easy installation, with flex and plug
- Optional dropped glass accessory


### Performance

Dimmable Driver - Optional

Dimmer Type - Trailing edge, 1-10V, DALI / DSI




### Dimensions

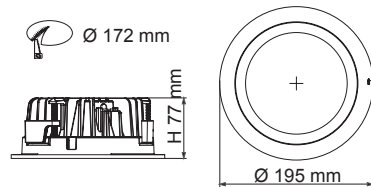

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

**S9656WW at 3000K**



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9656WW WH	240/50	25	2200	3000	> 80	90°	Optional	White
S9656WW BK	240/50	25	2200	3000	> 80	90°	Optional	Black
S9656WW WH RG	240/50	25	2200	3000	> 80	90°	Optional	White
S9656CW WH	240/50	25	2300	4000	> 80	90°	Optional	White
S9656CW BK	240/50	25	2300	4000	> 80	90°	Optional	Black
S9656CW WH RG	240/50	25	2300	4000	> 80	90°	Optional	White

For terms and conditions of catalogue data use, refer to INDEX





## UNI LED S9658 - 50W

Round profile IP54 LED downlights

### Application

Ideal for commercial interior spaces such as foyers and office areas

### Design Specifications

- Durable die-cast aluminium body profile with a round trim profile
- Stylish white or black powder coat finish
- High output COB LED chip
- Multi-faceted reflector system
- Remote constant current LED driver for easy installation, with flex and plug
- Optional dropped glass accessory


### Performance

Dimmable Driver - Optional

Dimmer Type - Trailing edge, 1-10V, DALI / DSI




### Dimensions

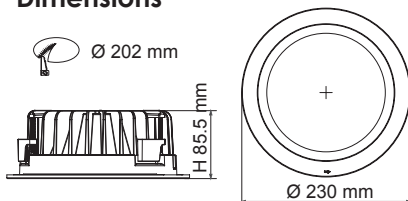

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

**S9658WW at 3000K**



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9658WW WH	240/50	50	4000	3000	> 80	90°	Optional	White
S9658WW BK	240/50	50	4000	3000	> 80	90°	Optional	Black
S9658WW WH RG	240/50	50	4000	3000	> 80	90°	Optional	White
S9658CW WH	240/50	50	4200	4000	> 80	90°	Optional	White
S9658CW BK	240/50	50	4200	4000	> 80	90°	Optional	Black
S9658CW WH RG	240/50	50	4200	4000	> 80	90°	Optional	White

For terms and conditions of catalogue data use, refer to INDEX



## UNI LED S9656 SQ - 25W

Square profile IP54 LED downlights

### Application

Ideal for commercial interior spaces such as foyers and office areas

### Design Specifications

- Durable die-cast aluminium body profile with a square trim profile
- Stylish white or black powder coat finish
- High output COB LED chip
- Multi-faceted reflector system
- Remote constant current LED driver for easy installation, with flex and plug
- Optional dropped glass accessory


### Performance

Dimmable Driver - Optional

Dimmer Type - Trailing edge, 1-10V, DALI / DSI




### Dimensions

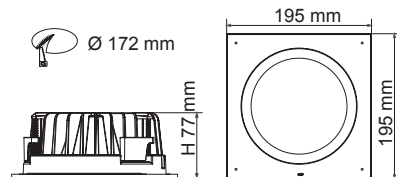

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

**S9656WW SQ at 3000K**



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9656WW WH SQ	240/50	25	2200	3000	> 80	90°	Optional	White
S9656WW BK SQ	240/50	25	2200	3000	> 80	90°	Optional	Black
S9656WW WH SQG	240/50	25	2200	3000	> 80	90°	Optional	White
S9656CW WH SQ	240/50	25	2300	4000	> 80	90°	Optional	White
S9656CW BK SQ	240/50	25	2300	4000	> 80	90°	Optional	Black
S9656CW WH SQG	240/50	25	2300	4000	> 80	90°	Optional	White

For terms and conditions of catalogue data use, refer to INDEX



## UNI LED S9658 SQ - 50W

Square profile IP54 LED downlights

### Application

Ideal for commercial interior spaces such as foyers and office areas


### Design Specifications

- Durable die-cast aluminium body profile with a square trim profile
- Stylish white or black powder coat finish
- High output COB LED chip
- Multi-faceted reflector system
- Integral constant current LED driver for easy installation, with flex and plug
- Optional dropped glass accessory


### Performance

Dimmable Driver - Optional

Dimmer Type - Trailing edge, 1-10V, DALI / DSI

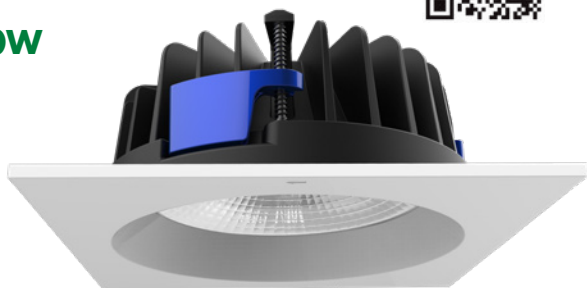


### Dimensions

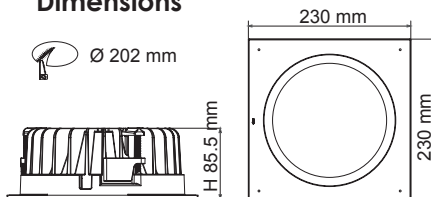

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

**S9658WW SQ at 3000K**



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9658WW WH SQ	240/50	50	4000	3000	> 80	90°	Optional	White
S9658WW BK SQ	240/50	50	4000	3000	> 80	90°	Optional	Black
S9658WW WH SQG	240/50	50	4000	3000	> 80	90°	Optional	White
S9658CW WH SQ	240/50	50	4200	4000	> 80	90°	Optional	White
S9658CW BK SQ	240/50	50	4200	4000	> 80	90°	Optional	Black
S9658CW WH SQG	240/50	50	4200	4000	> 80	90°	Optional	White

For terms and conditions of catalogue data use, refer to INDEX



## MANSFIELD S9530 - 12W/20W/35W

Square and Rectangular profile AR111  
recessed downlights

### Application



Ideal for any residential or  
commercial interior space



### Design Specifications

- Precise pressed metal surface mount profile
- Stylish powder coat finish
- LED AR111 lamp module (s)
- Flex and plug fitted
- Changeable multi-faceted reflector system
- Precision designed optics, standard beam distribution refer to model No.
- Optional 20° and 60° available for AR111/3500, 3000K, CRI > 80

### Dimensions

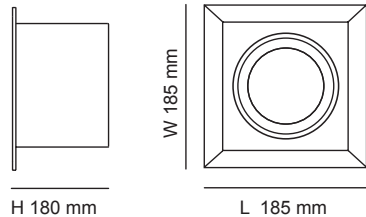

### Performance

Dimmable Driver - Refer model No.


Dimmer Type - Trailing edge, 1-10V, DALI / DSI  
(excluding S9530/3500)




### Photometric Data

Unit: cd C0/C180 — C90/C270 —

**S9530/700 at 3000K**



**S9530/3500 at 3000K**





## Dimensions




L x W: 310 x 170 mm



H 180 mm



W 185 mm



L 334 mm



AR111/700



AR111/1700



AR111/3500

## Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Dimmable	Beam Angle	Fitting Colour
S9530/700 WH	240/50	12	750	3000	Yes	24°	White
S9530/700 SL	240/50	12	750	3000	Yes	24°	Silver
S9530/1700 WH	240/50	20	1600	3000	Yes	24°	White
S9530/1700 SL	240/50	20	1600	3000	Yes	24°	Silver
S9530/3500 WH	240/50	35	3300	3000	Optional	40°	White
S9530/3500 SL	240/50	35	3300	3000	Optional	40°	Silver
S9530/2x700 WH	240/50	2 x 12	1500	3000	Yes	24°	White
S9530/2x700 SL	240/50	2 x 12	1500	3000	Yes	24°	Silver
S9530/2x1700 WH	240/50	2 x 20	3200	3000	Yes	24°	White
S9530/2x1700 SL	240/50	2 x 20	3200	3000	Yes	24°	Silver
S9530/2x3500 WH	240/50	2 x 35	6600	3000	Optional	40°	White
S9530/2x3500 SL	240/50	2 x 35	6600	3000	Optional	40°	Silver



TC SELECTABLE

DUAL POWER

## NEWMAN MKII S9545 TC - 25W/36W

Rotable round gimbal LED Shoplight with  
selectable colour temperature

### Application


Ideal for any retail or  
commercial interior space

### Design Specifications

- Durable die-cast aluminium body profile, with white trim
- Dual power selection 25W/36W via an integral DIP switch
- Stylish white powder coat finish
- Textured glass diffuser
- High efficiency SMD LED chips 60° reflector system
- Constant current non-dimmable LED driver, with flex and plug



### Dimensions

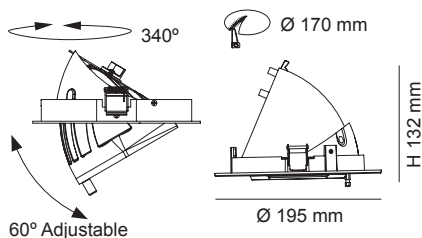

### Performance


Dimmable Driver - Optional

Dimmer Type - Trailing edge, 1-10V, DALI / DSI

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9545TC/DP/WH at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9545TC/WH/DP	240/50	25 36	3000/3200/3100 3900/4200/4000	3000/4000/5700	> 80	60°	Optional	White

For terms and conditions of catalogue data use, refer to INDEX







## NEWMAN III S9525 - 15W/25W/35W

Rotable scoop LED Shoplight

### Application


Ideal for any retail or commercial interior space

### Design Specifications

- Durable die-cast aluminium body profile
- Stylish white powder coat finish
- Optimum tilting function 60° (-15° ~ +45°) and rotating 340°
- High output COB LED chip, 40° standard beam, 24° optional
- High performance optical lens with a changeable multi-reflector system
- Constant current non-dimmable LED driver, with flex and plug



### Dimensions

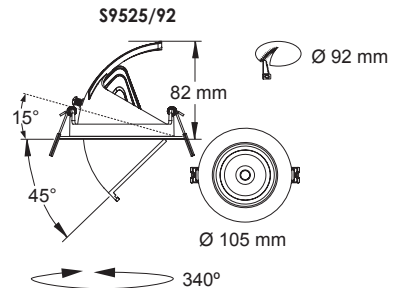

### Performance

Dimmable Driver - Refer model No.

Dimmer Type - Trailing edge, 1-10V, DALI / DSI




### Photometric Data

Unit: cd C0/C180 — C90/C270 —


S9525/92WW/WH at 3000K

S9525/145WW/WH at 3000K

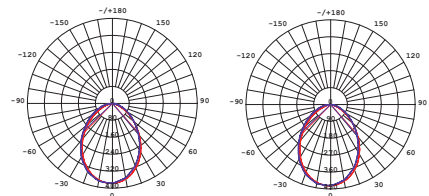




S9525/125

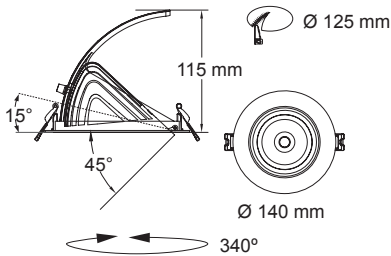

S9525/145

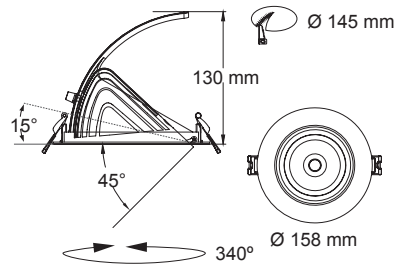

## Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9525/92WW/WH	240/50	15	1300	3000	> 80	40°	Yes	White
S9525/92CW/WH	240/50	15	1400	4000	> 80	40°	Yes	White
S9525/92DL/WH	240/50	15	1500	5700	> 80	40°	Yes	White
S9525/125WW/WH	240/50	25	1900	3000	> 80	40°	Optional	White
S9525/125CW/WH	240/50	25	2000	4000	> 80	40°	Optional	White
S9525/125DL/WH	240/50	25	2100	5700	> 80	40°	Optional	White
S9525/145WW/WH	240/50	35	2600	3000	> 80	40°	Optional	White
S9525/145CW/WH	240/50	35	2700	4000	> 80	40°	Optional	White
S9525/145DL/WH	240/50	35	2800	5700	> 80	40°	Optional	White

For terms and conditions of catalogue data use, refer to INDEX





## WASH S9681 - 8W/13W

Rotable 355°, LED wall washer downlight

### Application


Ideal for any retail or commercial interior space

### Design Specifications

- Multifunction design of either a downlight or a wall washer, 8 or 13 watt models
- Durable die-cast aluminium body profile
- Stylish powder coat finish in white
- Optimum tilting function 35° and rotating 355°
- High output COB LED chip
- S9681/85 standard beam distribution is 36°, optional 24°/50°
- S9681/115 standard beam distribution is 40°, optional 20°/30°/70°
- Constant current non-dimmable LED driver, complete with flex and plug



### Dimensions

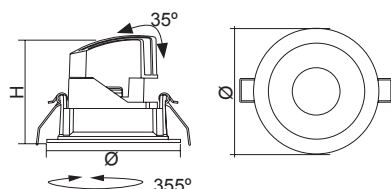

### Performance

Dimmable Driver - Optional


Dimmer Type - Trailing edge, 1-10V, DALI / DSI




### Photometric Data

Unit: cd C0/C180 — C90/C270

S9681/85CW at 4000K



S9681/115CW at 4000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	CUT OUT (mm)	Dimensions (D x H mm)
S9681/85CW	240/50	8	1000	4000	> 80	36°	White	Ø75	85 x 67
S9681/115CW	240/50	13	1500	4000	> 80	40°	White	Ø100	115 x 100

For terms and conditions of catalogue data use, refer to INDEX



## POP-EYE S9601 - 13W/38W

Directional and 355° rotatable LED shop light

### Application

Ideal for any residential or commercial interior space

### Design Specifications

- Durable die-cast aluminium body profile
- Stylish white powder coat finish
- High output COB LED chip, with a changeable multi-reflector system, standard 30°, optional 20°/40° beam distributions
- Hidden cable design provides a clean architectural style
- Constant current non-dimmable LED driver, complete with flex and plug


### Performance

Dimmable Driver - Optional

Dimmer Type - Trailing edge, 1-10V, DALI / DSI  
(excluding S9601/188)



### Dimensions

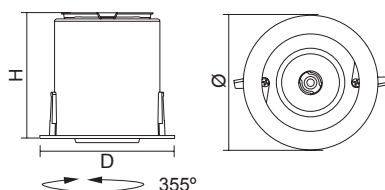


### Photometric Data

Unit: cd C0/C180 — C90/C270

S9601/112/15CW at 4000K

S9601/140/25CW at 4000K

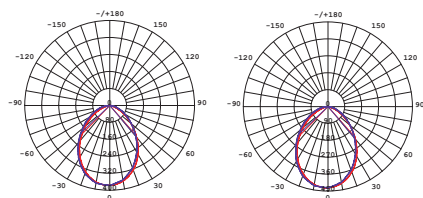

### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Cut Out (mm)	Dimensions (D x H mm)
S9601/112/15CW	240/50	13	1500	4000	> 80	30°	White	Ø100	112 x 106
S9601/140/25CW	240/50	18	2500	4000	> 80	30°	White	Ø130	140 x 167
S9601/140/34CW	240/50	25	3400	4000	> 80	30°	White	Ø130	140 x 167
S9601/188/42CW	240/50	34	4200	4000	> 80	30°	White	Ø175	188 x 194
S9601/188/49CW	240/50	38	4900	4000	> 80	30°	White	Ø175	188 x 194



## BENTO S9691 - 5W/38W

Square profile IP44 LED downlight

### Application

Ideal for any residential or commercial interior space



### Design Specifications

- Square bezel combined with a round body to suit a round cut out
- Deep recessed angle fitting enables precise optical control
- Durable die-cast aluminium body profile
- Stylish white matt powder coat finish
- High output COB LED chip design with a changeable multi-reflector system
- S9691/85 and S9691/110 optional beam distributions 15°/24°/50°
- S9691/135 and S9691/160, optional beam distributions 10°/20°/40°/70°
- Constant current non-dimmable LED driver, complete with flex and plug



**S9691/85**


### Dimensions



### Performance

Dimmable Driver - Refer model No.

Dimmer Type - Trailing edge, 1-10V, DALI / DSI  
(excluding S9691/135, S9691/160)





**S9691/85 & S9691/110 only**

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

**S9691/85/10CW at 4000K**

**S9691/160/49CW at 4000K**













S9691/110



S9691/135



S9691/160



## Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimmable	Dimensions (D x H mm)
S9691/85/7CW	240/50	5	700	4000	> 80	36°	Matt White	Yes	85 x 76
S9691/85/10CW	240/50	8	1000	4000	> 80	36°	Matt White	Yes	85 x 76
S9691/110/15CW	240/50	13	1500	4000	> 80	36°	Matt White	Yes	110 x 92
S9691/135/34CW	240/50	27	3400	4000	> 80	30°	Matt White	Optional	135 x 127
S9691/135/42CW	240/50	34	4200	4000	> 80	30°	Matt White	Optional	135 x 127
S9691/135/49CW	240/50	38	4900	4000	> 80	30°	Matt White	Optional	135 x 127
S9691/160/42CW	240/50	34	4200	4000	> 80	30°	Matt White	Optional	160 x 134
S9691/160/49CW	240/50	38	4900	4000	> 80	30°	Matt White	Optional	160 x 134



## PUNNET S9651 - 7W/50W

IP44 LED square downlight

### Application

Ideal for any residential or commercial interior space


### Design Specifications

- Square bezel combined with a round body to suit a round cut out
- Deep recessed angle fitting enables precise optical control
- Durable die-cast aluminium body profile with a stylish white matt trim finish
- CCT 4000K standard, optional 3000K and 5000K
- High efficiency SMD LED chips and prismatic diffuser
- Constant current non-dimmable LED driver, complete with flex and plug



### Dimensions

S9651/70



### Performance

Dimmable Driver - Refer model No.

Dimmer Type - Trailing edge, 1-10V, DALI / DSI  
(excluding S9695/175/50W)




### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9651/70CW/WH7W at 4000K


S9651/125CW/WH20W at 4000K

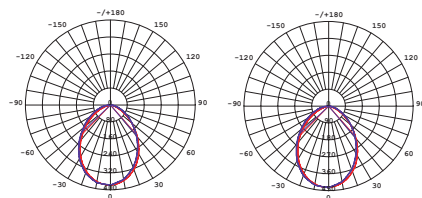


For terms and conditions of catalogue data use, refer to INDEX



**S9651/125**



**S9651/175**

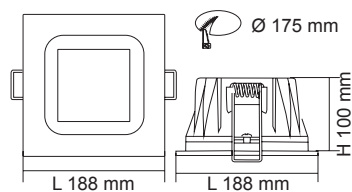

## Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9651/70CW/WH7W	240/50	7	800	4000	> 80	80°	Yes	Matt White
S9651/70CW/WH10W	240/50	10	1000	4000	> 80	80°	Yes	Matt White
S9651/125CW/WH20W	240/50	20	2000	4000	> 80	80°	Optional	Matt White
S9651/125CW/WH30W	240/50	30	2800	4000	> 80	80°	Optional	Matt White
S9651/175CW/WH35W	240/50	35	3500	4000	> 80	80°	Optional	Matt White
S9651/175CW/WH50W	240/50	50	4800	4000	> 80	80°	Optional	Matt White



## COLUMN S9603 - 13W/52W

Surface mount LED downlight,  
with three (3) sizes to select

### Application


Apartment foyers, commercial walkways,  
surface mount installation restrictions.

### Design Specifications

- Die cast aluminium body profile, concealed mounting screws and matt white powder coat finish, optional black finish to order
- Deep recessed angle fitting provides excellent glare control and light distribution
- High output COB LED , with changeable multi-reflector system
- Integral constant current, non-dimmable LED driver, 13 watt to 52 watt capacity
- Beam angle 36° standard, S9603/80 optional 15°/24°/50°, S9603/110, S9603/150 optional 10°/20°/40°/70°



### Dimensions

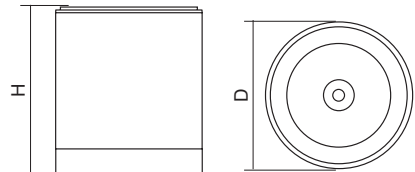


### Photometric Data

Unit: cd C0/C180 — C90/C270

S9603/80/15CW at 4000K

S9603/150/49CW at 4000K

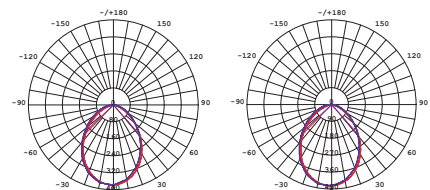

### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimmensions (D x H mm)
S9603/80/15CW	240/50	13	1500	4000	> 80	36°	Matt White	Ø 80 x 126
S9603/80/20CW	240/50	20	2000	4000	> 80	36°	Matt White	Ø 80 x 126
S9603/110/25CW	240/50	18	2500	4000	> 80	30°	Matt White	Ø 110 x 148
S9603/110/34CW	240/50	28	3400	4000	> 80	30°	Matt White	Ø 110 x 148
S9603/150/42CW	240/50	34	4200	4000	> 80	30°	Matt White	Ø 150 x 171
S9603/150/49CW	240/50	38	4900	4000	> 80	30°	Matt White	Ø 150 x 171
S9603/150/62CW	240/50	52	6200	4000	> 80	30°	Matt White	Ø 150 x 171

For terms and conditions of catalogue data use, refer to INDEX



## DICE S9015 - 9W/15W

Surface mount Square dimmable  
LED downlight

### Application

Ideal for any residential or  
commercial interior space

### Design Specifications

- Aluminium body profile, concealed mounting screws and matt white powder coat finish, optional black finish to order
- Surface mounted architectural square profile downlight
- Standard colour BLACK, optional matt WHITE
- Durable die-cast aluminium body profile
- High output COB LED chip, built-in constant current trailing edge dimmable LED driver (excluding S9015/80GU10)
- Changeable multi-reflector system with polycarbonate lens


### Performance

Dimmable Driver - Yes  
Dimmer Type - Trailing edge (excl. S9015/80GU10)




### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x H mm)
S9015/80WW/BK	240/50	9	700	3000	> 80	60°	Black	80 x 122
S9015/80CW/BK	240/50	9	800	4000	> 80	60°	Black	80 x 122
S9015/80DL/BK	240/50	9	800	6000	> 80	60°	Black	80 x 122
S9015/80GU10/BK	240/50	Refer to GU10 lamp page for details					Black	80 x 122
S9015/150WW/BK	240/50	15	1500	3000	> 80	60°	Black	150 x 247
S9015/150CW/BK	240/50	15	1500	4000	> 80	60°	Black	150 x 247
S9015/150DL/BK	240/50	15	1500	6000	> 80	60°	Black	150 x 247

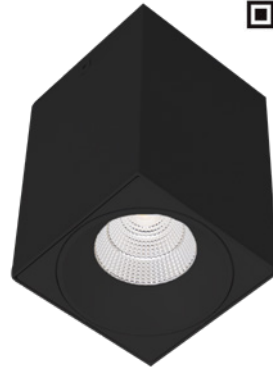


### Dimensions



### Photometric Data

Unit: cd C0/C180 — C90/C270  
S9015/80WW/BK at 3000K S9015/150WW/BK at 4000K

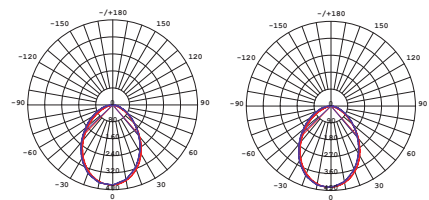



## DICE II S9016 - 8W

Surface mount Square  
dimmable LED downlight

### Application


Ideal for any residential foyers,  
features or commercial interior spaces

### Design Specifications

- Surface mounted architectural square or rectangular profile downlight
- Centre tilt 30° at each head
- Durable die-cast aluminium body profile, black finish as standard (optional) white finish available
- High output COB LED chip, polycarbonate optical lens, integral constant current trailing edge dimmable LED driver
- Changeable multi-reflector system



### Dimensions

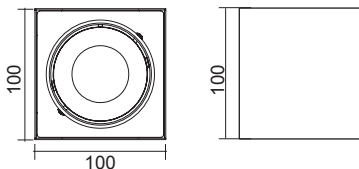

### Performance


Dimmable Driver - Yes

Dimmer Type - Trailing edge

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

**S9016WW/BK at 3000K**



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour	Dimensions (L x W x H mm)
S9016WW/BK	240/50	8	620	3000	> 90	60°	Yes	Black	100 x 100 x 100





## DICE II S9016/2 - 2 X 8W

Surface mount Rectangular  
dimmable LED downlight

### Application


Ideal for any residential foyers,  
features or commercial interior spaces

### Design Specifications

- Surface mounted architectural square or rectangular profile downlight
- Centre tilt 30° at each head
- Durable die-cast aluminium body profile, black finish as standard (optional) white finish available
- High output COB LED chip, polycarbonate optical lens, integral constant current trailing edge dimmable LED driver
- Changeable multi-reflector system



### Dimensions

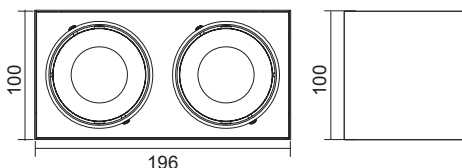

### Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour	Dimensions (L x W x H mm)
S9016/2WW/BK	240/50	2 x 8	2 x 620	3000	> 90	60°	Yes	Black	100 x 196 x 100




## ADAPTOR PLATE S9901, S9903, S9931, S9933

Interior downlight adaptor plates

### Design Specifications

- Pressed steel plate, black, satin nickel, matt white, or gloss white powder coat finish

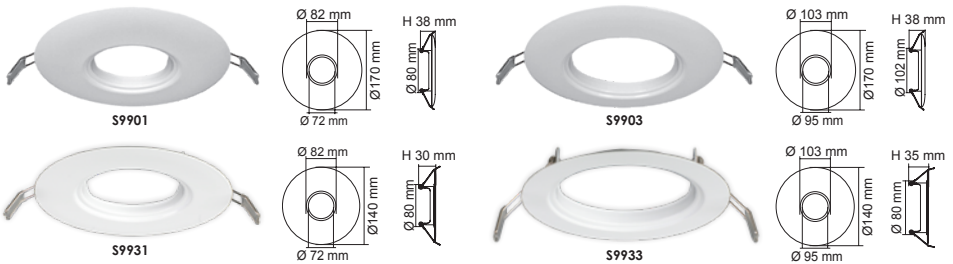

### Technical Specifications


Model No.	Internal (D mm)	Overall (D mm)	Colour	Suits
S9901BK	72	170	Black	S9001BK
S9901SN	72	170	Satin Nickel	S9001SN, S9045SN
S9901WH	72	170	Matt White	S9140WH, S9145WH, S9001WH, S9045WH
S9903BK	95	170	Black	S9003BK
S9903SN	95	170	Satin Nickel	S9003SN, S9046SN
S9903WH	95	170	Matt White	S9146WH, S9048WH, S9141WH, S9842WH
S9903GWH	95	170	Gloss White	S9041WH, S9046WH
S9931WH	72	140	Matt White	S9145WH
S9933WH	95	140	Matt White	S9146WH, S9048WH, S9141WH, S9842WH

## REDUCER RINGS S9922, S9923

Interior downlight adaptor plates

### Design Specifications

- Adaptor plate, gloss white powder coat finish

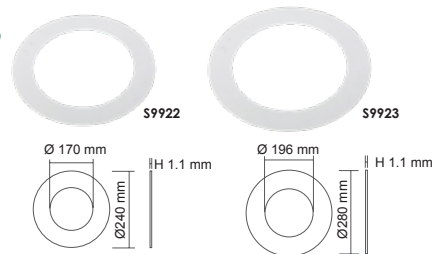

### Technical Specifications

Model No.	Internal (D mm)	Overall (D mm)	Colour	Suits
S9922	170	240	White	S9522, S9074, S9545, S9656
S9923	196	280	White	S9523, S9075

For terms and conditions of catalogue data use, refer to INDEX

