



SMARTER LIGHTING CHOICES

SINCE 1998



INTERIOR LIGHTING



EXTERIOR LIGHTING



SMART LIGHTING
CONTROLS



LED INTERIOR ARCHITECTURAL

A diverse selection of LED interior architectural pendants and wall mount luminaires, ideal for residential and commercial spaces.



The importance of EMC? Electromagnetic Compatibility, defines the use of different electronic devices (such as electrical appliances, medical equipment, LED's and drivers etc) to operate without interference with other devices. This is a mandatory label (and testing) requirement for Australian Lighting equipment covered by AS/NZS CISPR 15. ACMA also recognises equivalent standards CISPR 15 and EN 55015. If you are unsure ask your supplier for EMC compliance.





For interior products, the designated IP rating is "from below the ceiling" unless otherwise specified.



HALO SO3000 - 18W/35W

Dimmable architectural LED ceiling luminaire

Application


A creative design for residential or commercial spaces

Design Specifications

- Slim disc like appearance, 18 or 35 watt models
- Durable polycarbonate body profile with opal acrylic diffuser
- Simple twist lock installation mechanism
- High efficiency SMD LED chips
- CCT 4000K standard, optional 3000K or 5700K
- Integral constant current trailing edge dimmable LED driver
- Trim standard black or optional silver



Dimensions



Performance

Dimmable Driver - Yes


Dimmer Type - Trailing edge




Photometric Data

Unit: cd C0/C180 — C30/C210
cd C60/C240 — C90/C270

SO3000/30CW at 4000K



SO3000/40CW at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour	Dimensions (D x H mm)
SO3000/30CW	240/50	18	1450	4000	> 80	Yes	Black	Ø 300 x 51
SO3000/40CW	240/50	35	3300	4000	> 80	Yes	Black	Ø 400 x 68

For terms and conditions of catalogue data use, refer to INDEX



HALO SPL3000 - 18W/35W


Dimmable architectural LED pendant luminaire

Application


A creative design for residential or commercial spaces

Design Specifications

- Slim disc like appearance, standard trim colour black, optional silver
- Durable polycarbonate body profile with opal acrylic diffuser
- High efficiency SMD LED chips, 18 or 35 watt models
- Integral constant current trailing edge dimmable LED driver
- Suspension kits provided (standard length 1.5 m and adjustable)
- CCT 4000K standard, optional 3000 or 5700K

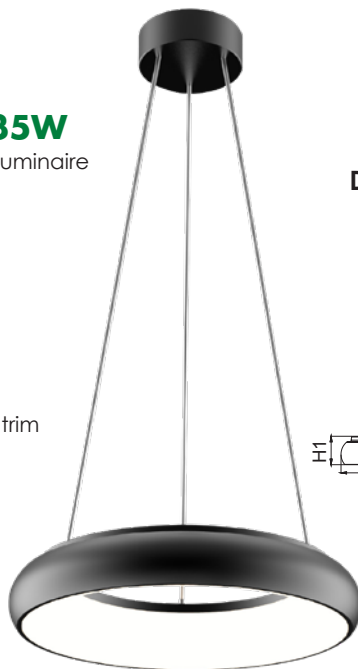

Dimensions



Performance

Dimmable Driver - Yes



Dimmer Type - Trailing edge

Photometric Data

Unit: cd C0/C180 C30/C210
cd C60/C240 C90/C270

SPL3000/30CW at 4000K

SPL3000/40CW at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour	Dimensions (D1 x H1, D2 x H2 mm)
SPL3000/30CW	240/50	18	1450	4000	> 80	Yes	Black	Ø 300 x 51, Ø 100 x 25
SPL3000/40CW	240/50	35	3300	4000	> 80	Yes	Black	Ø 400 x 68, Ø 130 x 35



FLAT SL2110 - 5W/30W

Dimmable profile ceiling luminaires

Application


A creative design for residential or commercial spaces, with a selection of 5, 12, 18 or 30 watt models

Design Specifications

- Seamless surface mounting base
- Robust polycarbonate diffuser, luminaire colour white
- Simple twist lock installation mechanism for the surface mount model. Pendant includes surface mount cap and three (3) x 1.5M adjustable stainless cables
- Integral constant current trailing edge dimmable LED driver
- CCT 4000K as standard, optional 3000K or 6000K



Dimensions



Performance

Dimmable Driver - Yes


Dimmer Type - Trailing edge




Photometric Data

Unit: cd C0/C180 — C90/C270 —

SL2110/10CW at 4000K



SL2110/50CW at 4000K





SL2110/10CW



SL2110/20CW



SL2110/30CW



SL2110/40CW



Colour temperature

- 4000K Cool White (Standard)
- 3000K Warm White (Option)
- 6000K Daylight (Option)

Installation Options

- SL2110/30, SL2110/40: Suspension kits included, (standard length 1.5m and adjustable)



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour	Dimensions (D x H mm)
SL2110/10CW	240/50	5	180	4000	> 80	Yes	White	Ø 100 x 50
SL2110/20CW	240/50	12	780	4000	> 80	Yes	White	Ø 160 x 50
SL2110/30CW	240/50	18	1200	4000	> 80	Yes	White	Ø 260 x 60
SL2110/40CW	240/50	30	2300	4000	> 80	Yes	White	Ø 350 x 60



PIP SPL020 - 5W

Ultra slim 5 watt architectural pendant luminaire

Application

A creative design for residential or commercial spaces

Design Specifications


- Ultra Slimline suspended tube profile, Ø30mm, two body profile lengths to select (300mm to order or 450mm as standard)
- Flush recessed ceiling plate to suit a standard Ø72 mm cut out
- Durable aluminium body profile, choice of black or white finish
- High efficiency COB LED chips, 160 lm
- Recessed downlight mounting installation with standard adjustable wire length up to 1.2 m

Performance

Dimmable Driver - No



Dimensions

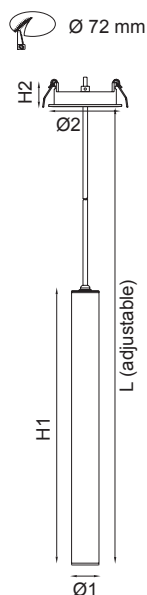

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (Ø1 x H1, Ø2 x H2 mm)
SPL020WW30	240/50	5	160	3000	> 80	25°	White	30 x 300, 80 x 26
SPL020WW45	240/50	5	160	3000	> 80	25°	White	30 x 450, 80 x 26
SPL020WW30BK	240/50	5	160	3000	> 80	25°	Black	30 x 300, 80 x 26
SPL020WW45BK	240/50	5	160	3000	> 80	25°	Black	30 x 450, 80 x 26



UNITREK SPL9017 - 9W

Dimmable 9 watt LED pendant luminaire

Application


A creative design for residential or commercial spaces

Design Specifications

- Architectural cylindrical profile, standard colour black, optional white
- Durable aluminium body profile
- High efficiency COB LED chips, with polycarbonate optical lens, beam distribution 60°, CRI>80, 25° and 40° options
- Changeable multi-reflector system
- Integral constant current trailing edge dimmable LED driver
- Standard adjustable wire length up to 1.2 m



Dimensions



Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (Ø1 x H1, Ø2 x H2 mm)
SPL9017WW/WH	240/50	9	700	3000	> 80	60°	White	65 x 260, 65 x 32
SPL9017WW/BK	240/50	9	700	3000	> 80	60°	Black	65 x 260, 65 x 32
SPL9017CW/WH	240/50	9	800	4000	> 80	60°	White	65 x 260, 65 x 32
SPL9017CW/BK	240/50	9	800	4000	> 80	60°	Black	65 x 260, 65 x 32
SPL9017DL/WH	240/50	9	800	6000	> 80	60°	White	65 x 260, 65 x 32
SPL9017DL/BK	240/50	9	800	6000	> 80	60°	Black	65 x 260, 65 x 32



RING SPL3200 - 17W/ 70W

Decorative multi - ring pendant LED luminaire

Application

Ideal for decorative interior designs

Design Specifications

- Aluminium circular body frame, colour black
- Opal acrylic diffuser
- High efficiency SMD LED design, CCT 3000K, CRI>80
- Constant current non-dimmable driver
- Choice of 17, 23, 30, 53, 70 watt models

Performance


Dimmable Driver - No






Dimensions


SPL3200/46




SPL3200/60




SPL3200/81



SPL3200/2R



SPL3200/3R



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
SPL3200/46	240/50	17	900	3000	> 80	25°	No	Black
SPL3200/60	240/50	23	1200	3000	> 80	25°	No	Black
SPL3200/81	240/50	30	1500	3000	> 80	25°	No	Black
SPL3200/2R	240/50	53	2700	3000	> 80	25°	No	Black
SPL3200/3R	240/50	70	3600	3000	> 80	25°	No	Black

COLOUR TEMPERATURE, THERE IS A DIFFERENCE



2700K



3000K



TC SELECTABLE COLOUR

WARM WHITE
2700K

COOL WHITE
4000K

DAYLIGHT
6000K



4000K



5000K



6000K

Lighting is more than just brightness or lumens. Make sure you take the time to select the right colour temperature to create the best visual appearance; your eyes don't tell lies!



CLASSIC RING SPL3100 - 45W/67W

Designer LED pendant luminaire

Application

A creative design for residential or commercial space

Design Specifications

- Polyurethane body, colour white
- Opal acrylic diffuser
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver, 45 or 67 watt models




Performance

Dimmable Driver - No



Dimensions

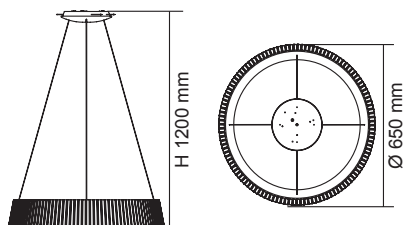

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
SPL3100/64	240/50	45	2250	3000	> 80	60°	No	White
SPL3100/84	240/50	67	3300	3000	> 80	60°	No	White

For terms and conditions of catalogue data use, refer to INDEX



STAN SFL018 - 43W

Versatile 43 watt dimmable LED floor lamp

Application

A creative design for residential or commercial office space


Design Specifications

- Stylish black aluminium body with polycarbonate diffuser
- Durable black powder coated body profile
- Touch dimmable with a memory function
- Integral constant current trailing edge dimmable LED driver
- Compact packaging, easy to assemble, plug and play driver, flex and plug
- CCT 3000K, beam angle 120°

Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge

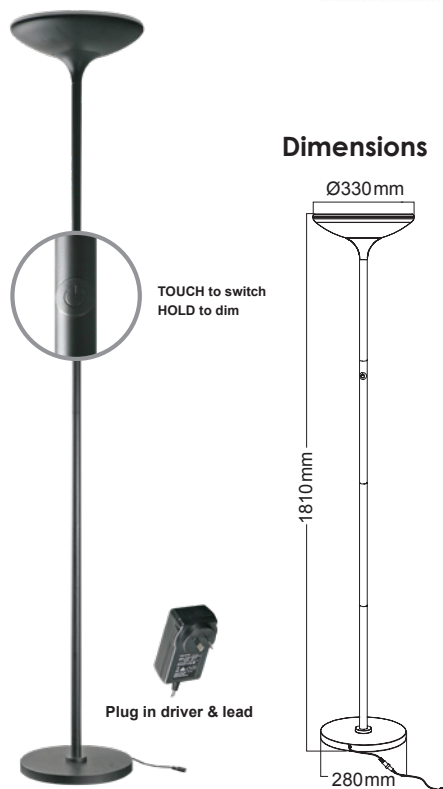

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
SFL018WW	240/50	43	3000	3000	> 80	120°	Yes	Black




AMBIENCE S9312 - 1W

Stylish interior wall mount LED luminaire

Application


Residential hallways, bedrooms, stairways

Design Specifications

- Square aluminum face profile, powder coat white finish
- Integral 240V, 1.2W control gear
- CCT 3000K, 140lm
- IP54 front only
- Cut out: 77 x 77mm
- Double insulation 



Dimensions

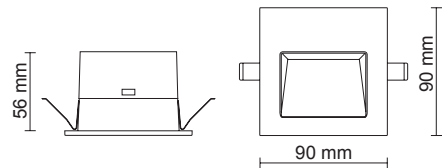


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9312 at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9312	240/50	1.2	140	3000	> 80	80°	No	White




AMBIENCE S9313 - 1W

Stylish interior wall mount LED luminaire

Application


Residential hallways, bedrooms, stairways

Design Specifications

- Square aluminum face profile, powder coat white finish
- Integral 240V, 1.2W control gear
- CCT 3000K, 140lm
- IP54 front only
- Cut out: 77 x 77mm
- Double insulation 



Dimensions

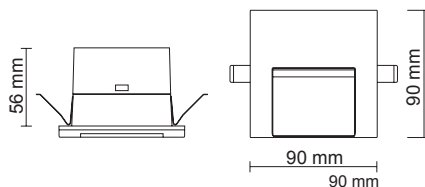


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9313 at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9313	240/50	1.2	140	3000	> 80	80°	No	White




AMBIENCE S9314 - 1W

Stylish interior wall mount LED luminaire

Application


Residential hallways, bedrooms, stairways

Design Specifications

- Square aluminum face profile, powder coat white finish
- Integral 240V, 1.2W control gear
- CCT 3000K, 140lm
- IP54 front only
- Cut out: 77 x 77mm
- Double insulation 



Dimensions

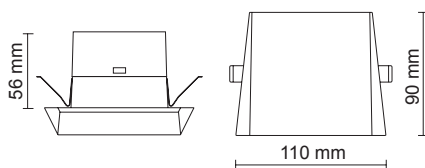


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9314 at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9314	240/50	1.2	140	3000	> 80	80°	No	White

SAL **PIXIE** AN AFFORDABLE CHOICE FOR HOME LIGHTING AUTOMATION



PIXIE



ANOVA S9105 - 4W

Compact 4 watt recessed LED cabinet luminaire

Application

Ideal for any residential or commercial interior space

Design Specifications


- Durable die-cast aluminium body profile
- Quality white powder coat or satin nickel plated finish
- High efficiency SMD LED chips
- Suitable drivers - PLUTO EGL12V/6W PLUTO 15DV, 30DV, 50DV
- 12V DC LED driver required
- Low profile design

Performance

Dimmable Driver - No




Dimensions



Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9105WW at 3000K



Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9105WW/WH	12V DC	4	280	3000	> 80	90°	No	White
S9105DL/WH	12V DC	4	280	6000	> 80	90°	No	White
S9105WW/SN	12V DC	4	280	3000	> 80	90°	No	Satin Nickel
S9105DL/SN	12V DC	4	280	6000	> 80	90°	No	Satin Nickel

For terms and conditions of catalogue data use, refer to INDEX



ANOVA S9105 SR - 4W

Compact 4 watt surface mount LED cabinet luminaire

Application


Ideal for any residential or commercial interior space

Design Specifications

- Durable die-cast aluminium body profile
- Quality white powder coat or satin nickel plated finish
- High efficiency SMD LED chips
- Suitable drivers - PLUTO EGL12V/6W
PLUTO 15DV, 30DV, 50DV
- 12V DC LED driver required
- Low profile design



Dimensions




Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270

S9105WW SR at 3000K



Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9105WW SR/WH	12V DC	4	280	3000	> 80	90°	No	White
S9105DL SR/WH	12V DC	4	280	6000	> 80	90°	No	White
S9105WW SR/SN	12V DC	4	280	3000	> 80	90°	No	Satin Nickel
S9105DL SR/SN	12V DC	4	280	6000	> 80	90°	No	Satin Nickel



ANOVA S9105 ST - 4W

Compact 4 watt surface mount
LED cabinet luminaire

Application


Ideal for any residential or
commercial interior space

Design Specifications

- Durable die-cast aluminium body profile
- Quality white powder coat or satin nickel plated finish
- High efficiency LED chips
- Low profile design
- Suitable drivers - PLUTO EGL12V/6W
PLUTO 15DV, 30DV, 50DV
- 12V DC driver required



Dimensions




Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9105WW ST at 3000K



Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9105WW ST/WH	12V DC	4	280	3000	> 80	90°	No	White
S9105DL ST/WH	12V DC	4	280	6000	> 80	90°	No	White
S9105WW ST/SN	12V DC	4	280	3000	> 80	90°	No	Satin Nickel
S9105DL ST/SN	12V DC	4	280	6000	> 80	90°	No	Satin Nickel

For terms and conditions of catalogue data use, refer to INDEX



BROOM S9311 - 3W

LED 3 watt recessed square
profile wall luminaire

Application


Ideal for any residential or
commercial interior space

Design Specifications

- Durable aluminium body profile
- Quality white powder coat or satin nickel plated finish
- High efficiency SMD LED chips, 3000K, CRI >80, beam distribution 105°
- Opal acrylic diffuser
- Suitable drivers - PLUTO EGL12V/6W PLUTO 15DV, 30DV, 50DV
- 12V AC or DC driver required



Dimensions

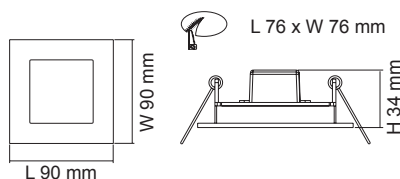


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9311 at 3000K



Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9311 WH	12V AC/DC	3	110	3000	> 80	105°	No	White
S9311 SN	12V AC/DC	3	110	3000	> 80	105°	No	Satin Nickel
S9311 DL SN	12V AC/DC	3	110	6000	> 80	105°	No	Satin Nickel



DARHAM SQUARE S9316 - 1.5W

LED 1.5 watt recessed square
profile wall luminaire


Application

Ideal for any residential stairs, walkways or
commercial interior space

Design Specifications

- Durable die-cast aluminium body profile
- Quality white powder coat finish or anodized silver
- High efficiency SMD LED chips
- Opal acrylic diffuser with glass cover
- Suitable drivers - PLUTO EGL12V/6W PLUTO 15DV, 30DV, 50DV
- 12V AC or DC driver required
- Optional accessories, pre-install box for S9316 only (L x W x H: 218 x 133 x 74mm)

Dimensions

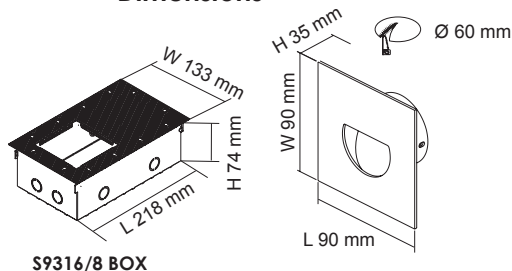


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270

S9316 at 3000K



Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
S9316 WH	12V AC/DC	1.5	110	3000	> 80	No	White
S9316 ALU	12V AC/DC	1.5	110	3000	> 80	No	Anodized Silver

For terms and conditions of catalogue data use, refer to INDEX



DARHAM ROUND S9317 - 1.5W

LED 1.5 watt recessed round profile wall luminaire

Application


Ideal for any residential stairs, walkways or commercial interior space

Design Specifications

- Durable die-cast aluminium body profile
- Quality white powder coat finish or anodized silver
- High efficiency SMD LED chips
- Opal acrylic diffuser with glass cover
- Suitable drivers - PLUTO EGL12V/6W PLUTO 15DV, 30DV, 50DV
- 12V AC or DC driver required



Dimensions




Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270

S9317 at 3000K



Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
S9317 WH	12V AC/DC	1.5	110	3000	> 80	No	White
S9317 ALU	12V AC/DC	1.5	110	3000	> 80	No	Anodized Silver



LEEMAN S9318 - 1.5W

LED 1.5 watt recessed square profile wall luminaire

Application


Residential stairs, walkways and interior commercial features

Design Specifications

- Durable aluminium body profile
- Quality matt white powder coat finish or anodized silver
- High efficiency SMD LED chips, CCT 3000K, beam distribution 86°
- Frosted glass diffuser
- Suitable drivers - PLUTO EGL12V/6W PLUTO 15DV, 30DV, 50DV
- 12V AC or DC driver required
- Optional accessories, pre-install box for S9318 only (L x W x H: 218 x 133 x 74mm)



Dimensions

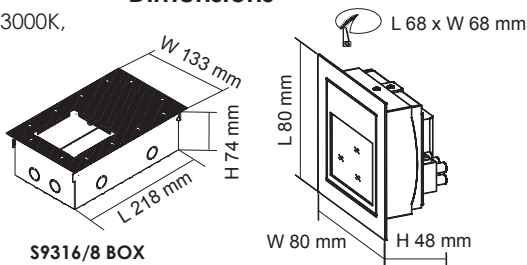


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270

S9318 at 3000K



Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
S9318 AS	12V AC/DC	1.5	70	3000	> 80	86°	Anodized Silver
S9318 MW	12V AC/DC	1.5	70	3000	> 80	86°	Matt White

For terms and conditions of catalogue data use, refer to INDEX



LEEMAN MINI S9319 - 1.5W

LED 1.5 watt recessed MINI square profile wall luminaire

Application


Residential stairs, walkways and commercial features

Design Specifications

- Durable aluminium body profile
- Quality white powder coat finish or anodised silver
- High efficiency SMD LED chips, CCT 3000K, beam distribution 86°
- Frosted glass diffuser
- Suitable drivers - PLUTO EGL12V/6W
PLUTO 15DV, 30DV, 50DV
- 12V AC or DC driver required



Dimensions




Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270

S9319 at 3000K



Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
S9319 AS	12V AC/DC	1.5	70	3000	> 80	86°	Anodized Silver
S9319 MW	12V AC/DC	1.5	70	3000	> 80	86°	Matt White




CUBE II S9320 - 10W

LED 10 watt surface mounted CUBE wall luminaire

Application


Ideal for any residential or commercial interior or exterior space

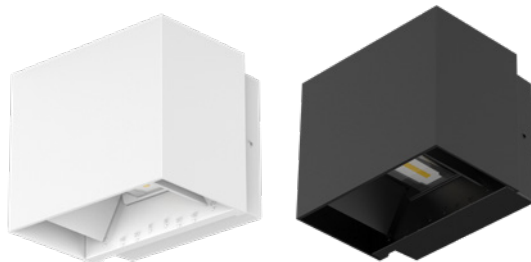

Design Specifications

- Durable aluminium body profile, colour white & black
- Quality powder coat finish
- High efficiency SMD LED chips
- Independent up & down beam angle adjustable from 0° to 60°
- Integral constant current non-dimmable LED driver
- Indirect illumination optical performance

Dimensions

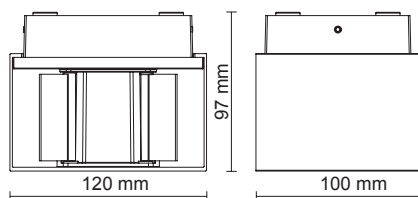


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C30/C210
cd C60/C240 — C90/C270






S9320WW at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
S9320WW/WH	240/50	10	750	3000	> 80	No	White
S9320WW/BK	240/50	10	750	3000	> 80	No	Black
S9320NDL/WH	240/50	10	900	5000	> 80	No	White
S9320NDL/BK	240/50	10	900	5000	> 80	No	Black

For terms and conditions of catalogue data use, refer to INDEX





UD S9356 - 3W/12W

Adjustable LED surface mounted profile wall luminaires

Application

Ideal for any residential or commercial interior space

Design Specifications

- Durable aluminium body profile
- Quality white powder coat finish
- High efficiency SMD LED chips, 3000K
- Up & Down beam angle adjustable from 0° to 120°
- Integral constant current non-dimmable
- LED driver, choice of 3 or 12 watt models



S9356/160WW/WH

Performance

Dimmable Driver - Optional, trailing edge refer model selection




Dimensions

S9356/160WW/WH




S9356/610WW/WH




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
S9356/160WW/WH	240/50	3	250	3000	> 80	No	White
S9356/610WW/WH	240/50	12	800	3000	> 80	Optional	White

For terms and conditions of catalogue data use, refer to INDEX

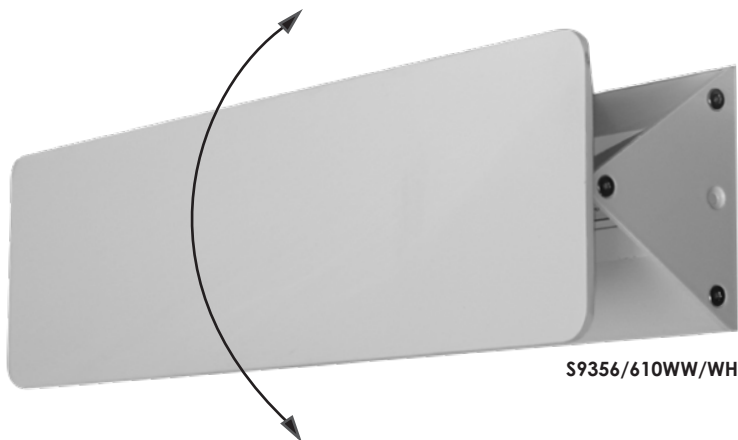

S9356/610WW/WH





LOUNGE III S9327 - 10W/18W

10/18 watt decorative IP54 architectural
LED wall mount luminaire

Application

Ideal for any residential or commercial
interior or exterior space

Design Specifications

- Durable aluminium body profile
- Quality white or black powder coat finish
- High efficiency SMD LED chips
- Indirect illumination optical performance
- Integral constant current non-dimmable driver

Performance


Dimmable Driver - No




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (L x W x H mm)
S9327/150WW/WH	240/50	10	400	3000	> 80	White	150 x 100 x 92
S9327/150WW/BK	240/50	10	400	3000	> 80	Black	150 x 100 x 92
S9327/150NDL/WH	240/50	10	500	5000	> 80	White	150 x 100 x 92
S9327/150NDL/BK	240/50	10	500	5000	> 80	Black	150 x 100 x 92
S9327/300WW/WH	240/50	18	720	3000	> 80	White	300 x 100 x 92
S9327/300WW/BK	240/50	18	720	3000	> 80	Black	300 x 100 x 92
S9327/300NDL/WH	240/50	18	900	5000	> 80	White	300 x 100 x 92
S9327/300NDL/BK	240/50	18	900	5000	> 80	Black	300 x 100 x 92

For terms and conditions of catalogue data use, refer to INDEX

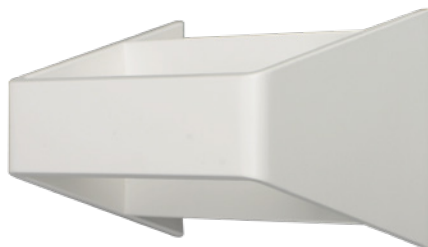


Dimensions



Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9327/300WW at 3000K





TC SELECTABLE

LOUNGE II S9328 TC - 9W/15W

9/15 watt decorative IP54 architectural
LED wall mount luminaire, with selectable CCT

Application


A decorative architectural solution for residential
& commercial interior or exterior space

Design Specifications

- Convenient TC selectable colour temperature, 3000K/4000K/5000K
- Durable white or black powder coated finish
- Integral non-dimmable control gear
- Robust die-cast aluminium body profile
- High efficiency SMD LED chips
- Indirect illumination optical performance



Dimensions

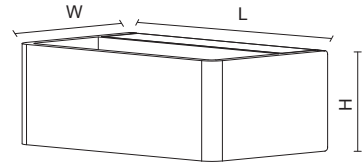

Performance


Dimmable Driver - No




Photometric Data

Unit: cd C0/C180 — C90/C270

S9328/150TC at 3000K



S9328/220TC at 5000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (L x W x H mm)
S9328/150TC/WH	240/50	9	500/600/550	3000/4000/5000	> 80	White	150 x 90 x 55
S9328/150TC/BK	240/50	9	500/600/550	3000/4000/5000	> 80	Black	150 x 90 x 55
S9328/220TC/WH	240/50	15	800/1000/900	3000/4000/5000	> 80	White	220 x 90 x 55
S9328/220TC/BK	240/50	15	800/1000/900	3000/4000/5000	> 80	Black	220 x 90 x 55

For terms and conditions of catalogue data use, refer to INDEX

Linked in YouTube

