



SMARTER LIGHTING CHOICES

SINCE 1998




INTERIOR LIGHTING



EXTERIOR LIGHTING




SMART LIGHTING
CONTROLS



LED TRACK LIGHTS

A stylish selection of decorative interior LED track systems, ideal for retail environments.






Before selecting a track-light, check out for the marks of Compliance and Safety. Starting with the RCM mark, this signals that the product has been tested to all relevant Australian Safety standards, to ensure the product delivers its designed safety performance.

Need more information on AS/NZS 60598 safety and compliance? Check out the SAL web FAQ's or speak to your local SAL team member.





For Interior products, the designated IP rating is "from below the ceiling" unless otherwise specified.



UNIVERSAL SINGLE CIRCUIT TRACK & ACCESSORIES STR4800


Single circuit track universal HALO type

Application


Designed for decorative and creative retail applications

Design Specifications

- Extruded aluminium profile, with quality powder coat finish
- Length 1 m or 2 m
- Complete with end cap and live end
- Track components: Straight joiner, Live end, Live centre feed, L-shaped joiner, T-shaped joiner, Cross joiner, Track adaptor, Suspension kit
- Rating: TOTAL current capacity 10A

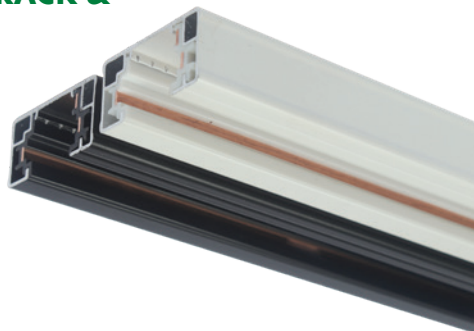


Dimensions

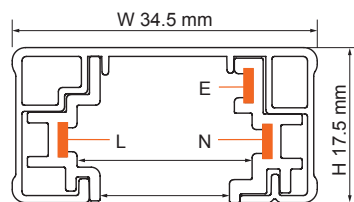


Track Components

Straight Joiner




| Model No. | Colour |
|------------|--------|
| STR4801 WH | White |
| STR4801 BK | Black |

Live End




| Model No. | Colour |
|------------|--------|
| STR4802 WH | White |
| STR4802 BK | Black |

Live Centre Feed




| Model No. | Colour |
|------------|--------|
| STR4803 WH | White |
| STR4803 BK | Black |

L-shaped Joiner




| Model No. | Colour |
|------------|--------|
| STR4804 WH | White |
| STR4804 BK | Black |

T-shaped Joiner



| Model No. | Colour |
|------------|--------|
| STR4805 WH | White |
| STR4805 BK | Black |

Cross Joiner



| Model No. | Colour |
|------------|--------|
| STR4806 WH | White |
| STR4806 BK | Black |

Track Adaptor



| Model No. | Colour |
|------------|--------|
| STR4808 WH | White |
| STR4808 BK | Black |

Maximum (mass) load limit per track adaptor is 2kg

Suspension Kit




| Model No. | Colour |
|-------------|-----------|
| SSI1512 (I) | Stainless |

For terms and conditions of catalogue data use, refer to INDEX



SINGLE CIRCUIT TRACK DIAGRAM

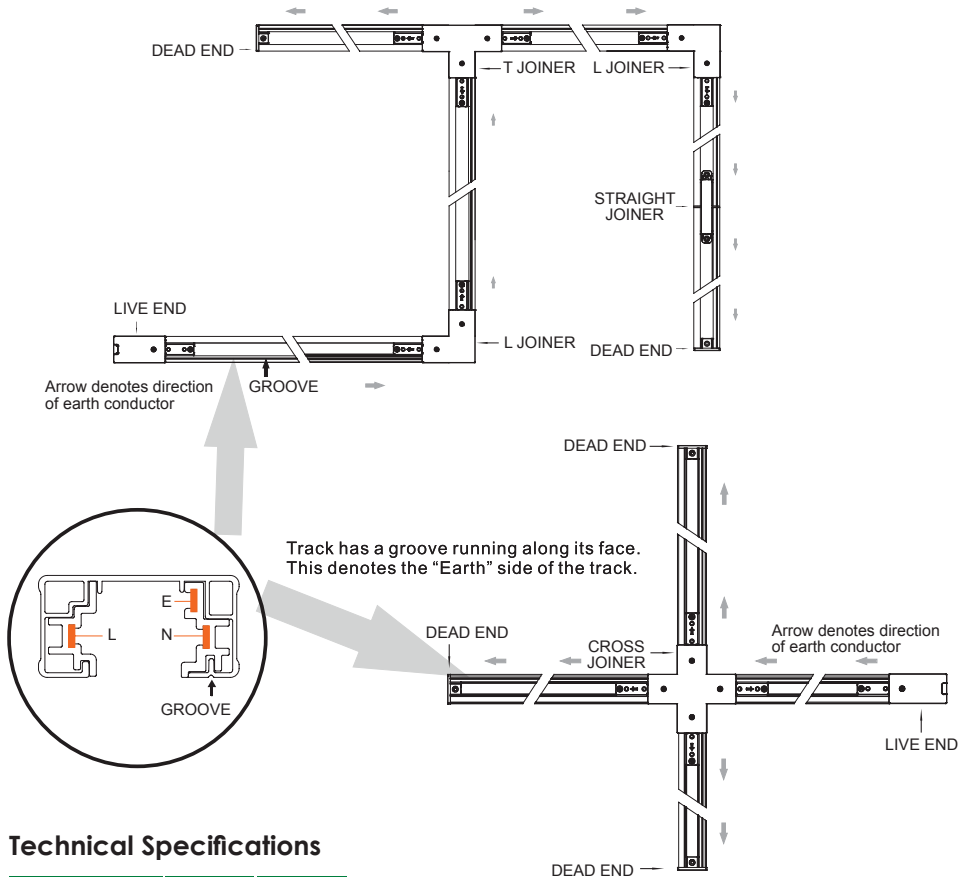

Technical Specifications

| Model No. | Length | Colour |
|--------------|--------|--------|
| STR4800/1 WH | 1 m | White |
| STR4800/1 BK | 1 m | Black |
| STR4800/2 WH | 2 m | White |
| STR4800/2 BK | 2 m | Black |





UNITREK STR9017 - 9W

Dimmable 9 watt architectural track spot, with integral driver - Unitrek single circuit

Application


Ideal for decorative interior and retail designs

Design Specifications

- Architectural cylindrical profile
- Aluminium body profile, colour matt white or black
- High output COB LED chip, CRI >80, CCT 3000K/5000K
- Changeable multi-faceted reflector system, polycarbonate lens, 40° beam distribution, 25° and 60° options
- 9 watt integral trailing edge dimmable driver




Dimensions



Photometric Data

Unit: cd C0/C180 — C90/C270

STR9017/9W/WW at 3000K



Performance

Dimmable Driver - Yes
Dimmer Type - Trailing edge



Technical Specifications

| Model No. | Input (V)/(Hz) | Power (W) | Lumen (lm) | CCT (K) | CRI | Beam Angle | Dimmable | Fitting Colour | Dimension (Ø x H mm) |
|-------------------|----------------|-----------|------------|---------|------|------------|----------|----------------|----------------------|
| STR9017/9W/WW/WH | 240/50 | 9 | 700 | 3000 | > 80 | 40° | Yes | White | Ø 65 x 165 |
| STR9017/9W/WW/BK | 240/50 | 9 | 700 | 3000 | > 80 | 40° | Yes | Black | Ø 65 x 165 |
| STR9017/9W/NDL/WH | 240/50 | 9 | 800 | 5000 | > 80 | 40° | Yes | White | Ø 65 x 165 |
| STR9017/9W/NDL/BK | 240/50 | 9 | 800 | 5000 | > 80 | 40° | Yes | Black | Ø 65 x 165 |

For terms and conditions of catalogue data use, refer to INDEX



UNITREK STR9017 - 15W

Dimmable 15 watt single circuit track spot, with integral driver

Application

Ideal for decorative interior or residential designs

Design Specifications

- Architectural cylindrical profile
- Aluminium body profile, colour matt white or black
- High output COB LED chip, CRI >80, CCT 3000K/5000K
- Changeable multi-faceted reflector system, polycarbonate lens, 40° beam distribution, 25° and 60° options
- 15 watt integral trailing edge dimmable driver

Performance

Dimmable Driver - Yes
Dimmer Type - Trailing edge




Technical Specifications

| Model No. | Input (V)/(Hz) | Power (W) | Lumen (lm) | CCT (K) | CRI | Beam Angle | Dimmable | Fitting Colour | Dimension (Ø x H mm) |
|--------------------|----------------|-----------|------------|---------|------|------------|----------|----------------|----------------------|
| STR9017/15W/WW/WH | 240/50 | 15 | 1200 | 3000 | > 80 | 40° | Yes | White | Ø 65 x 175 |
| STR9017/15W/WW/BK | 240/50 | 15 | 1200 | 3000 | > 80 | 40° | Yes | Black | Ø 65 x 175 |
| STR9017/15W/NDL/WH | 240/50 | 15 | 1300 | 5000 | > 80 | 40° | Yes | White | Ø 65 x 175 |
| STR9017/15W/NDL/BK | 240/50 | 15 | 1300 | 5000 | > 80 | 40° | Yes | Black | Ø 65 x 175 |




Dimensions



Photometric Data

Unit: cd C0/C180 — C90/C270

STR9017/15W/NDL at 5000K





UNITREK STR9017 - 30W

30 watt architectural track spot, with integral driver - Unitrek single circuit

Application

Ideal for decorative interior and retail designs

Design Specifications

- Architectural cylindrical profile
- Aluminium body profile, colour matt white or black
- High output COB LED chip, CRI >80, CCT 3000K/5000K
- Changeable multi-faceted reflector system, polycarbonate lens, 36° beam distribution, 15° and 25° options
- 30 watt integral non-dimmable LED driver

Performance

Dimmable Driver - No




Technical Specifications

| Model No. | Input (V)/(Hz) | Power (W) | Lumen (lm) | CCT (K) | CRI | Beam Angle | Dimmable | Fitting Colour | Dimension (Ø x H mm) |
|--------------------|----------------|-----------|------------|---------|------|------------|----------|----------------|----------------------|
| STR9017/30W/WW/WH | 240/50 | 30 | 2700 | 3000 | > 80 | 36° | No | White | Ø 85 x 180 |
| STR9017/30W/WW/BK | 240/50 | 30 | 2700 | 3000 | > 80 | 36° | No | Black | Ø 85 x 180 |
| STR9017/30W/NDL/WH | 240/50 | 30 | 2800 | 5000 | > 80 | 36° | No | White | Ø 85 x 180 |
| STR9017/30W/NDL/BK | 240/50 | 30 | 2800 | 5000 | > 80 | 36° | No | Black | Ø 85 x 180 |

For terms and conditions of catalogue data use, refer to INDEX




Dimensions



Photometric Data

Unit: cd C0/C180 — C90/C270

STR9017/30W/WW at 3000K





SPOCK STR4866 - 15W

15 watt single circuit LED rotatable track light

Application


Designed for decorative residential and interior retail applications

Design Specifications

- Premium aluminium body profile, white or black finish
- Quality powder coated finish, high output COB LED chip, CRI >80
- Beam angle 24° standard, 45° optional, CCT 3000K/4000K
- High performance multi-faceted reflector system, integral constant current non-dimmable LED driver




Dimensions



Photometric Data

Unit: cd C0/C180 — C30/C210
cd C60/C240 — C90/C270

STR4866CW at 4000K



Performance

Dimmable Driver - No



Technical Specifications

| Model No. | Input (V)/(Hz) | Power (W) | Lumen (lm) | CCT (K) | CRI | Beam Angle | Dimmable | Fitting Colour |
|--------------|----------------|-----------|------------|---------|------|------------|----------|----------------|
| STR4866WW/WH | 240/50 | 15 | 1600 | 3000 | > 80 | 24° | No | White |
| STR4866WW/BK | 240/50 | 15 | 1600 | 3000 | > 80 | 24° | No | Black |
| STR4866CW/WH | 240/50 | 15 | 1600 | 4000 | > 80 | 24° | No | White |
| STR4866CW/BK | 240/50 | 15 | 1600 | 4000 | > 80 | 24° | No | Black |



LED GU10 SPOT II STR4863GU - 5W

5 watt GU10 Architectural
single circuit track spots

Application


Ideal for decorative retail and
interior residential spaces

Design Specifications

- Aluminium body profile
- Powder coat finish in white or black
- GU10 lamp base, 3000K/4000K/6000K, CRI >80
- GU10L350 lamp included, beam distribution 38°
- 350° rotatable (horizontal), 120° vertical
- Lamp options: GU10L550, GU10LR750, GULA750 (trailing edge dimmable)



Dimensions



Performance

Dimmable Driver - Optional
Dimmer type - Trailing edge dimmable
lamp GU10LA750



Technical Specifications

| Model No. | Input (V)/(Hz) | Power (W) | Lumen (lm) | CCT (K) | CRI | Beam Angle | Dimmable | Fitting Colour |
|--------------|----------------|-----------|------------|----------------|------|------------|----------|----------------|
| STR4863GU WH | 240/50 | 5 | 350 | 3000/4000/6000 | > 80 | 38° | Optional | White |
| STR4863GU BK | 240/50 | 5 | 350 | 3000/4000/6000 | > 80 | 38° | Optional | Black |

For terms and conditions of catalogue data use, refer to INDEX

TC SELECTABLE COLOUR

WARM WHITE
2700K

COOL WHITE
4000K

DAYLIGHT
6000K



2700K



3000K



4000K



5000K



6000K

COLOUR TEMPERATURE, THERE IS A DIFFERENCE

Lighting is more than just brightness or lumens. Make sure you take the time to select the right colour temperature to create the best visual appearance; your eyes don't tell lies!



THREE CIRCUIT TRACK STR4890

Universal track - three circuit

Application


Track components

Design Specifications

- Extruded aluminium profile
- Power coat finish in black or white
- Profile length choices 1m or 2m
- Complete with one end cap
- Rating: TOTAL current capacity PER TRACK 16A



Dimensions



Track Components

Mini Joiner



| Model No. | Colour |
|------------|--------|
| STR4891 WH | White |
| STR4891 BK | Black |

Live End



| Model No. | Colour |
|------------|--------|
| STR4892 WH | White |
| STR4892 BK | Black |

Straight Connector



| Model No. | Colour |
|------------|--------|
| STR4893 WH | White |
| STR4893 BK | Black |

L-shaped Connector



| Model No. | Colour |
|------------|--------|
| STR4894 WH | White |
| STR4894 BK | Black |

T-shaped Connector



| Model No. | Colour |
|------------|--------|
| STR4895 WH | White |
| STR4895 BK | Black |

Cross Shaped Connector



| Model No. | Colour |
|------------|--------|
| STR4896 WH | White |
| STR4896 BK | Black |

Adjustable Connector



| Model No. | Colour |
|------------|--------|
| STR4897 WH | White |
| STR4897 BK | Black |

Circuits Adaptor



| Model No. | Colour |
|------------|--------|
| STR4898 WH | White |
| STR4898 BK | Black |


T-bar Mounting Kit



| Model No. | Colour |
|--------------|--------|
| STR4899/1 WH | White |
| STR4899/1 BK | Black |

Suspension Unit with Rod

(M6 x 1000 mm threaded rod)



| Model No. | Colour |
|--------------|--------|
| STR4899/2 WH | White |
| STR4899/2 BK | Black |

Suspension Unit with Wire

(Ø1.5 mm x 1500 mm wire)




| Model No. | Colour |
|--------------|--------|
| STR4899/3 WH | White |
| STR4899/3 BK | Black |

For terms and conditions of catalogue data use, refer to INDEX



THREE CIRCUIT TRACK DIAGRAM

Track has a raised spline running along one side and track components all have an arrow on one side. To assemble, insert each component into the track so that the arrow is on the same side as the raised spline.

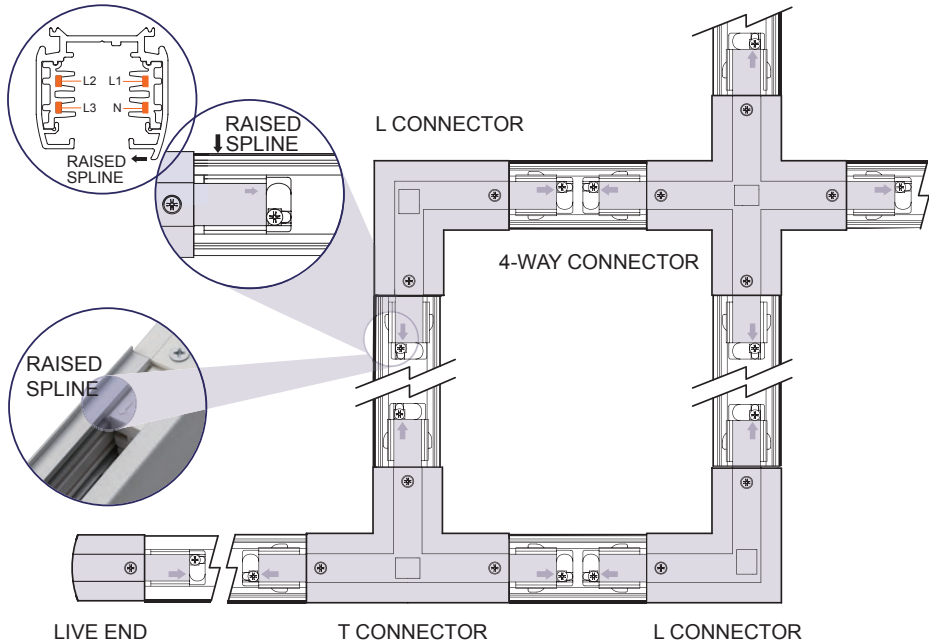

Technical Specifications

| Model No. | Length | Colour |
|--------------|--------|--------|
| STR4890/1 WH | 1 m | White |
| STR4890/1 BK | 1 m | Black |
| STR4890/2 WH | 2 m | White |
| STR4890/2 BK | 2 m | Black |





SPOCK STR4886 - 30W

30 watt three circuit LED rotatable track light

Application

Designed for decorative and creative retail applications


Design Specifications

- Aluminium profile, 350° rotatable (horizontal), 90° (vertical)
- Quality powder coated finish, white or black
- Clear tempered glass cover
- High efficiency COB LED chip, beam angle 24° standard, 45° optional
- High performance multi-reflector system, CRI> 80, CCT 3000K
- Integral constant current non-dimmable LED driver



350° Rotatable

Dimensions




Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270 —

STR4886WW at 3000K



Technical Specifications

| Model No. | Input (V)/(Hz) | Power (W) | Lumen (lm) | CCT (K) | CRI | Beam Angle | Dimmable | Fitting Colour |
|--------------|----------------|-----------|------------|---------|------|------------|----------|----------------|
| STR4886WW/WH | 240/50 | 30 | 2600 | 3000 | > 80 | 24° | No | White |
| STR4886WW/BK | 240/50 | 30 | 2600 | 3000 | > 80 | 24° | No | Black |

For terms and conditions of catalogue data use, refer to INDEX



SPOT IV STR3/4863GU - 5W

5 watt GU10 three circuit LED rotatable track light

Application

Designed for decorative residential and retail applications


Design Specifications

- Aluminium profile, 350° horizontal rotation, 120° vertical rotation
- Quality white or black powder coated finish
- GU10 lamp base, CCT 3000K/4000K/6000K
- GU10L350 lamp included, beam distribution 38°
- Lamp options GU10L550, GU10LR750, GU10LA750 (trailing edge dimmable)



350° Rotatable

Dimensions

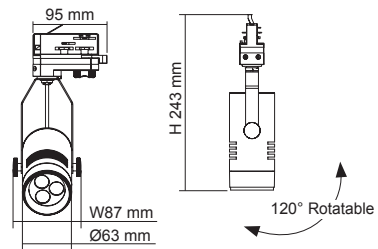

Performance


Dimmable Driver - Optional
Dimmer Type - Trailing edge dimmable lamp GU10LA750



Photometric Data

Unit: cd C0/C180 — C90/C270 —

STR3/4863GU at 3000K



Technical Specifications

| Model No. | Input (V)/(Hz) | Power (W) | Lumen (lm) | CCT (K) | CRI | Beam Angle | Dimmable | Fitting Colour |
|----------------|----------------|-----------|------------|----------------|------|------------|----------|----------------|
| STR3/4863GU WH | 240/50 | 5 | 350 | 3000/4000/6000 | > 80 | 38° | Optional | White |
| STR3/4863GU BK | 240/50 | 5 | 350 | 3000/4000/6000 | > 80 | 38° | Optional | Black |

SAL **PIXIE PLUS** CONTROL YOUR HOME LIGHTING FROM ANYWHERE IN THE WORLD





UNITREK STR3/9017 - 15W

15 watt architectural track spot
- Unitrek three circuit

Application


Ideal for decorative interior and retail designs

Design Specifications

- Architectural cylindrical profile, 350° rotation
- Aluminium body profile, colour matt white or black
- High efficiency COB LED chip, CRI >80, CCT 3000K/5000K
- Changeable multi-faceted reflector system, standard beam distribution 40°, optional 25° & 60°
- 15 watt integral non-dimmable LED driver



Dimensions




Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270 —

STR3/9017/15W/WW at 3000K



Technical Specifications

| Model No. | Input (V)/(Hz) | Power (W) | Lumen (lm) | CCT (K) | CRI | Beam Angle | Dimmable | Fitting Colour | Dimension (Ø x H mm) |
|----------------------|----------------|-----------|------------|---------|------|------------|----------|----------------|----------------------|
| STR3/9017/15W/WW/WH | 240/50 | 15 | 1200 | 3000 | > 80 | 40° | No | White | Ø 65 x 175 |
| STR3/9017/15W/WW/BK | 240/50 | 15 | 1200 | 3000 | > 80 | 40° | No | Black | Ø 65 x 175 |
| STR3/9017/15W/NDL/WH | 240/50 | 15 | 1300 | 5000 | > 80 | 40° | No | White | Ø 65 x 175 |
| STR3/9017/15W/NDL/BK | 240/50 | 15 | 1300 | 5000 | > 80 | 40° | No | Black | Ø 65 x 175 |

For terms and conditions of catalogue data use, refer to INDEX





LED TRACK LIGHT STR4884 - 22W

Decorative three circuit rotatable
22 watt LED track light

Application

Designed for decorative,
retail and commercial applications


Design Specifications

- Extruded aluminium profile, horizontal 350° rotatable, 90° vertical
- Quality white or black powder coated finish
- High output COB LED chip, CRI >80, CCT 3000K
- Beam angle 38° standard, 12° or 24° optional
- Integral constant current non-dimmable 22 watt LED driver



350° Rotatable

Dimensions

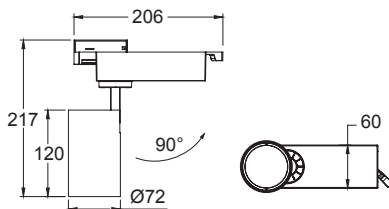


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C30/C210 —
cd C60/C240 — C90/C270 —

STR4884WW at 3000K



Technical Specifications

| Model No. | Input (V)/(Hz) | Power (W) | Lumen (lm) | CCT (K) | CRI | Beam Angle | Dimmable | Fitting Colour |
|--------------|----------------|-----------|------------|---------|------|------------|----------|----------------|
| STR4884WW/WH | 240/50 | 22 | 1900 | 3000 | > 80 | 38° | No | White |
| STR4884WW/BK | 240/50 | 22 | 1900 | 3000 | > 80 | 38° | No | Black |

For terms and conditions of catalogue data use, refer to INDEX



LED TRACK LIGHT STR4885 - 30W

Decorative three circuit rotatable
30 watt LED track light

Application

Designed for decorative,
retail and commercial applications


Design Specifications

- Extruded aluminium profile, horizontal 350° rotatable, 90° vertical
- Quality white or black powder coated finish
- High output COB LED chip, CRI >80, CCT 3000K
- Beam angle 38° standard, 12° or 24° optional
- Integral constant current non-dimmable 30 watt LED driver



350° Rotatable

Dimensions

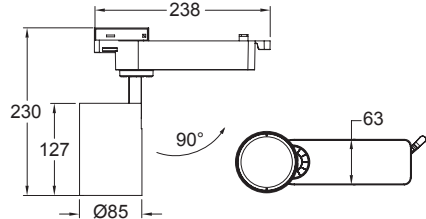


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C30/C210 —
cd C60/C240 — C90/C270 —

STR4885WW at 3000K



Technical Specifications

| Model No. | Input (V)/(Hz) | Power (W) | Lumen (lm) | CCT (K) | CRI | Beam Angle | Dimmable | Fitting Colour |
|--------------|----------------|-----------|------------|---------|------|------------|----------|----------------|
| STR4885WW/WH | 240/50 | 30 | 2600 | 3000 | > 80 | 38° | No | White |
| STR4885WW/BK | 240/50 | 30 | 2600 | 3000 | > 80 | 38° | No | Black |

For terms and conditions of catalogue data use, refer to INDEX