



SMARTER LIGHTING CHOICES

SINCE 1998



INTERIOR LIGHTING



EXTERIOR LIGHTING



SMART LIGHTING
CONTROLS



LED BULKHEADS

A robust range of commercial and industrial LED bulkheads.

P344 REC-BUNKER SE7087L



P345 BRONX SE7089



P346 MEMPHIS SL9719SQ



P347 MEMPHIS SL9719RD



P348 BUNKER 15 OVAL SL7271




P349 BUNKER 15 SENSOR SL7271



P350 BUNKER 15 ROUND SL7272



P351 BUNKER 15 SENSOR SL7271



Lighting products have thermal design limits. As outlined in the mandatory Safety Standard AS/NZS60598, lighting products are designed to maximum operating thermal limits (ta rating) to ensure the products operated safely within the applied installation. Look out for these operating limits (ta) in all professional installation instructions and the relevant SAL product web page.

Need more information on product thermal performance? Check out the SAL web FAQ's or speak to your local SAL team member.





REC-BUNKER SE7087L - 18W

IP54 LED bunker ceiling mount luminaire, IK10 rated

Application


A reliable solution for commercial utility spaces

Design Specifications

- Robust die-cast aluminium body
- Durable white powder coat finish
- Stainless steel allen screws
- High efficiency SMD LED chips, beam distribution 90°
- Integral constant current non-dimmable LED driver
- UV stabilised opal polycarbonate diffuser
- Designed with silicone gasket



Dimensions




Performance

Dimmable Driver - Optional
Dimmer Type - Trailing Edge

Photometric Data

Unit: cd C0/C180 — C90/C270

SE7087L at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
SE7087L	240/50	18	1450	4000	> 80	90°	Optional	White

For terms and conditions of catalogue data use, refer to INDEX



BRONX SE7089 - 55W

IP65 LED wall mount luminaire,
IK10 rated

Application


A robust solution for commercial exterior spaces and security

Design Specifications

- Die-cast aluminium body
- Durable black powder coat finish
- UV stabilised opal polycarbonate diffuser
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver, pre-wired with 450mm of 3 x core rubber flex



Dimensions

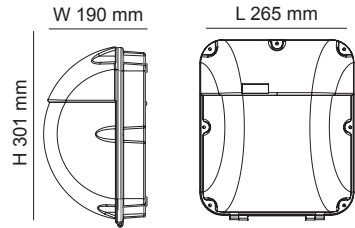


Performance

Dimmable Driver - No
In Built Sensor - Optional
Sensor Type - Microwave

Photometric Data

Unit: cd C0/C180 — C90/C270 —

SE7089BK at 5000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
SE7089BK	240/50	55	4500	5000	> 70	No	Black



MEMPHIS SQUARE SL9719SQ - 22W

IP65 LED square surface mount luminaire,
IK10 rated

Application


A robust solution for industrial
and commercial spaces

Design Specifications

- Die-cast aluminium body
- Frosted polycarbonate diffuser, silicone gasket
- Stainless steel allen screws
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver
- Designed with multi access rear or side conduit entry points
- Product selections compliant to AS/NZS2293
Emergency Lighting & Exit Signs are located in the exterior emergency section of this catalogue



Dimensions

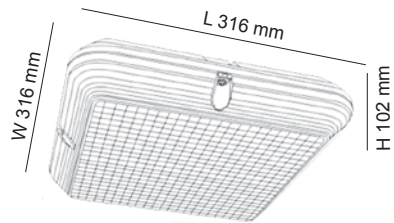

Performance


Dimmable Driver - Optional
Dimmer Type - Trailing edge, 1-10V, DALI / DSI
In Built Sensor - Optional
Sensor Type - Microwave



Photometric Data

Unit: cd C0/C180 _____ C90/C270 _____

SL9719SQ at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
SL9719SQ	240/50	22	1700	4000	> 80	Optional	White

For terms and conditions of catalogue data use, refer to INDEX



MEMPHIS ROUND SL9719RD - 22W

IP65 LED round surface mount luminaire, IK10 rated

Application


A robust solution for industrial and commercial spaces

Design Specifications

- Die-cast aluminium body
- Frosted polycarbonate diffuser, silicone gasket
- Stainless steel allen screws
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver
- Designed with multi access rear or side conduit entry points
- Product selections compliant to AS/NZS2293 Emergency Lighting & Exit Signs are located in the exterior emergency section of this catalogue.



Dimensions

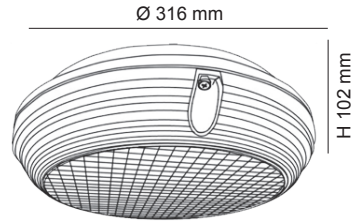

Performance


- Dimmable Driver - Optional
- Dimmer Type - Trailing edge
- In Built Sensor - Optional
- Sensor Type - Microwave



Photometric Data

Unit: cd C0/C180 — C90/C270

SL9719RD at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
SL9719RD	240/50	22	1700	4000	> 80	Optional	White



BUNKER 15 OVAL SL7271 - 15W

LED 15 watt surface mount oval shaped bunker, IP65

Application


A robust solution for residential and apartment interior or exterior utility spaces

Design Specifications

- Durable white or black polycarbonate body, opal polycarbonate diffuser
- Integral control gear, 15 watt
- CRI >80, 1050lm
- Quick connect installation design
- Robust IK08 protection



Dimensions

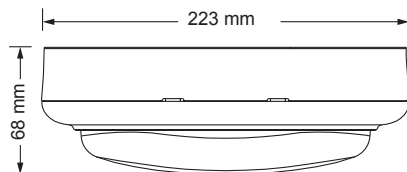


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270

SL7271CW/WH at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL7271CW/WH	240/50	15	1050	4000	> 80	110°	White	223 x 133 x 68
SL7271CW/BK	240/50	15	1050	4000	> 80	110°	Black	223 x 133 x 68

For terms and conditions of catalogue data use, refer to INDEX



BUNKER 15 OVAL SENSOR SL7271 - 15W

LED 15 watt surface mount oval shaped bunker, IP54 with PIR sensor

Application


A robust solution for residential and apartment interior or exterior utility spaces

Design Specifications

- Durable white or black polycarbonate body, opal polycarbonate diffuser
- Integral control gear, 15 watt with PIR sensor control, fixed 30 seconds ON, Max. 7 metres detection distance
- CRI >80, 1050lm
- Quick connect installation design
- Robust IK08 protection



Dimensions

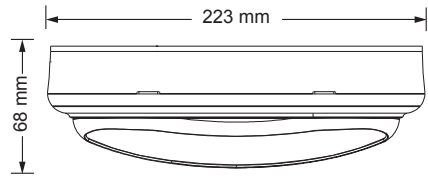


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270

SL7271CW/WH/S at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL7271CW/WH/S	240/50	15	1050	4000	> 80	110°	White	223 x 133 x 68
SL7271CW/BK/S	240/50	15	1050	4000	> 80	110°	Black	223 x 133 x 68

For terms and conditions of catalogue data use, refer to INDEX



BUNKER 15 ROUND SL7272 - 15W

LED 15 watt surface mount round shaped bunker, IP65

Application


A robust solution for residential and apartment interior or exterior utility spaces

Design Specifications

- Durable white or black polycarbonate body, opal polycarbonate diffuser
- Integral control gear, 15 watt
- CRI >80, 1050lm
- Quick connect installation design
- Robust IK08 protection



Dimensions

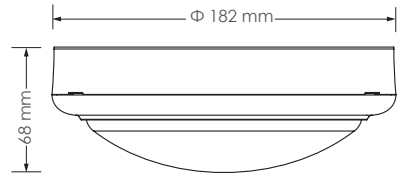


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270

SL7272CW/WH at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SL7272CW/WH	240/50	15	1050	4000	> 80	110°	White	Φ 182 x 68
SL7272CW/BK	240/50	15	1050	4000	> 80	110°	Black	Φ 182 x 68

For terms and conditions of catalogue data use, refer to INDEX



BUNKER 15 ROUND SENSOR SL7272 - 15W

LED 15 watt surface mount round shaped bunker, IP54 with PIR sensor

Application


A robust solution for residential and apartment interior or exterior utility spaces

Design Specifications

- Durable white or black polycarbonate body, opal polycarbonate diffuser
- Integral control gear, 15 watt with PIR sensor control, fixed 30 seconds ON
- Max. 7 metres detection distance
- CRI >80, 1050lm
- Quick connect installation design
- Robust IK08 protection



Dimensions

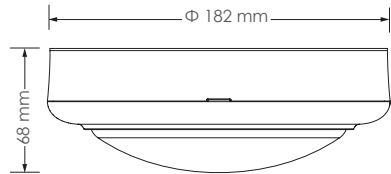


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270

SL7272CW/WH/S at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SL7272CW/WH/S	240/50	15	1050	4000	> 80	110°	White	Φ 182 x 68
SL7272CW/BK/S	240/50	15	1050	4000	> 80	110°	Black	Φ 182 x 68