



SMARTER LIGHTING CHOICES

SINCE 1998



INTERIOR LIGHTING



EXTERIOR LIGHTING




SMART LIGHTING
CONTROLS




LED EXTERIOR EMERGENCY

A versatile range of
LED exterior emergency
luminaires compliant
to AS/NZS 2293



The difference between Non-maintained and Maintained Emergency Lighting ? Non-Maintained lighting products are luminaires designed solely for emergency use and will only operate in an event where the mains supply power is interrupted. Maintained Emergency Lighting products are designed to be illuminated at all times, including an emergency event where the power is interrupted. Under both systems, the products must remain illuminated for a minimum period of 90 minutes in accordance with AS/NZS2293 Emergency Lighting requirements.

Need more information on Emergency Lighting requirements? Check out the SAL web FAQ's or speak to your local SAL team member.





KEW SL9721/EM - 20W/35W

IP65 LED weatherproof batten
20/35 watt selectable power

Application

Multi-purpose commercial or industrial utility applications

Design Specifications

- Rounded shape vandal proof design, robust polycarbonate body and UV stabilized polycarbonate diffuser
- Stainless steel clips and screws, IP65 and IK08 rated, sensor and emergency options
- Operating temperature +40°C
- Integral constant current non-dimmable LED driver
- Variable wattage DIP switch, 100%, 75% or 50% setting available
- Compliant to AS/NZS2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO4 battery technology

Performance

Dimmable Driver - No



Technical Specifications

Model No.	Input (V)/(Hz)	Maintained Power (W)	Emergency Classification	Battery Type	CCT (K)	Dimensions (L x W x H mm)
SL9721/20EM	240/50	Max. 20	D32@C0, D20@C90	IFR26650 3.2V 3200mAh	3000/5000	618 x 116 x 74
SL9721/35EM	240/50	Max. 35	D40@C0, D25@C90		3000/5000	1218 x 116 x 74




SL9721/20EM



SL9721/35EM

Dimensions




Photometric Data (at maintained power)

Unit: cd C0/C180 — C90/C270 —

SL9721/20W WW at 3000K

SL9721/35W DL at 5000K

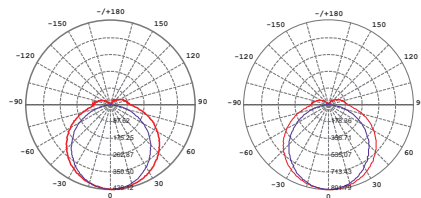



Surface/suspended mounting clips to maintain IP rating




Surface mounting bracket



Suspension bracket



Stainless steel clips can be fastened with extra locking screws for security



Variable wattage DIP switch

Accessories Included

- Allen key & screws
- PVC cable glands
- Suspension brackets

Installation type

- Surface mounted
- Suspended
(Suspension kit is required)



TC SELECTABLE

SOL SL9726 TC/EM - 20W/42W

IP65 LED weatherproof batten with selectable colour

Application

Commercial or industrial utility applications requiring IP65 and IK08 performance

Design Specifications

- Colour temperature selectable by DIP switch, 3000/4000/6000K
- Rounded shape vandal proof design, robust polycarbonate body and UV stabilized polycarbonate diffuser
- Stainless steel clips & screws
- Integral constant current non-dimmable LED driver
- Compliant to AS/NZS2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO4 battery technology

Performance

Dimmable Driver - No
Suspension Kits - Optional



Technical Specifications

Model No.	Input (V)/(Hz)	Maintained Power (W)	Emergency Classification	Battery Type	Lumens at Maint. PWR	Dimensions (L x W x H mm)
SL9726/20TC/EM	240/50	Max.20	D32@C0, D20@C90	IFR26650 3.2V 3200mAh	1800lm	642 x 118 x 77
SL9726/40TC/EM	240/50	Max.42	D40@C0, D20@C90		3600lm	1215 x 118 x 77


SL9726/20TC/EM



SL9726/40TC/EM




Dimensions

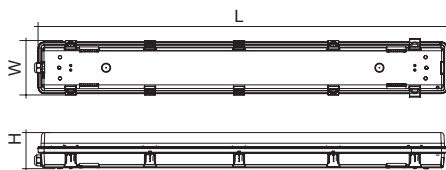


Photometric Data (at maintained power)

Unit: cd C0/C180 C30/C210
cd C60/C240 C90/C270

SL9726/20TC/EM at 3000K



SL9726/40TC/EM at 4000K



For terms and conditions of catalogue data use, refer to INDEX



SAL EMERGENCY WE'VE GOT YOU COVERED

The comprehensive range of SAL Emergency LED lighting products cover all your emergency needs; exits, luminaires and more.



MEMPHIS SQUARE SL9719SQ - 22W

IP65 LED square surface mount luminaire,
IK10 rated

Application


A robust solution for industrial
and commercial spaces

Design Specifications

- Die-cast aluminium body
- Frosted polycarbonate diffuser, silicone gasket
- Stainless steel allen screws
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver
- Compliant to AS/NZS2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO4 battery technology Emergency spacing classification D32



Dimensions

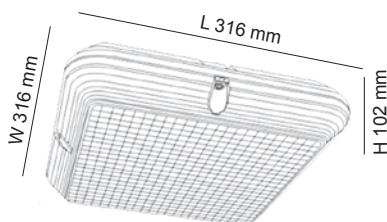


Performance

Dimmable Driver - Optional

Photometric Data (at maintained power)

Unit: cd C0/C180 — C90/C270 —

SL9719SQ at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Maintained Power (W)	Emergency Classification	Battery Type	Lumens at Maint. PWR	CCT (K)
SL9719SQ/EM	240/50	22	D32@C0, D32@C90	IFR26650 3.2V 3200mAh	1700lm	4000

For terms and conditions of catalogue data use, refer to INDEX



MEMPHIS ROUND SL9719RD - 22W

IP65 LED round surface mount luminaire,
IK10 rated

Application


A robust solution for industrial
and commercial spaces

Design Specifications

- Die-cast aluminium body
- Frosted polycarbonate diffuser, silicone gasket
- Stainless steel allen screws
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver
- Compliant to AS/NZS2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO4 battery technology Emergency spacing classification D32



Dimensions




Performance

Dimmable Driver - Optional

Photometric Data (at maintained power)

Unit: cd C0/C180 — C90/C270 —

SL9719RD at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Maintained Power (W)	Emergency Classification	Battery Type	Lumens at Maint. PWR	CCT (K)
SL9719RD/EM	240/50	22	D32@C0, D32@C90	IFR26650 3.2V 3200mAh	1700lm	4000



COOPER SE7083L - 23W

23 watt, IP65 LED commercial
bunker luminaire, IK10 rated

Application

A decorative architectural
solution for commercial exteriors

Design Specifications

- Robust die-cast aluminium body, UV stabilised opal polycarbonate diffuser
- Durable black or silver powder coated finish
- Stainless steel allen screws
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver
- Compliant to AS/NZS2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO4 battery technology
- Emergency spacing classification D25

Performance

Dimmable Driver - Optional




Technical Specifications

Model No.	Input (V)/(Hz)	Maintained Power (W)	Emergency Classification	Battery Type	Lumens at Maint. PWR	CCT (K)
SE7083L/EM/WW/SL	240/50	23	D25	IFR26650 3.2V 3200mAh	1400lm	3000
SE7083L/EM/DL/SL	240/50	23	D25		1500lm	6000
SE7083L/EM/WW/BK	240/50	23	D25		1400lm	3000
SE7083L/EM/DL/BK	240/50	23	D25		1500lm	6000




Dimensions



Photometric Data (at maintained power)

Unit: cd C0/C180 — C90/C270 —

SE7083L/EM/WW at 3000K





COOPER SE7084L - 23W

23 watt, IP65 LED commercial
bunker luminaire, IK10 rated

Application

A decorative architectural
solution for commercial exteriors

Design Specifications

- Robust die-cast aluminium body, UV stabilised opal polycarbonate diffuser
- Durable black or silver powder coated finish
- Stainless steel allen screws
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver
- Compliant to AS/NZS2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO4 battery technology
- Emergency spacing classification D20

Performance

Dimmable Driver - Optional




Technical Specifications

Model No.	Input (V)/(Hz)	Maintained Power (W)	Emergency Classification	Battery Type	Lumens at Maint. PWR	CCT (K)
SE7084L/EM/WW/SL	240/50	23	D20	IFR26650 3.2V 3200mAh	1400lm	3000
SE7084L/EM/DL/SL	240/50	23	D20		1500lm	6000
SE7084L/EM/WW/BK	240/50	23	D20		1400lm	3000
SE7084L/EM/DL/BK	240/50	23	D20		1500lm	6000



Dimensions



Photometric Data (at maintained power)

Unit: cd C0/C180 — C90/C270 —

SE7084L/EM/WW at 3000K

