



**SINCE 1998**

# **SMARTER LIGHTING CHOICES**

**SINCE 1998**






## LED EXTERIOR ARCHITECTURAL

A creative selection of exterior LED architectural wall, bollard and post top luminaires, ideal for residential and commercial spaces.





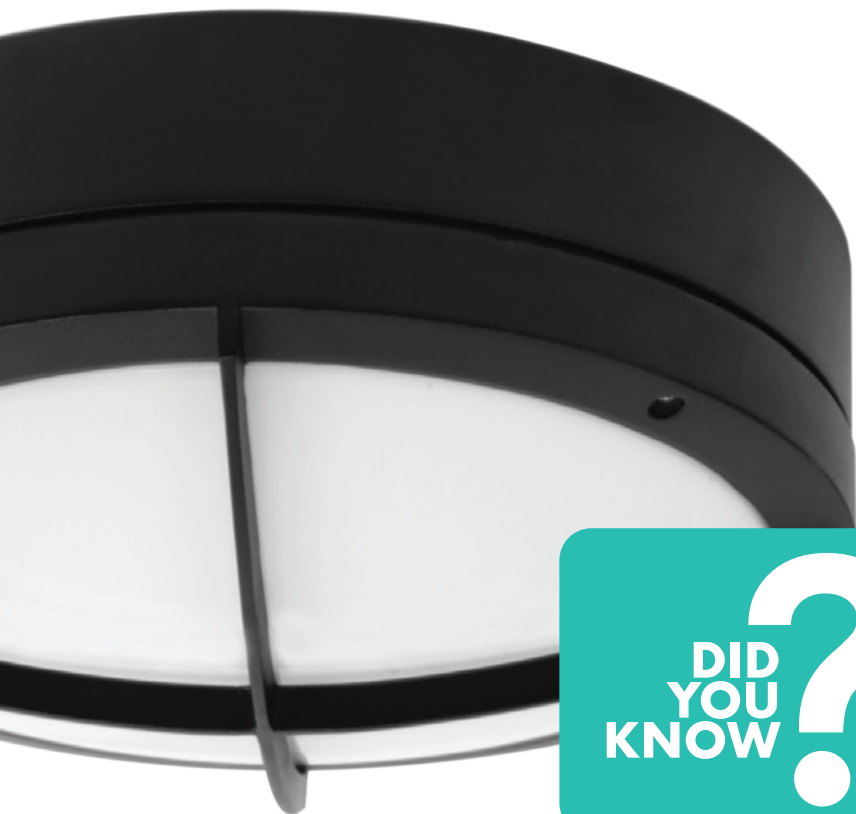

**DID  
YOU  
KNOW?**

Why is the IP rating important? In brief, IP (Ingress Protection) ratings are defined in EN 60529 and simply defines the ability of an electrical product to seal and protect against the intrusion of foreign objects and water.

(I) As the first numeral stands for intrusion of a foreign object, where (P) as the second numeral stands for the penetration of moisture.

As a guide IP20 rated products would be seen in interior spaces with no requirement for protection against the elements, where an IP65 product would be found in an exterior application which required substantial protection against the elements.

*Need more information on IP ratings? Check out the SAL web FAQ's or speak to your local SAL team member.*





## COOPER III SE7191 TC - 12W

Decorative 12 watt round profile IP65 architectural LED wall mount luminaire

### Application


A decorative architectural solution for residential & commercial interior or exterior spaces

### Design Specifications

- Convenient TC selectable colour temperature, 3000K/4000K/5700K
- Stylish black finish
- Integral non-dimmable control gear, 12 watt
- Robust PC body profile and diffuser
- High efficiency SMD LED



### Dimensions




### Performance

Dimmable Driver - No

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

SE7191TC/BK at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SE7191TC/BK	240/50	12	1050/1150/1100	3000/4000/5700	> 80	Black	Ø200 x H60

For terms and conditions of catalogue data use, refer to INDEX

## COOPER III SE7192 TC - 18W

Decorative 18 watt round profile IP65 architectural LED wall mount luminaire

### Application

A decorative architectural solution for residential & commercial interior or exterior spaces

### Design Specifications

- Convenient TC selectable colour temperature, 3000K/4000K/5700K
- Stylish black finish
- Integral non-dimmable control gear, 18 watt
- Robust PC body profile and diffuser
- High efficiency SMD LED
- Stylish optional eyelid cover only to order, code SE7192TC/BK/P
- SE7192TC/BK/EM, compliant to AS/NZS 2293 Emergency Lighting & Exit Signs with a guaranteed minimum 90 minutes emergency mode function and LiFePO4 battery technology.

### Performance

Dimmable Driver - No




### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SE7192TC/BK	240/50	18	1600/1800/1750	3000/4000/5700	> 80	Black	Ø275 x H60
SE7192TC/BK/EM	240/50	18	1600/1800/1750	3000/4000/5700	> 80	Black	Ø275 x H60




### Dimensions



### Photometric Data

Unit: cd C0/C180 C90/C270

SE7192TC/BK at 3000K



## COOPER II SE7181 TC - 12W

Decorative 12 watt round profile IP65 architectural LED wall mount luminaire

### Application

A decorative architectural solution for residential & commercial interior or exterior spaces

### Design Specifications


- Convenient TC selectable colour temperature, 3000K/4000K/5700K
- Durable black powder coated finish
- Integral non-dimmable control gear, 12 watt
- Robust die-cast aluminium body profile
- High efficiency SMD LED

### Performance

Dimmable Driver - No




### Dimensions



### Photometric Data

Unit: cd C0/C180 — C90/C270 —

SE7181TC/BK at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SE7181TC/BK	240/50	12	1000/1200/1100	3000/4000/5700	> 80	Black	Ø 250 x 58

For terms and conditions of catalogue data use, refer to INDEX

## COOPER II SE7182 TC - 12W

Decorative 12 watt round profile IP65 architectural LED wall mount luminaire

### Application


A decorative architectural solution for residential & commercial interior or exterior spaces

### Design Specifications

- Stylish eyelid design
- Convenient TC selectable colour temperature, 3000K/4000K/5700K
- Durable black powder coated finish
- Integral non-dimmable control gear, 12 watt
- Robust die-cast aluminium body profile
- High efficiency SMD LED



### Dimensions

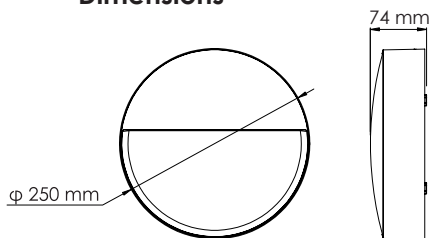


### Performance

Dimmable Driver - No

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

SE7182TC/BK at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SE7182TC/BK	240/50	12	900/1100/1000	3000/4000/5700	> 80	Black	Ø 250 x 74

For terms and conditions of catalogue data use, refer to INDEX



## COOPER SE7081L, SE7082L - 16W

16 watt, IP65 LED commercial  
bunker luminaire, IK10 rated

### Application

A decorative architectural solution  
for commercial exteriors

### Design Specifications

- Robust die-cast aluminium body
- Durable black or silver powder coat finish
- Stainless steel allen screws
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver
- UV stabilised opal polycarbonate diffuser

### Performance

Sensor - Optional microwave  
Dimming Optional - Trailing edge



### Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SE7081L SL WW	240/50	16	1100	3000	> 80	Silver
SE7081L SL DL	240/50	16	1100	6000	> 80	Silver
SE7081L BK WW	240/50	16	1100	3000	> 80	Black
SE7081L BK DL	240/50	16	1100	6000	> 80	Black
SE7082L SL WW	240/50	16	1000	3000	> 80	Silver
SE7082L SL DL	240/50	16	1000	6000	> 80	Silver
SE7082L BK WW	240/50	16	1000	3000	> 80	Black
SE7082L BK DL	240/50	16	1000	6000	> 80	Black



SE7081L

SE7082L

### Dimensions

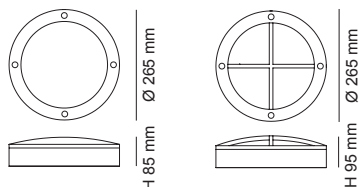


### Photometric Data

Unit: cd C0/C180 — C90/C270

SE7081L SL WW at 3000K

SE7082L SL WW at 3000K

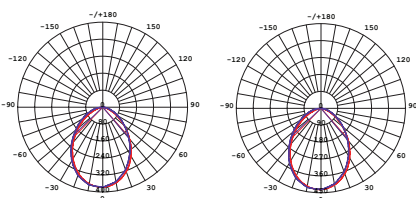

## COOPER SE7083L, SE7084L - 23W

23 watt, IP65 LED commercial  
bunker luminaire, IK10 rated

### Application

A decorative architectural solution  
for commercial exteriors

### Design Specifications

- Robust die-cast aluminium body
- Durable black or silver powder coat finish
- Stainless steel allen screws
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver
- UV stabilised opal polycarbonate diffuser

### Performance

Sensor - Optional microwave  
Dimming Optional - Trailing edge  
Emergency - Optional



### Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SE7083L SL WW	240/50	23	1400	3000	> 80	Silver
SE7083L SL DL	240/50	23	1500	6000	> 80	Silver
SE7083L BK WW	240/50	23	1400	3000	> 80	Black
SE7083L BK DL	240/50	23	1500	6000	> 80	Black
SE7084L SL WW	240/50	23	1300	3000	> 80	Silver
SE7084L SL DL	240/50	23	1400	6000	> 80	Silver
SE7084L BK WW	240/50	23	1300	3000	> 80	Black
SE7084L BK DL	240/50	23	1400	6000	> 80	Black



SE7083L

SE7084L

### Dimensions

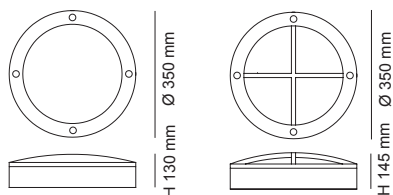


### Photometric Data

Unit: cd C0/C180 — C90/C270

SE7083L SL WW at 3000K

SE7084L SL WW at 3000K

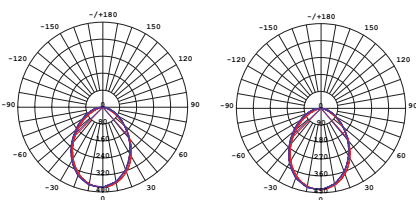

## ROUND SE7063 - 8W

Decorative round profile IP65 architectural LED wall mount luminaire

### Application

A decorative architectural solution for residential & commercial interior or exterior spaces

### Design Specifications

- Colour temperature 3000K
- Durable black or stylish silver powder coated finish
- Integral non-dimmable control gear, 8 watt
- Robust die-cast aluminium body profile
- High efficiency SMD LED, CRI >80

### Performance

Dimmable Driver - No




### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SE7063WW/BK	240/50	8	600	3000	> 80	Black
SE7063WW/SL	240/50	8	600	3000	> 80	Silver




### Dimensions



### Photometric Data

Unit: cd C0/C180 C30/C210  
C60/C240 C90/C270

#### SE7063WW at 3000K



## SQUARE SE7064 - 8W

Decorative square profile IP65 architectural LED wall mount luminaire

### Application

A decorative architectural solution for residential & commercial interior or exterior spaces

### Design Specifications

- Colour temperature 3000K
- Durable black or stylish silver powder coated finish
- Integral non-dimmable control gear, 8 watt
- Robust die-cast aluminium body profile
- High efficiency SMD LED, CRI >80

### Performance

Dimmable Driver - No




### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SE7064WW/BK	240/50	8	600	3000	> 80	Black
SE7064WW/SL	240/50	8	600	3000	> 80	Silver




### Dimensions



### Photometric Data

Unit: cd C0/C180 C30/C210  
C60/C240 C90/C270

SE7064WW at 3000K



## MOD SE7013

Decorative IP44 architectural LED wall mount luminaire - E27 lamp base

### Application

A decorative architectural solution for commercial exteriors

### Design Specifications

- Stainless steel face panel
- Powder coated finish (SE7013 BK)
- Opal acrylic diffuser
- E27 lamp base
- Lamp NOT included
- Lamp options - LG5, LG9, LGS4, LGS8, LGS10, LGS14D, LT407, LT409

### Performance

Dimmable - Refer lamp selection




SE7013 BK



SE7013 SLS

### Dimensions



### Technical Specifications

Model No.	Input (V)/(Hz)	Fitting Colour	Lamp Base	Dimension (D x H mm)
SE7013 BK	240/50	Black	E27	Ø 270 x 73
SE7013 SLS	240/50	Stainless Steel	E27	Ø 270 x 73

## BUTTON SL7269 - 6W

6 watt, IP65 LED bunker luminaire

## BUTTON SL7270 - 12W

12 watt, IP65 LED bunker luminaire

### Application

A decorative architectural solution for commercial exteriors

### Design Specifications

- Robust die-cast aluminium body
- Durable powder coated finish, white or black
- Opal polycarbonate diffuser
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver

### Performance

Dimmable Driver - No



SL7269DL WH


SL7270DL WH



SL7269DL BK

SL7270DL BK

### Dimensions

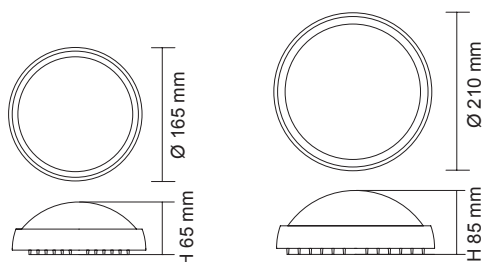

SL7269DL WH  
SL7269DL BK

SL7270DL WH  
SL7270DL BK

### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SL7269DL WH	240/50	6	450	5000	> 80	White
SL7269DL BK	240/50	6	450	5000	> 80	Black
SL7270DL WH	240/50	12	800	5000	> 80	White
SL7270DL BK	240/50	12	800	5000	> 80	Black

For terms and conditions of catalogue data use, refer to INDEX



## ALTONA SE7356 - 5W

LED 5 watt surface mount circular profile wall luminaire


### Application

Residential stairs, walkways and interior commercial features

### Design Specifications

- Durable aluminium body profile
- Quality matt black powder coat finish
- High efficiency SMD LED chips
- CCT 3000K or 5000K
- Beam distribution 70°
- Integral LED control gear

### Dimensions

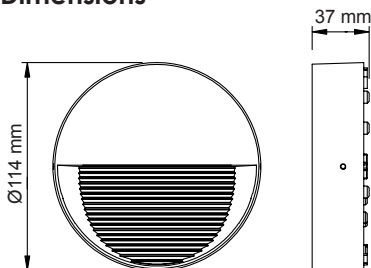


### Performance

Dimmable Driver - No

### Photometric Data

Unit: cd C0/C180 — C90/C270

SE7356WW at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7356WW/BK	240/50	5	150	3000	> 80	70°	Black	Ø114 x 37
SE7356NDL/BK	240/50	5	220	5000	> 80	70°	Black	Ø114 x 37

For terms and conditions of catalogue data use, refer to INDEX

## ALTONA PLUS SE7357 - 8W

LED 8 watt surface mount circular profile wall luminaire


### Application

Residential stairs, walkways and interior commercial features

### Design Specifications

- Durable aluminium body profile
- Quality matt black powder coat finish
- High efficiency SMD LED chips
- CCT 3000K or 5000K
- Beam distribution 70°
- Integral LED control gear

### Dimensions

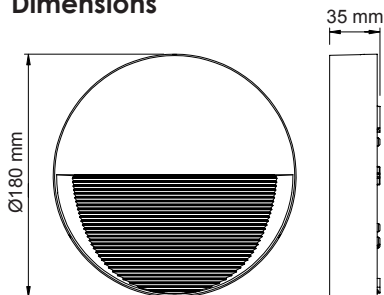


### Performance

Dimmable Driver - No

### Photometric Data

Unit: cd C0/C180 — C90/C270

SE7357WW at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7357WW/BK	240/50	8	350	3000	> 80	70°	Black	Ø180 x 35
SE7357NDL/BK	240/50	8	500	5000	> 80	70°	Black	Ø180 x 35

For terms and conditions of catalogue data use, refer to INDEX

Linked in YouTube



## ALTONA-S PLUS SE7358 - 5W

LED 5 watt surface mount square profile wall luminaire

### Application


Residential stairs, walkways and interior commercial features



### Design Specifications

- Durable aluminium body profile
- Quality matt black powder coat finish
- High efficiency SMD LED chips
- CCT 3000K or 5000K
- Beam distribution 70°
- Integral control gear

### Dimensions

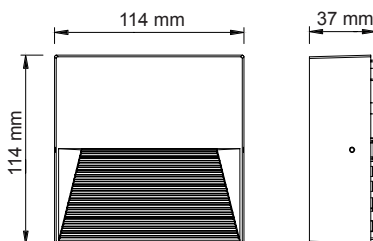


### Performance

Dimmable Driver - No

### Photometric Data

Unit: cd C0/C180 — C90/C270

SE7358WW at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SE7358WW/BK	240/50	5	150	3000	> 80	70°	Black	114 x 114 x 37
SE7358NDL/BK	240/50	5	220	5000	> 80	70°	Black	114 x 114 x 37

For terms and conditions of catalogue data use, refer to INDEX

**NEED A HAND  
PACKING YOUR  
PRODUCT DATA  
SHEETS?**



**GIVE THE SAL  
SHOPPING CART  
A GO.**

visit [www.sal.net.au](http://www.sal.net.au)

## LOUNGE II S9328/150TC - 9W

9 watt decorative IP54 architectural LED wall mount luminaire, with selectable colour temperature

### Application


A decorative architectural solution for residential & commercial interior or exterior space

### Design Specifications

- Convenient TC selectable colour temperature, 3000K/4000K/5000K
- Durable white or black powder coated finish
- Integral non-dimmable control gear
- Robust die-cast aluminium body profile
- High efficiency SMD LED chips
- Indirect illumination optical performance



### Dimensions

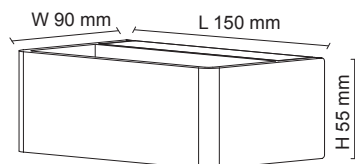


### Performance

Dimmable Driver - No

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9328/150TC at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (L x W x H mm)
S9328/150TC/WH	240/50	9	500/600/550	3000/4000/5000	> 80	White	150 x 90 x 55
S9328/150TC/BK	240/50	9	500/600/550	3000/4000/5000	> 80	Black	150 x 90 x 55

For terms and conditions of catalogue data use, refer to INDEX

## LOUNGE II S9328/220TC - 15W

15 watt decorative IP54 architectural LED wall mount luminaire, with selectable colour temperature

### Application


A decorative architectural solution for residential & commercial interior or exterior spaces

### Design Specifications

- Convenient TC selectable colour temperature, 3000K/4000K/5000K
- Durable white or black powder coated finish
- Integral non-dimmable control gear
- Robust die-cast aluminium body profile
- High efficiency SMD LED chips
- Indirect illumination optical performance



### Dimensions

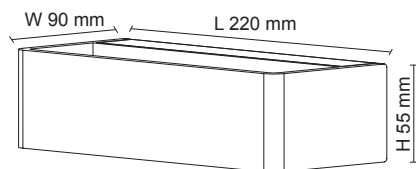


### Performance

Dimmable Driver - No

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9328/220TC at 5000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (L x W x H mm)
S9328/220TC/WH	240/50	15	800/1000/900	3000/4000/5000	> 80	White	220 x 90 x 55
S9328/220TC/BK	240/50	15	800/1000/900	3000/4000/5000	> 80	Black	220 x 90 x 55

For terms and conditions of catalogue data use, refer to INDEX



## LOUNGE III S9327 - 10W/18W

10/18 watt decorative IP54 architectural LED wall mount luminaire

### Application

Ideal for any residential or commercial interior or exterior space

### Design Specifications

- Durable aluminium body profile
- Quality white or black powder coat finish
- High efficiency SMD LED chips
- Indirect illumination optical performance
- Integral constant current non-dimmable driver

### Performance

Dimmable Driver - No

S9327/150 BK

S9327/150 WH


S9327/300 BK

S9327/300 WH

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9327/300WW at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (L x W x H mm)
S9327/150WW/WH	240/50	10	400	3000	> 80	White	150 x 100 x 92
S9327/150WW/BK	240/50	10	400	3000	> 80	Black	150 x 100 x 92
S9327/150NDL/WH	240/50	10	500	5000	> 80	White	150 x 100 x 92
S9327/150NDL/BK	240/50	10	500	5000	> 80	Black	150 x 100 x 92
S9327/300WW/WH	240/50	18	720	3000	> 80	White	300 x 100 x 92
S9327/300WW/BK	240/50	18	720	3000	> 80	Black	300 x 100 x 92
S9327/300NDL/WH	240/50	18	900	5000	> 80	White	300 x 100 x 92
S9327/300NDL/BK	240/50	18	900	5000	> 80	Black	300 x 100 x 92

For terms and conditions of catalogue data use, refer to INDEX

## LOUNGE IV SE7066TC - 9W


9 watt Decorative IP54 architectural  
LED wall mount luminaire

### Application


A decorative architectural solution for residential  
& commercial interior or exterior spaces

### Design Specifications

- Convenient TC selectable colour temperature, 3000K/4000K/5000K
- Quality white or black powder coat finish
- High efficiency SMD LED chips
- Indirect illumination optical performance
- Integral constant current non-dimmable driver

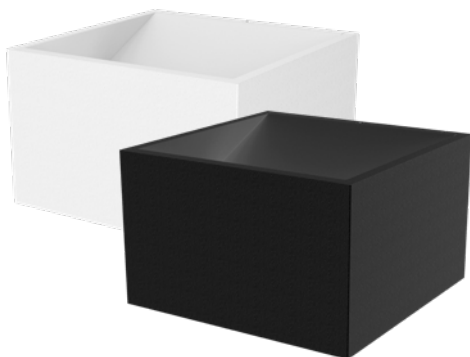

### Dimensions




### Performance

Dimmable Driver - No

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

SE7066TC/WH at 3000K



### Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (L x W x H mm)
SE7066TC/WH	240/50	9	500/600/550	3000/4000/5000	> 80	White	130 x 130 x 80
SE7066TC/BK	240/50	9	500/600/550	3000/4000/5000	> 80	Black	130 x 130 x 80

## CUBE II S9320 - 10W

LED 10 watt surface mount CUBE wall luminaire

### Application


Ideal for any residential or commercial interior or exterior space

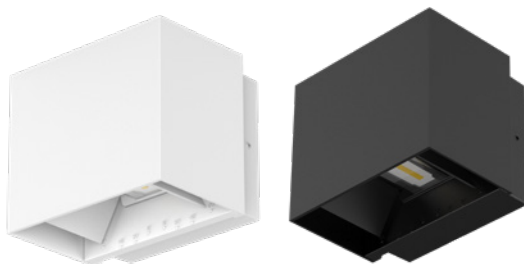

### Design Specifications

- Durable aluminium body profile, colour white & black
- Quality powder coat finish
- High efficiency SMD LED chips
- Independent up & down beam angle adjustable from 0° to 60°
- Integral constant current non-dimmable LED driver
- Indirect illumination optical performance

### Dimensions

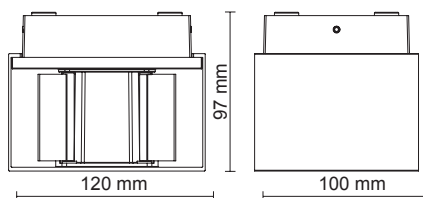


### Performance

Dimmable Driver - No

### Photometric Data

Unit: cd C0/C180 C30/C210  
C60/C240 C90/C270


S9320WW at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
S9320WW/WH	240/50	10	750	3000	> 80	No	White
S9320WW/BK	240/50	10	750	3000	> 80	No	Black
S9320NDL/WH	240/50	10	900	5000	> 80	No	White
S9320NDL/BK	240/50	10	900	5000	> 80	No	Black

For terms and conditions of catalogue data use, refer to INDEX

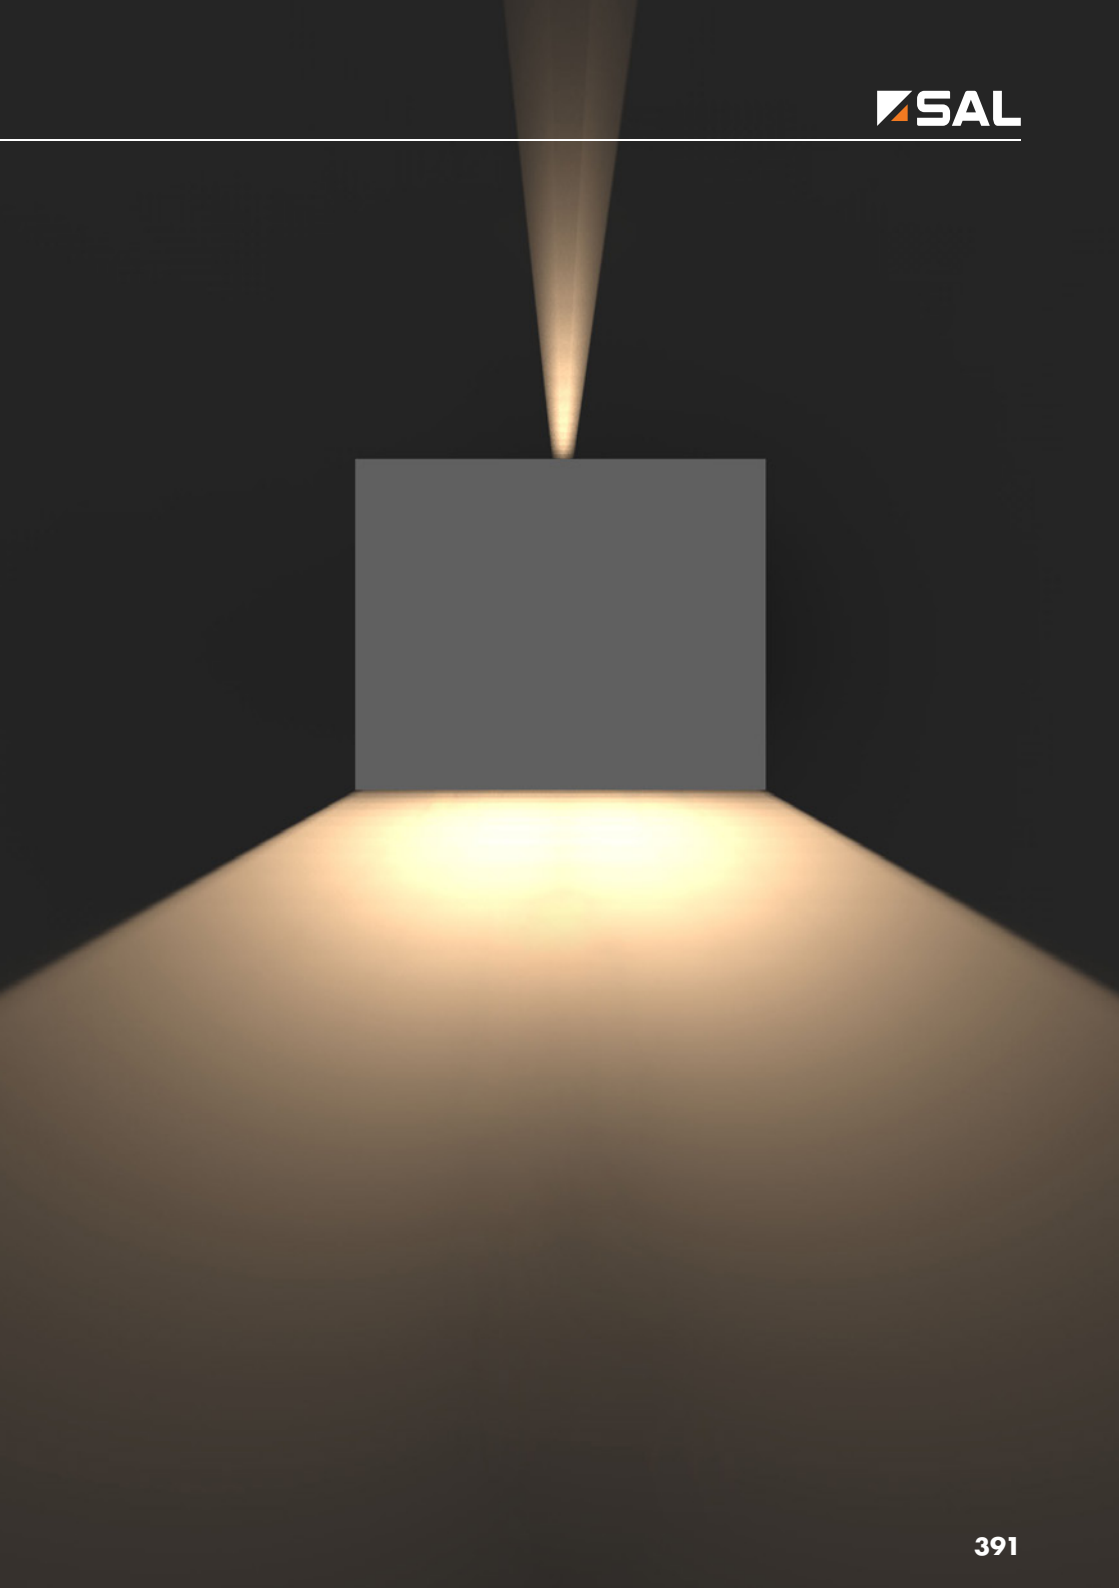

## BONDI SE7121TC, SE7122TC, SE7123TC

IP65 LED architectural GU10 wall luminaires, selectable GU10 TC lamp included

### Application

A decorative residential exterior or interior solution

### Design Specifications

- Machined 316L stainless steel or cast aluminium body, powder coated finish (Black, Silver)
- 240V termination
- Clear tempered glass cover
- GU10 lamp base with GU10L350TC lamp included
- Lamp options:  
GU10L550TC,  
GU10LR750  
(excluding stainless steel fitting),  
GU10LA750  
(excluding stainless steel fitting)  
See Lamp section for detail



SE7121TC/SLS



SE7121TC/BK



SE7121TC/SL



SE7122TC/SLS



SE7122TC/BK



SE7122TC/SL



SE7123TC/SLS




SE7123TC/BK




SE7123TC/SL


## Dimensions



**SE7121TC**

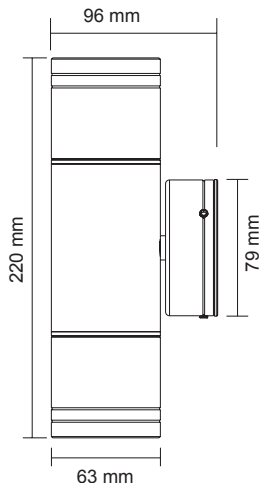

**SE7122TC**

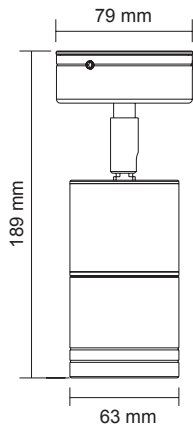

**SE7123TC**

## Technical Specifications

Model No.	Input (V)/(Hz)	Material	Fitting Colour
SE7121TC/SLS	240/50	Machined 316L stainless steel	Stainless Steel
SE7121TC/BK	240/50	Die cast aluminium	Black
SE7121TC/SL	240/50	Die cast aluminium	Silver
SE7122TC/SLS	240/50	Machined 316L stainless steel	Stainless Steel
SE7122TC/BK	240/50	Die cast aluminium	Black
SE7122TC/SL	240/50	Die cast aluminium	Silver
SE7123TC/SLS	240/50	Machined 316L stainless steel	Stainless Steel
SE7123TC/BK	240/50	Die cast aluminium	Black
SE7123TC/SL	240/50	Die cast aluminium	Silver



## ETON SE7133TC

IP54, GU10 lamp base  
architectural wall luminaire, with  
selectable TC lamp included

### Application

A decorative residential exterior  
or interior solution

### Design Specifications

- Die-cast aluminium body and powder coat black or silver body profile
- Clear tempered glass cover
- GU10 lamp base, selectable TC lamp GU10L350TC included
- Lamp options:  
GU10L550TC, GU10LR750, GU10LA750
- Downward light distribution only

### Performance

Dimmable - Refer lamp selection




SE7133TC/BK



SE7133TC/SL

### Dimensions



W 68 mm



W 93 mm

H 110 mm



### Technical Specifications

Model No.	Input (V)/(Hz)	Fitting Colour	Number of Lamps incl.
SE7133TC/BK	240/50	Black	1
SE7133TC/SL	240/50	Silver	1

For terms and conditions of catalogue data use, refer to INDEX

## ETON SE7134TC

IP54, GU10 lamp base  
architectural wall luminaire, with  
selectable TC lamp included

### Application

A decorative residential exterior  
or interior solution

### Design Specifications

- Die-cast aluminium body and powder coat black or silver body profile
- Clear tempered glass cover
- GU10 lamp base, selectable TC lamp GU10L350TC included
- Lamp options:  
GU10L550TC, GU10LR750, GU10LA750
- Up and down light distribution

### Performance

Dimmable - Refer lamp selection




SE7134TC/BK




SE7134TC/SL

### Dimensions



W 68 mm



W 93 mm

### Technical Specifications

Model No.	Input (V)/(Hz)	Fitting Colour	Number of Lamps incl.
SE7134TC/BK	240/50	Black	2
SE7134TC/SL	240/50	Silver	2

## NEW BONDI SL7221TC, SL7222TC

IP65 GU10 architectural wall luminaires,  
with GU10 selectable TC lamp included

### Application


A decorative residential exterior  
or interior solution

### Design Specifications

- Aluminium body profile, powder coat black or silver or anodized silver finish
- Clear tempered glass cover
- GU10 lamp base, selectable TC lamp GU10L350TC included
- Lamp options:  
GU10L550TC, GU10LR750, GU10LA750
- SL7221 downward light distribution only
- SL7222 up and down light distribution

### Performance


Dimmable - Refer lamp selection



SL7221TC/SL

SL7222TC/SL

### Dimensions

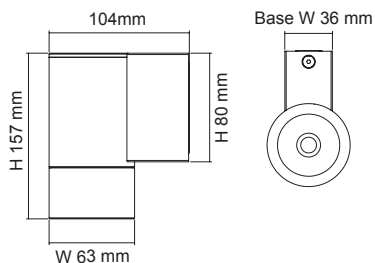

### Technical Specifications

Model No.	Input (V)/(Hz)	Fitting Colour	Number of Lamps incl.
SL7221TC/AS	240/50	Anodized Silver	1
SL7221TC/BK	240/50	Black	1
SL7221TC/SL	240/50	Silver	1
SL7222TC/AS	240/50	Anodized Silver	2
SL7222TC/BK	240/50	Black	2
SL7222TC/SL	240/50	Silver	2

For terms and conditions of catalogue data use, refer to INDEX

## NEW BONDI II SL7223 - 6W, SL7224 - 11W

IP65 LED architectural wall luminaires

### Application

A decorative residential exterior  
or interior solution

### Design Specifications

- Aluminium body profile, powder coat black or silver finish
- Clear tempered glass cover
- Polycarbonate optical lens
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver
- SL7223 downward light distribution only
- SL7224 up and down light distribution

### Performance

Dimmable Driver - No



### Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SL7223WW/BK	240/50	6	400	3000	> 80	38°	Black
SL7223WW/SL	240/50	6	400	3000	> 80	38°	Silver
SL7224WW/BK	240/50	11	2 x 400	3000	> 80	38°	Black
SL7224WW/SL	240/50	11	2 x 400	3000	> 80	38°	Silver



SL7223WW/BK

SL7224WW/BK


### Dimensions

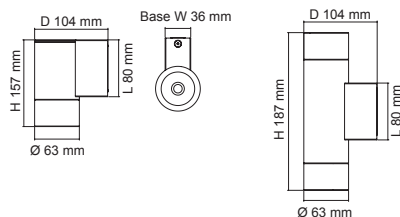

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

SL7223WW/BK at 3000K









## SCOOP SE7145 - 15W

IP65 LED architectural wall luminaire IK07

### Application

A decorative residential exterior or interior solution

### Design Specifications

- Die-cast aluminium body and powder coated body profile which can be installed upward or downward facing
- Clear tempered glass cover
- High efficiency COB LED chips
- High performance multifaceted reflector system
- Integral constant current non-dimmable LED driver

### Performance

Dimmable Driver - No




### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SE7145WW/BK	240/50	15	800	3000	> 80	30°	Black
SE7145WW/SL	240/50	15	800	3000	> 80	30°	Silver
SE7145CW/BK	240/50	15	900	4000	> 80	30°	Black
SE7145CW/SL	240/50	15	900	4000	> 80	30°	Silver




### Dimensions



### Photometric Data

Unit: cd C0/C180 — C90/C270

SE7145WW at 3000K



## QUARTER SE7146 - 16W

IP65 LED architectural wall luminaire IK07

### Application

A decorative residential exterior or interior solution

### Design Specifications

- Die-cast aluminium body and powder coated body profile
- Clear tempered glass cover
- High efficiency COB LED chips
- High performance multifaceted reflector system
- Integral constant current non-dimmable LED driver
- Installation orientation, face down only

### Performance

Dimmable Driver - No




### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SE7146WW/BK	240/50	16	1150	3000	> 80	25°	Black
SE7146WW/CB	240/50	16	1150	3000	> 80	25°	Charcoal Black
SE7146CW/BK	240/50	16	1200	4000	> 80	25°	Black
SE7146CW/CB	240/50	16	1200	4000	> 80	25°	Charcoal Black




### Dimensions

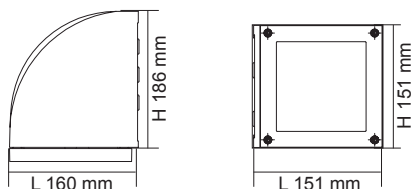

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

SE7146WW at 3000K





## MINI STEIN SE7147 - 16W

IP65 LED architectural wall luminaire, up and down

### Application


A decorative residential exterior or interior solution

### Design Specifications

- Die-cast aluminium body and powder coated body profile
- Clear tempered glass cover
- High efficiency COB LED chips
- High performance multifaceted reflector system, beam distribution 25°
- Integral constant current non-dimmable LED driver



### Dimensions

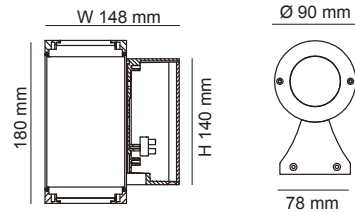


### Performance

Dimmable Driver - No

### Photometric Data

Unit: cd C0/C180 — C90/C270

SE7147WW at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SE7147WW/BK	240/50	16	2 x 400	3000	> 80	25°	Black
SE7147WW/CB	240/50	16	2 x 400	3000	> 80	25°	Charcoal Black
SE7147CW/BK	240/50	16	2 x 400	4000	> 80	25°	Black
SE7147CW/CB	240/50	16	2 x 400	4000	> 80	25°	Charcoal Black

For terms and conditions of catalogue data use, refer to INDEX

## STEIN SE7148 - 32W

IP65 LED architectural wall luminaire, up and down

### Application

A decorative residential exterior or interior solution

### Design Specifications


- Die-cast aluminium body and powder coated body profile
- Clear tempered glass cover
- High efficiency COB LED chips
- High performance multifaceted reflector system, standard beam distribution 25°, narrow beam distribution < 25° available
- Integral constant current non-dimmable LED driver



SE7148 CB

SE7148 BK


### Dimensions



### Photometric Data

Unit: cd C0/C180 — C90/C270 —

SE7148WW at 3000K

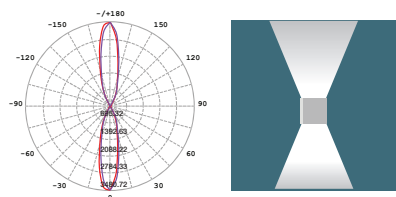

### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SE7148WW/BK	240/50	32	2 x 800	3000	> 80	25°	Black
SE7148WW/CB	240/50	32	2 x 800	3000	> 80	25°	Charcoal Black
SE7148CW/BK	240/50	32	2 x 800	4000	> 80	25°	Black
SE7148CW/CB	240/50	32	2 x 800	4000	> 80	25°	Charcoal Black
SE7148NB/WW/BK	240/50	32	800/500	3000	> 80	25°	Black
SE7148NB/WW/CB	240/50	32	800/500	3000	> 80	25°	Charcoal Black
SE7148NB/CW/BK	240/50	32	800/500	4000	> 80	25°	Black
SE7148NB/CW/CB	240/50	32	800/500	4000	> 80	25°	Charcoal Black

For terms and conditions of catalogue data use, refer to INDEX

Linked in YouTube



## ANGLE SE7088 - 18W

IP65 LED architectural adjustable surface mount luminaire

### Application

A decorative residential exterior or interior solution

### Design Specifications


- Die-cast aluminium body and powder coated body profile
- Clear tempered glass cover
- High efficiency COB LED chips
- High performance multifaceted reflector system
- Integral constant current non-dimmable LED driver
- Adjustable head 0~90°

### Performance

Dimmable Driver - No



### Dimensions



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SE7088 BK	240/50	18	1500	3000	> 80	40°	Black
SE7088 CB	240/50	18	1500	3000	> 80	40°	Charcoal Black

For terms and conditions of catalogue data use, refer to INDEX

## PILLAR SE7188 - 20W/62W

IP65 LED architectural circular profile  
surface mount downlight

### Application


A decorative residential exterior  
or interior solution

### Design Specifications

- Surface mounted downlight with concealed screw fixings, standard colour black
- Clear tempered glass cover
- High efficiency COB LED chips, standard CCT 4000K, optional 3000K/5000K
- Changeable high performance multifaceted reflector system, standard beam distribution 30°
- Integral constant current non-dimmable LED driver, 20, 28, 34, 38 and 62 watt models
- Optional beam distribution  
SE7188/80 - 10°, 20°, 40°, 50°,  
SE7188/110 - 10°, 20°, 40°, 70°,  
SE7188/150 - 12°, 20°, 40°, 70°



### Dimensions




### Photometric Data

Unit: cd C0/C180 — C90/C270

SE7188/80/20CW at 4000K

SE7188/110/34CW at 4000K

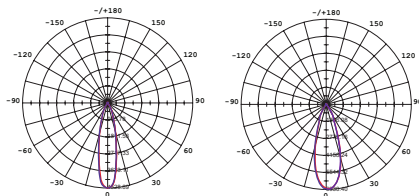

### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimension (D x H mm)
SE7188/80/20CW	240/50	20	2000	4000	> 80	30°	Black	80 x 136
SE7188/110/25CW	240/50	20	2500	4000	> 80	30°	Black	110 x 160
SE7188/110/34CW	240/50	28	3400	4000	> 80	30°	Black	110 x 160
SE7188/150/42CW	240/50	34	4200	4000	> 80	30°	Black	150 x 185
SE7188/150/49CW	240/50	38	4900	4000	> 80	30°	Black	150 x 185
SE7188/150/62CW	240/50	62	6200	4000	> 80	30°	Black	150 x 185

For terms and conditions of catalogue data use, refer to INDEX

## MAXI LOUVRED SE7135 - 7W

Recessed IP65 LED wall luminaire

### Application

A decorative commercial exterior or interior solution

### Design Specifications

- Die-cast aluminium body and powder coated face cover
- Opal polycarbonate diffuser
- High efficiency SMD LED chips with integral non-dimmable LED driver
- IP65 PVC cable gland
- ABS installation canister included

### Performance

Dimmable Driver - No




### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
SE7135WW/BK	240/50	7	80	3000	> 80	No	Black
SE7135WW/SL	240/50	7	80	3000	> 80	No	Silver
SE7135CW/BK	240/50	7	80	4000	> 80	No	Black
SE7135CW/SL	240/50	7	80	4000	> 80	No	Silver

For terms and conditions of catalogue data use, refer to INDEX


SE7135 SL

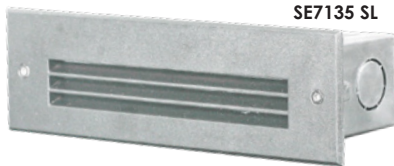

SE7135 BK




### Dimensions

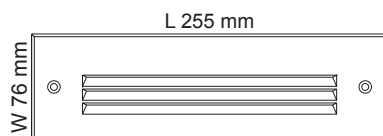

### Canister installation instructions

- A1 & A2 are the support plates used during the construction installation process to prevent deformation of the installation canister
- Slot in A1 & A2 plates during construction
- Please remove the support plates (A1 & A2) before final installation

Installation canister: L 235 mm x W 65 mm



## MAXI SLOT SE7136 - 7W

Recessed IP65 LED wall luminaire

### Application

A decorative commercial exterior or interior solution

### Design Specifications

- Die-cast aluminium body and powder coated face cover
- Opal polycarbonate diffuser
- High efficiency SMD LED chips with integral non-dimmable LED driver
- IP65 PVC cable gland
- ABS installation canister included

### Performance

Dimmable Driver - No




### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
SE7136WW/BK	240/50	7	60	3000	> 80	No	Black
SE7136WW/SL	240/50	7	60	3000	> 80	No	Silver
SE7136CW/BK	240/50	7	60	4000	> 80	No	Black
SE7136CW/SL	240/50	7	60	4000	> 80	No	Silver




### Dimensions

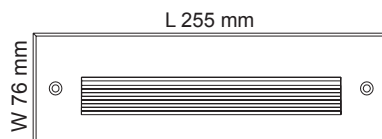

### Canister installation instructions

- A1 & A2 are the support plates used during the construction installation process to prevent deformation of the installation canister
- Slot in A1 & A2 plates during construction
- Please remove the support plates (A1 & A2) before final installation

Installation canister: L 235 mm x W 65 mm



## MAXI GRILLED SE7138 - 7W

Recessed IP65 LED wall luminaire

### Application

A decorative commercial exterior or interior solution

### Design Specifications

- Die-cast aluminium body and stainless steel face cover
- Opal polycarbonate diffuser
- High efficiency SMD LED chips with integral non-dimmable LED driver
- IP65 PVC cable gland
- ABS installation canister included


### Performance

Dimmable Driver - No




### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
SE7138WW	240/50	7	80	3000	> 80	No	Stainless Steel
SE7138CW	240/50	7	80	4000	> 80	No	Stainless Steel

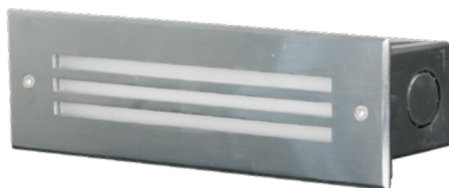


### Dimensions

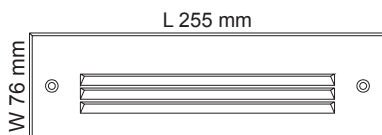

### Canister installation instructions

- A1 & A2 are the support plates used during the construction installation process to prevent deformation of the installation canister
- Slot in A1 & A2 plates during construction
- Please remove the support plates (A1 & A2) before final installation

 Installation canister: L 235 mm x W 65 mm



## MAXI PLAIN SE7139 - 7W

Recessed IP65 LED wall luminaire

### Application

A decorative commercial exterior or interior solution

### Design Specifications

- Die-cast aluminium body and stainless steel face cover
- Opal polycarbonate diffuser
- High efficiency SMD LED chips with integral non-dimmable LED driver
- IP65 PVC cable gland
- ABS installation canister included


### Performance

Dimmable Driver - No




### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
SE7139WW	240/50	7	140	3000	> 80	No	Stainless Steel
SE7139CW	240/50	7	140	4000	> 80	No	Stainless Steel

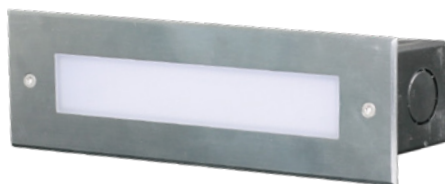


### Dimensions

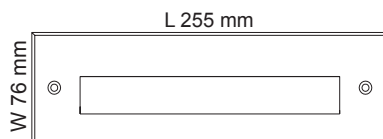

### Canister installation instructions

- A1 & A2 are the support plates used during the construction installation process to prevent deformation of the installation canister
- Slot in A1 & A2 plates during construction
- Please remove the support plates (A1 & A2) before final installation

 Installation canister: L 235 mm x W 65 mm





## MAXI EYELID SE7137 - 7W

Recessed IP65 LED wall luminaire

### Application

A decorative commercial exterior or interior solution

### Design Specifications

- Die-cast aluminium body and powder coated face cover
- Opal polycarbonate diffuser
- High efficiency SMD LED chips with integral non-dimmable LED driver
- IP65 PVC cable gland
- ABS installation canister included

### Performance

Dimmable Driver - No




### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
SE7137WW/BK	240/50	7	50	3000	> 80	No	Black
SE7137WW/SL	240/50	7	50	3000	> 80	No	Silver
SE7137CW/BK	240/50	7	50	4000	> 80	No	Black
SE7137CW/SL	240/50	7	50	4000	> 80	No	Silver

For terms and conditions of catalogue data use, refer to INDEX


SE7137 SL

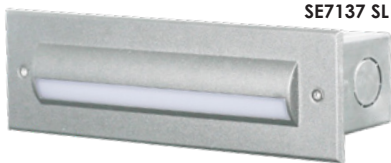

SE7137 BK




### Dimensions

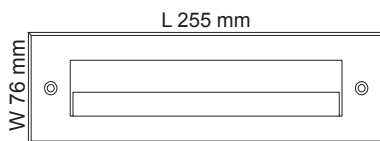

### Canister installation instructions

- A1 & A2 are the support plates used during the construction installation process to prevent deformation of the installation canister
- Slot in A1 & A2 plates during construction
- Please remove the support plates (A1 & A2) before final installation

Installation canister: L 235 mm x W 65 mm



## BREMER S9337 - 2W

Recessed IP44 LED wall luminaire

### Application

Decorative accent solution

### Design Specifications


- Die-cast aluminium body
- Stainless steel face panel & screws
- ABS installation canister included
- Clear tempered glass cover
- High output SMD LED chip
- Integral constant current non-dimmable LED driver
- 500 mm 3 core rubber flex

### Performance

Dimmable Driver - No



### Dimensions

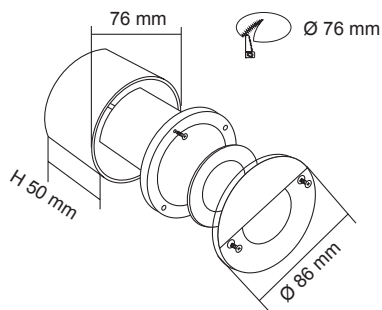

### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
S9337	240/50	2	140	3000	> 80	Stainless Steel

## MINI SPIKE SL7266 - 6W

IP65 LED residential mini spike luminaire

### Application

Decorative accent solution

### Design Specifications


- Die-cast powder coated black aluminium body profile
- 12V AC or DC driver required
- High efficiency COB LED chips
- Supplied with 1.5 m 2 core rubber flex
- IP65 protection
- Adjustable trunnion optical system

### Performance

Dimmable Driver - No



### Dimensions



### Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SL7266WW/BK	12V AC/DC	6	400	3000	> 80	30°	Black

## NEWPORT SPIKE SL7261TC - 5W

IP54 MR16 LED residential spike luminaire, with TC selectable lamp

### Application

Decorative accent solution

### Design Specifications

- Machined 316L stainless steel or extruded aluminium body profile, black or silver or anodized silver finish
- Clear tempered glass cover
- GU5.3 lamp base, MR16 5W TC selectable lamp included
- 600 mm 2 core rubber flex
- 12V AC or DC driver required
- Lamp options - MR16/7W, MR16DIM9W (excluding Stainless Steel fittings)


### Performance

Dimmable - Refer lamp selection



SL7261TC/SL SL7261TC/BK SL7261TC/AS SL7261TC/SLS

### Dimensions

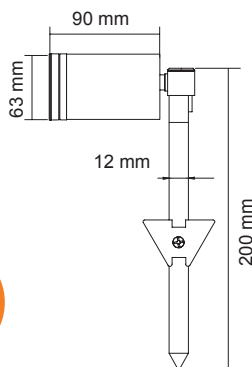

### Technical Specifications

Model No.	Input (V)	Lamp Base	Material	Fitting Colour	Type
SL7261TC/SLS	12V AC/DC	GU5.3	Machined 316L Stainless Steel	Stainless Steel	Single Head
SL7261TC/SL	12V AC/DC	GU5.3	Extruded Aluminium	Silver	Single Head
SL7261TC/BK	12V AC/DC	GU5.3	Extruded Aluminium	Black	Single Head
SL7261TC/AS	12V AC/DC	GU5.3	Extruded Aluminium	Anodized Silver	Single Head

## MURRAY I - SE7007, SE7017, SE7008, SE7018, SE7009, SE7019


LED wall and post mount luminaires

### Application

Decorative exterior pathway bollards

### Design Specifications


- 304 stainless steel body
- Powder coated finish (black)
- Opal acrylic diffuser
- E27 lamp base, lamp not included
- Lamp options - LG5, LG9, LGS4, LGS8, LGS10, LT407, LT409

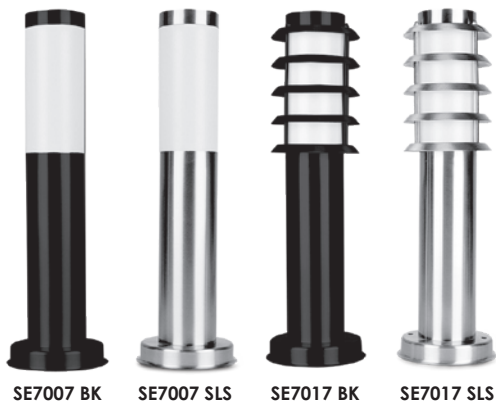

### Technical Specifications

Model No.	Input (V)/(Hz)	Fitting Colour
SE7007 BK	240/50	Black
SE7007 SLS	240/50	Stainless Steel
SE7017 BK	240/50	Black
SE7017 SLS	240/50	Stainless Steel
SE7008 BK	240/50	Black
SE7008 SLS	240/50	Stainless Steel
SE7018 BK	240/50	Black
SE7018 SLS	240/50	Stainless Steel
SE7009 BK	240/50	Black
SE7009 SLS	240/50	Stainless Steel
SE7019 BK	240/50	Black
SE7019 SLS	240/50	Stainless Steel

### Dimensions

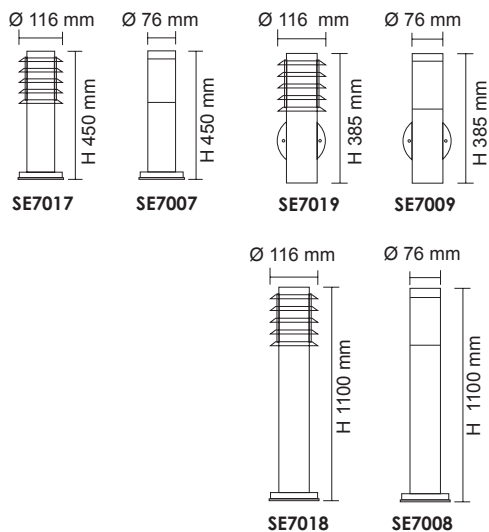

For terms and conditions of catalogue data use, refer to INDEX



SE7009 BK



SE7009 SLS



SE7019 BK



SE7019 SLS



SE7008 BK



SE7008 SLS



SE7018 BK



SE7018 SLS

## SWAN SE7085, SE7086

LED stainless steel wall or ground mount luminaire

### Application

Decorative exterior stainless steel, ideal for foyers and residential perimeters

### Design Specifications

- Stainless steel body
- Clear acrylic diffuser
- 240V, E27 lamp base, lamp not included
- Lamp options LG5, LG9, LGS4, LGS8, LGS10, LT407, LT409




### Technical Specifications

Model No.	Input (V)/(Hz)	Fitting Colour
SE7085	240/50	Stainless Steel
SE7086/55	240/50	Stainless Steel
SE7086/100	240/50	Stainless Steel


SE7085




### Dimensions



SE7086/55



SE7086/100



## BOLLARD SE7102/LGLS

LED bollard, E27 lamp base (only) bollard

### Application

A stylish design, ideal for residential exterior garden and pathway spaces

### Design Specifications

- Die-cast aluminium body, base plate mounting
- Durable powder coated black or silver finish
- Clear polycarbonate diffuser
- Stainless steel reflector, lamp base E27, lamp not included
- Lamp options LG5, LG9, LGS4, LGS8, LGS10, LT407, LT409

### Performance

Dimmable - Refer lamp options




### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SE7102 BK/LGLS	Refer to the Lamp section of this catalogue					Black
SE7102 SL/LGLS						Silver



### Dimensions

Ø 203 mm

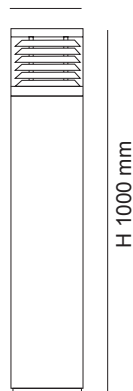



## BOLLARD SLA7102 - 18W

IP54, 18 watt LED bollard

### Application

A stylish design, ideal for commercial or residential pathway spaces

### Design Specifications

- Die-cast aluminium body
- Durable powder coated black or silver finish
- Clear polycarbonate diffuser
- Matt aluminium reflector, High efficiency SMD LED chips, integral constant current non-dimmable LED driver



SLA7102SL



SLA7102BK

### Dimensions

Ø 203 mm



H 1000 mm


### Performance

Dimmable Driver - No

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

SLA7102BK at 6000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SLA7102BK	240/50	18	1200	6000	> 80	Black
SLA7102SL	240/50	18	1200	6000	> 80	Silver

For terms and conditions of catalogue data use, refer to INDEX



## BOLLARD SE7103 - SE7106

Circular IP54, E27 lamp base (only) bollard

### Application


Ideal for residential or apartment exterior pathways

### Design Specifications

- Die-cast aluminium body
- Durable BLACK powder coated finish
- Opal polycarbonate diffuser
- E27 lamp base, lamp NOT included
- Lamp options LG5, LG9, LGS4, LGS8, LGS10, LT407, LT409



### Dimensions



### Performance

Dimmable - Refer model No.



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SE7103BK/LGLS	Refer to the Lamp section of this catalogue					Black
SE7104BK/LGLS						Black
SE7105BK/LGLS						Black
SE7106BK/LGLS						Black

For terms and conditions of catalogue data use, refer to INDEX

## NEW FLINDERS POST SE7061 - 6W

LED architectural post luminaire

### Application


Functional and decorative exterior pathway bollards

### Design Specifications

- Extruded aluminium body
- Durable powder coated finish
- Opal polycarbonate diffuser
- GX53 LED lamp included or integral low voltage SMD LED chips (12V AC or DC driver required)



### Dimensions



### Performance

Dimmable Driver - No



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Lamp Base	Fitting Colour
SE7061/800 BK	240/50	6	450	6000	GX53	Black
SE7061/800 LV BK	12V AC/DC	6	500	6000	N/A	Black

## GLOW SL7362 - 4W

4 watt, IP67 LED inground luminaire, IK08 rated

### Application

Decorative residential exterior solution, ideal for decks and pathways

### Design Specifications


- Durable stainless steel body
- Clear tempered glass diffuser
- Frosted optical LED lens
- High output LED chips
- 12V DC constant voltage driver required
- 1 m 2 core rubber flex, IP67 nickel plated copper cable gland
- PVC installation cannister included
- Suitable LED drivers, PLUTO 15DV, PLUTO 30DV, PLUTO 50DV

### Performance

Dimmable Driver - No



### Dimensions

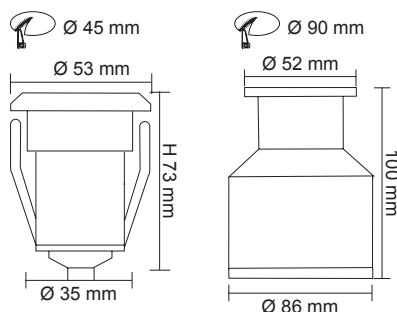

### Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SL7362WW/SLS	12V DC	4	300	3000	> 80	15°	Stainless Steel
SL7362DL/SLS	12V DC	4	300	6000	> 80	15°	Stainless Steel

For terms and conditions of catalogue data use, refer to INDEX

## GROUND S9338 - 3W

3 watt adjustable IP67 LED  
inground luminaire

### Application

Decorative residential exterior solution,  
ideal for gardens and decorative pathways

### Design Specifications


- Die-cast aluminium body
- Stainless steel face panel & screws, clear tempered glass diffuser
- High output LED chips
- 24V DC driver required
- Beam angle 30°, optical adjustment between 50°~60°
- PC installation canister included, 600 mm 2 core rubber flex
- Suitable LED drivers, PLUTO 15DV, PLUTO 30DV, PLUTO 50DV, PLUTO 100/24V

### Performance


Dimmable Driver - No



### Dimensions

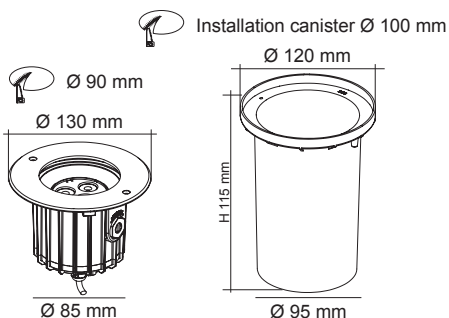

### Optical adjustment

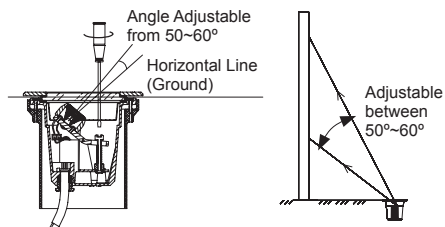

### Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
S9338/3W/30 WW	24V DC	3	150	3000	> 70	30°	Stainless Steel
S9338/3W/30 DL	24V DC	3	200	6000	> 70	30°	Stainless Steel



## HAMPTONS SE8002

IP65 LED residential deck light kits

### Application

Decorative exterior feature lighting



SE8002 LED deck light kit


### Design Specifications

- Durable 316 stainless steel face
- Aluminium body
- Frosted polycarbonate diffuser
- Ø35 mm x H26 mm round deck lights
- 6 x 0.6W deck light head with 3.5 m PVC flex & 2 pin quick connect plug
- 6 m rubber flex with 6 x 2 pin quick connect sockets
- 1 x IP65 10VA driver
- SE8002P extension kit contents include:  
1 x Ø35 x H26 mm, 316 stainless steel face round deck light, 1 x 3.5 m PVC flex with 2 pin quick connect plug,  
1 x 1.1 m extension cable



SE8002P LED deck light extension kit

### Dimensions

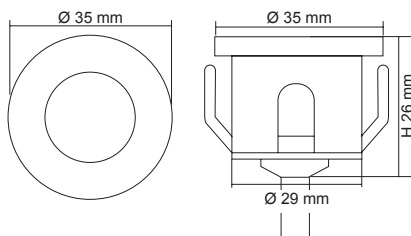

### Technical Specifications

Model No.	Power (W)	CCT (K)	CRI	Dimmable
SE8002WW	6 x 0.6	3000	> 80	No
SE8002NDL	6 x 0.6	5000	> 80	No

Model No.	Power (W)	CCT (K)	CRI	Dimmable
SE8002P/WW	1 x 0.6	3000	> 80	No
SE8002P/NDL	1 x 0.6	5000	> 80	No

# SAL **PIXIE** PLUS CONTROL YOUR HOME LIGHTING FROM ANYWHERE IN THE WORLD





## GROUND MK II S9341 - 8W

Adjustable LED inground IP67 luminaire

### Application

Decorative LED solution, ideal for gardens and decorative pathways

### Design Specifications

- 316L stainless steel face cover, die-cast aluminium body
- Clear tempered glass diffuser
- High efficiency SMD LED chips with optical lens
- Integral constant current non-dimmable LED driver
- IP68 PG9 PVC cable gland, PVC installation canister included
- 450 mm 3 core rubber flex
- Maximum load capacity 2000 kg

### Performance

Dimmable Driver - No




### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Load Pressure Capacity (Kg)
S9341WW	240/50	8	350	3000	> 80	30°	Stainless Steel	2000
S9341CW	240/50	8	400	4000	> 80	30°	Stainless Steel	2000



### Dimensions

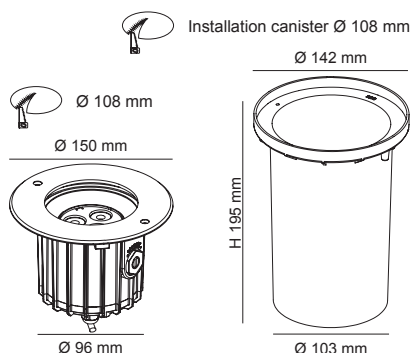

## GEO S9342, S9343, S9344, S9345 - 8W/32W

8/32 watt, LED inground IP67  
luminaire, IK09 rated

### Application


Decorative LED solution, ideal for  
gardens and decorative pathways

### Design Specifications

- 316L stainless steel face cover and allen screws, die-cast aluminium body
- Clear tempered glass diffuser
- High output COB LED chip
- High performance multifaceted reflector
- Integral constant current non-dimmable LED driver,
- IP68 PG11 PVC cable gland, silicon gasket
- PVC installation canister included
- 450 mm 3 core rubber flex



### Dimensions

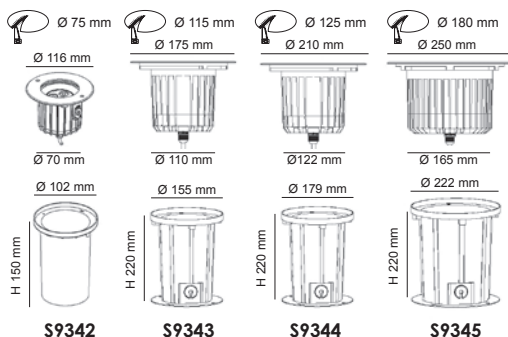

### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Load Pressure Capacity (Kg)
S9342WW	240/50	8	400	3000	> 80	24°	Stainless Steel	3000
S9342CW	240/50	8	450	4000	> 80	24°	Stainless Steel	3000
S9343WW	240/50	13	600	3000	> 80	24°	Stainless Steel	4400
S9343CW	240/50	13	700	4000	> 80	24°	Stainless Steel	4400
S9344WW	240/50	20	1200	3000	> 80	24°	Stainless Steel	4900
S9344CW	240/50	20	1400	4000	> 80	24°	Stainless Steel	4900
S9345WW	240/50	32	2000	3000	> 80	24°	Stainless Steel	5000
S9345CW	240/50	32	2200	4000	> 80	24°	Stainless Steel	5000

For terms and conditions of catalogue data use, refer to INDEX

## PATHWAY 4 WAY S9346, S9347 PATHWAY 2 WAY S9348, S9349

LED inground IP65 luminaire, IK10

### Application


Decorative LED solution, ideal for gardens and decorative pathways



### Design Specifications

- 316L stainless steel face cover, die-cast aluminium body
- Clear tempered glass diffuser
- High efficiency SMD LED chips with optical lens
- Integral constant current non-dimmable LED driver
- IP68 PG9 PVC cable gland, PVC installation canister included
- 450 mm 3 core rubber flex
- Maximum load capacity 2000 kg

### Dimensions

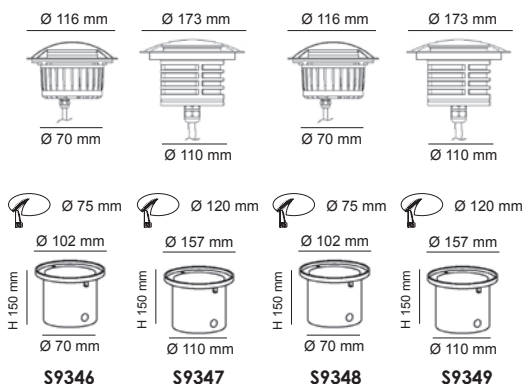

### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Load Pressure Capacity (Kg)
S9346WW	240/50	4	160	3000	> 80	30°	Stainless Steel	2000
S9346CW	240/50	4	160	4000	> 80	30°	Stainless Steel	2000
S9347WW	240/50	4	160	3000	> 80	30°	Stainless Steel	2000
S9347CW	240/50	4	160	4000	> 80	30°	Stainless Steel	2000
S9348WW	240/50	4	80	3000	> 80	30°	Stainless Steel	2000
S9348CW	240/50	4	80	4000	> 80	30°	Stainless Steel	2000
S9349WW	240/50	4	80	3000	> 80	30°	Stainless Steel	2000
S9349CW	240/50	4	80	4000	> 80	30°	Stainless Steel	2000

For terms and conditions of catalogue data use, refer to INDEX

## PATHWAY 1 WAY S9351, S9352

LED inground IP65 luminaire, IK10

### Application

Decorative LED solution, ideal for gardens and decorative pathways

### Design Specifications




- 316L stainless steel face cover, die-cast aluminium body
- Clear tempered glass diffuser
- High efficiency SMD LED chips with optical lens
- Integral constant current non-dimmable LED driver
- IP68 PG9 PVC cable gland, PVC installation canister included
- 450 mm 3 core rubber flex
- Maximum load capacity 2000 kg

### Performance

Dimmable Driver - No



### Dimensions



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Load Pressure Capacity (Kg)
S9351WW	240/50	4	40	3000	> 80	30°	Stainless Steel	2000
S9351CW	240/50	4	40	4000	> 80	30°	Stainless Steel	2000
S9352WW	240/50	4	40	4000	> 80	30°	Stainless Steel	2000
S9352CW	240/50	4	40	4000	> 80	30°	Stainless Steel	2000

For terms and conditions of catalogue data use, refer to INDEX






**Terms and conditions of catalogue data use:**

1. Copyright SAL National Pty Ltd 2021
2. Compliances, installation and operations reflect product use in the region of Australia (and New Zealand for products listed on [www.sal.co.nz](http://www.sal.co.nz)).
3. All data and images contained within remain the property of SAL National Pty Ltd, or as acknowledged by the provider.
4. Trademarks shown remain the property of the relevant brand, company or third party. SAL, PIXIE PLUS and PIXIE are trademarks of SAL National.
5. Images, tones and finishes shown are for guidance only and may vary from the actual product, which if critical to the installation must be confirmed at order placement.
6. Due to continued product specification, standards and information updates, product data sourced from this document shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order.
7. For INTERIOR products, the designated IP rating is "from below the ceiling" unless otherwise specified.
8. SAL products are designed in accordance with all relevant and mandatory International and Australian Standards, which require installation by a qualified installer in accordance AS/NZS3000 and the manufacturers installation instructions, which require regular cleaning and maintenance of the equipment.
9. Product sales arising from this publication are sold in accordance with SAL standard terms and conditions of sale, available via [www.sal.net.au](http://www.sal.net.au) and [www.sal.co.nz](http://www.sal.co.nz) where relevant.
10. Due to continued product and regulative developments, validation of ANY sustainable rebate program product accreditation, must be confirmed prior to purchase via the relevant authority's web site.

