




SINCE 1998

SMARTER LIGHTING CHOICES


SINCE 1998

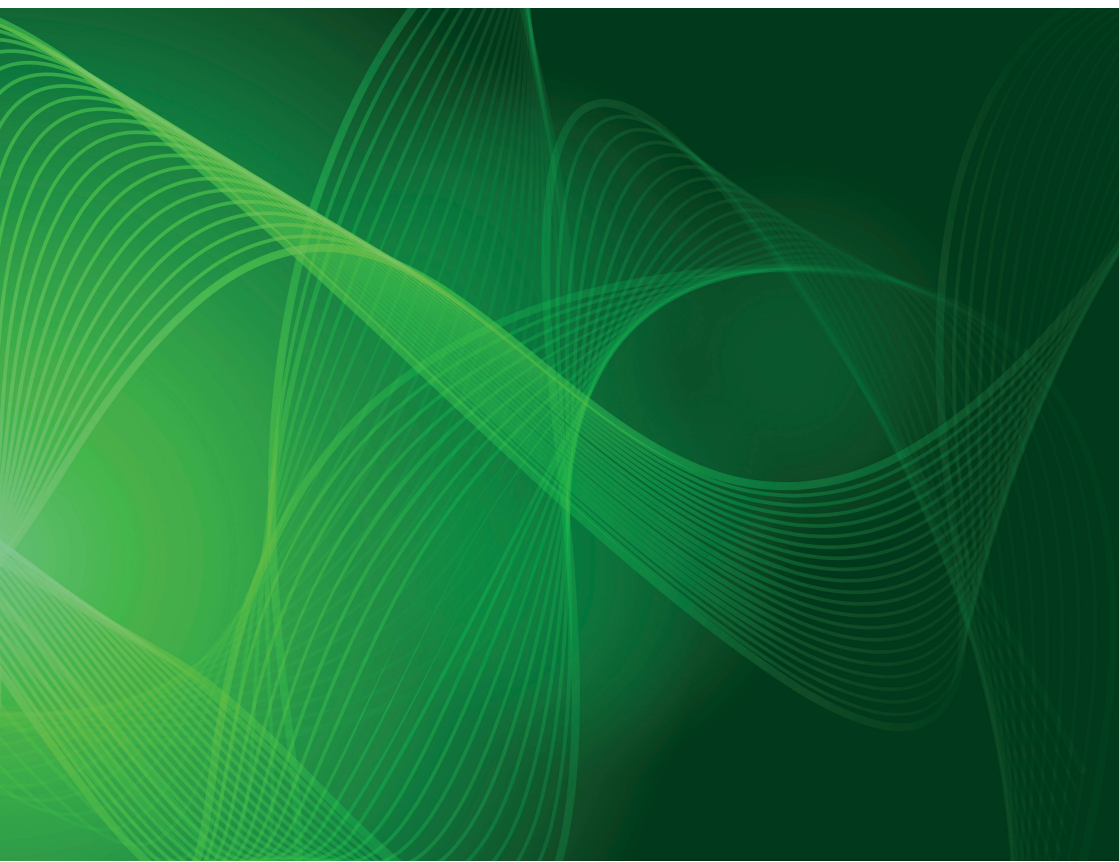



LED BULKHEADS

A robust range of commercial and industrial LED bulkheads.



**DID
YOU
KNOW** ?

Lighting products have thermal design limits. As outlined in the mandatory Safety Standard AS/NZS60598, lighting products are designed to maximum operating thermal limits (ta rating) to ensure the products operate safely within the applied installation. Look out for these operating limits (ta) in all professional installation instructions and the relevant SAL product web page.



REC-BUNKER SE7087L - 18W

Vandal resistant, IP54 LED bunker ceiling mount luminaire, IK10 rated

Application


A reliable solution for commercial utility spaces

Design Specifications

- Robust die-cast aluminium body
- Durable white powder coat finish
- Stainless steel allen screws
- High efficiency SMD LED chips, beam distribution 90°
- Integral constant current non-dimmable LED driver
- UV stabilised opal polycarbonate diffuser
- Designed with silicone gasket



Dimensions

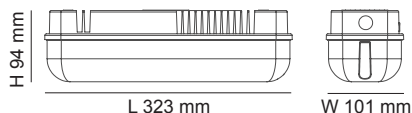


Performance

Dimmable Driver - Optional
Dimmer Type - Trailing Edge

Photometric Data

Unit: cd C0/C180 — C90/C270 —

SE7087L at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
SE7087L	240/50	18	1450	4000	> 80	90°	Optional	White

For terms and conditions of catalogue data use, refer to INDEX

BRONX SE7089 - 55W

Vandal resistant, IP65 LED wall mount luminaire, IK10 rated

Application


A robust solution for commercial exterior spaces and security

Design Specifications

- Die-cast aluminium body
- Durable black powder coat finish
- UV stabilised opal polycarbonate diffuser
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver, pre-wired with 450mm of 3 x core rubber flex



Dimensions

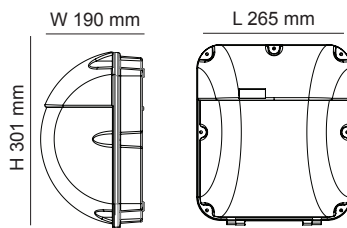

Performance

Dimmable Driver - No


In Built Sensor - Optional

Sensor Type - Microwave

Photometric Data

Unit: cd C0/C180 — C90/C270

SE7089BK at 5000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
SE7089BK	240/50	55	4500	5000	> 70	No	Black

For terms and conditions of catalogue data use, refer to INDEX

Linked in YouTube



MEMPHIS SQUARE SL9719SQ - 22W

Vandal resistant, IP65 LED square surface mount luminaire, IK10 rated

Application


A robust solution for industrial and commercial spaces

Design Specifications

- Die-cast aluminium body
- Frosted polycarbonate diffuser, silicone gasket
- Stainless steel allen screws
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver
- Designed with multi access rear or side conduit entry points
- corridorSTANDBY options available
- Product selections compliant to AS/NZS2293 Emergency Lighting & Exit Signs are located in the exterior emergency section of this catalogue



Dimensions

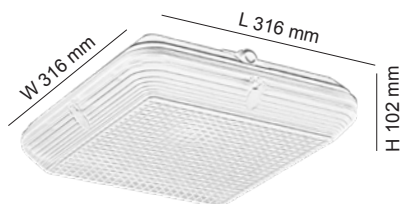

Performance

Dimmable Driver - Optional

Dimmer Type - Trailing edge, 1-10V, DALI / DSI


In Built Sensor - Optional

Sensor Type - Microwave

Photometric Data

Unit: cd C0/C180 — C90/C270 —

SL9719SQ at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
SL9719SQ	240/50	22	1700	4000	> 80	Optional	White
SL9719SQ/C	240/50	22	1700	4000	> 80	Optional	White

For terms and conditions of catalogue data use, refer to INDEX

MEMPHIS ROUND SL9719RD - 22W

Vandal resistant, IP65 LED round surface mount luminaire, IK10 rated

Application

A robust solution for industrial and commercial spaces

Design Specifications

- Die-cast aluminium body
- Frosted polycarbonate diffuser, silicone gasket
- Stainless steel allen screws
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver
- Designed with multi access rear or side conduit entry points
- corridorSTANDBY options available
- Product selections compliant to AS/NZS2293 Emergency Lighting & Exit Signs are located in the exterior emergency section of this catalogue.

Performance

Dimmable Driver - Optional
Dimmer Type - Trailing edge
In Built Sensor - Optional
Sensor Type - Microwave




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
SL9719RD	240/50	22	1700	4000	> 80	Optional	White
SL9719RD/C	240/50	22	1700	4000	> 80	Optional	White




Dimensions

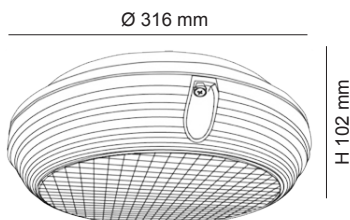

Photometric Data

Unit: cd C0/C180 C90/C270

SL9719RD at 4000K







BUNKER 15 OVAL SL7271 - 15W

LED 15 watt surface mount oval shaped bunker, IP65

Application


A robust solution for residential and apartment interior or exterior utility spaces

Design Specifications

- Durable white or black polycarbonate body, opal polycarbonate diffuser
- Integral control gear, 15 watt
- CRI >80, 1050lm
- Quick connect installation design
- Robust IK08 protection



Dimensions

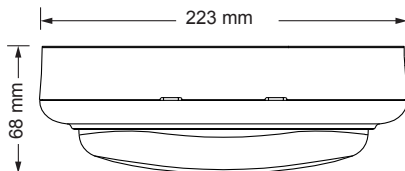


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270 —

SL7271CW/WH at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL7271CW/WH	240/50	15	1050	4000	> 80	110°	White	223 x 133 x 68
SL7271CW/BK	240/50	15	1050	4000	> 80	110°	Black	223 x 133 x 68

For terms and conditions of catalogue data use, refer to INDEX

BUNKER 15 OVAL SENSOR SL7271 - 15W

LED 15 watt surface mount oval shaped bunker, IP54 with PIR sensor

Application


A robust solution for residential and apartment interior or exterior utility spaces

Design Specifications

- Durable white or black polycarbonate body, opal polycarbonate diffuser
- Integral control gear, 15 watt with PIR sensor control, fixed 30 seconds ON,
- Max. 7 metres detection distance
- Daylight threshold >20 lux
- CRI >80, 1050lm
- Quick connect installation design
- Robust IK08 protection



Dimensions

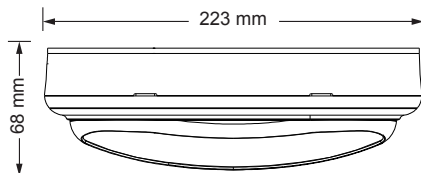


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270 —

SL7271CW/WH/S at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL7271CW/WH/S	240/50	15	1050	4000	> 80	110°	White	223 x 133 x 68
SL7271CW/BK/S	240/50	15	1050	4000	> 80	110°	Black	223 x 133 x 68

For terms and conditions of catalogue data use, refer to INDEX






BUNKER 15 ROUND SL7272 - 15W

LED 15 watt surface mount round shaped bunker, IP65

Application


A robust solution for residential and apartment interior or exterior utility spaces

Design Specifications

- Durable white or black polycarbonate body, opal polycarbonate diffuser
- Integral control gear, 15 watt
- CRI >80, 1050lm
- Quick connect installation design
- Robust IK08 protection



Dimensions

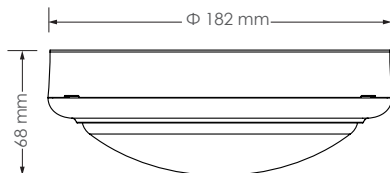


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270 —

SL7272CW/WH at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SL7272CW/WH	240/50	15	1050	4000	> 80	110°	White	Φ 182 x 68
SL7272CW/BK	240/50	15	1050	4000	> 80	110°	Black	Φ 182 x 68

For terms and conditions of catalogue data use, refer to INDEX

BUNKER 15 ROUND SENSOR SL7272 - 15W

LED 15 watt surface mount round shaped bunker,
IP54 with PIR sensor

Application

A robust solution for residential and
apartment interior or exterior utility spaces

Design Specifications

- Durable white or black polycarbonate body, opal polycarbonate diffuser
- Integral control gear, 15 watt with PIR sensor control, fixed 30 seconds ON
- Max. 7 metres detection distance
- Daylight threshold > 20 lux
- CRI >80, 1050lm
- Quick connect installation design
- Robust IK08 protection

Performance

Dimmable Driver - No




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SL7272CW/WH/S	240/50	15	1050	4000	> 80	110°	White	Φ 182 x 68
SL7272CW/BK/S	240/50	15	1050	4000	> 80	110°	Black	Φ 182 x 68




Dimensions

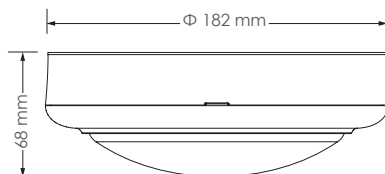

Photometric Data

Unit: cd C0/C180 — C90/C270 —

SL7272CW/WH/S at 4000K



Terms and conditions of catalogue data use:

1. Copyright SAL National Pty Ltd 2021
2. Compliances, installation and operations reflect product use in the region of Australia (and New Zealand for products listed on www.sal.co.nz).
3. All data and images contained within remain the property of SAL National Pty Ltd, or as acknowledged by the provider.
4. Trademarks shown remain the property of the relevant brand, company or third party. SAL, PIXIE PLUS and PIXIE are trademarks of SAL National.
5. Images, tones and finishes shown are for guidance only and may vary from the actual product, which if critical to the installation must be confirmed at order placement.
6. Due to continued product specification, standards and information updates, product data sourced from this document shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order.
7. For INTERIOR products, the designated IP rating is "from below the ceiling" unless otherwise specified.
8. SAL products are designed in accordance with all relevant and mandatory International and Australian Standards, which require installation by a qualified installer in accordance AS/NZS3000 and the manufacturers installation instructions, which require regular cleaning and maintenance of the equipment.
9. Product sales arising from this publication are sold in accordance with SAL standard terms and conditions of sale, available via www.sal.net.au and www.sal.co.nz where relevant.
10. Due to continued product and regulative developments, validation of ANY sustainable rebate program product accreditation, must be confirmed prior to purchase via the relevant authority's web site.

