




**SINCE 1998**

# **SMARTER LIGHTING CHOICES**

**SINCE 1998**



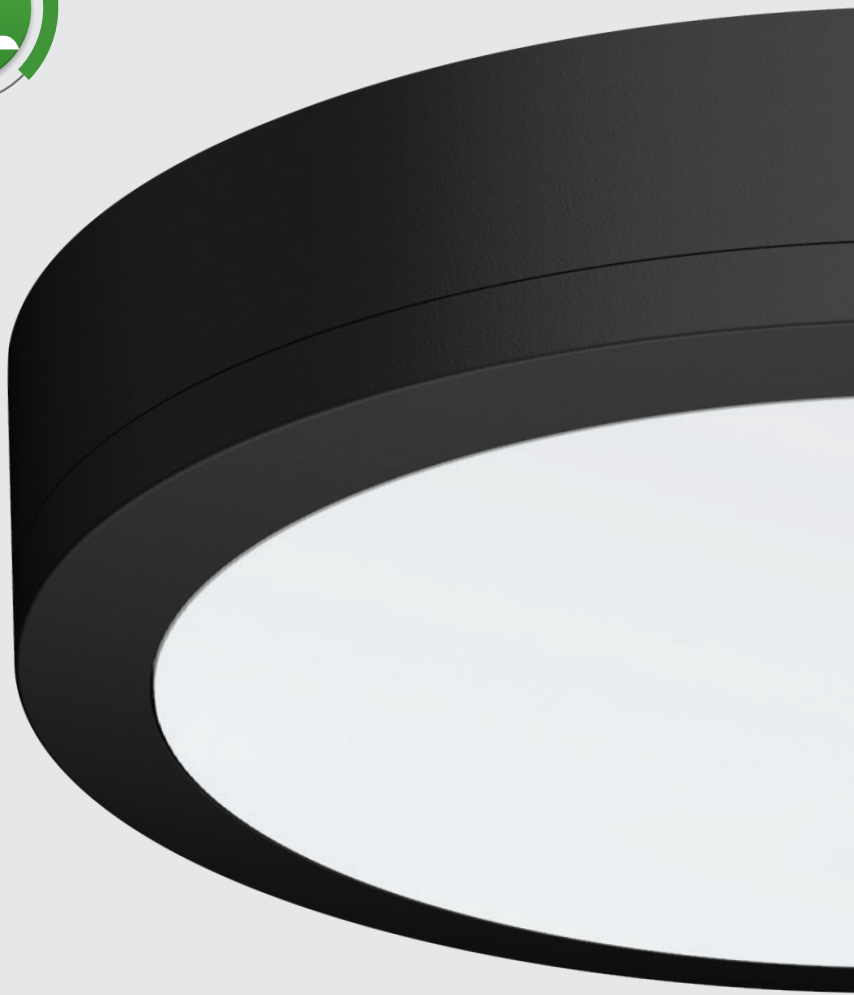

# LED EMERGENCY

An expansive range of  
LED exterior emergency  
luminaires compliant  
to AS/NZS 2293



The difference between Non-maintained and Maintained Emergency Lighting ? Non-Maintained lighting products are luminaires designed solely for emergency use and will only operate in an event where the mains supply power is interrupted. Maintained Emergency Lighting products are designed to be illuminated at all times, including an emergency event where the power is interrupted. Under both systems, the products must remain illuminated for a period of 90 minutes in accordance with AS/NZS2293 Emergency Lighting requirements.



**SAL**

MAINTAINED

NON-MAINTAINED

## KEW SL9721/EM - 20W/35W

IP65 LED emergency weatherproof  
batten, 20 or 35 watt models

### Application

Multi-purpose commercial or  
industrial utility applications

### Design Specifications

- Rounded shape vandal resistant design, robust polycarbonate body and UV stabilized polycarbonate diffuser and body
- Stainless steel clips & screws, IP65 and IK08 rated
- Integral constant current non-dimmable LED driver
- Optional corridorSTANDBY function for the 35 watt model
- Compliant to AS/NZS2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO4 battery technology

### Performance

Dimmable Driver - Optional



### Technical Specifications

Model No.	Input (V)/(Hz)	Maintained Power (W)	Emergency Classification	Battery Type	CCT (K)	Dimensions (L x W x H mm)
SL9721/20EM	240/50	Max. 20	D50@C0, D32@C90	IFR18650 6.4V 1500mAh	3000/5000	618 x 116 x 74
SL9721/35EM	240/50	Max. 35	D63@C0, D32@C90		3000/5000	1218 x 116 x 74



SL9721/20EM



SL9721/35EM


### Dimensions




### Photometric Data (at maintained power)

Unit: cd C0/C180 — C90/C270 —

SL9721/20EM at 3000K



SL9721/35EM at 5000K



For terms and conditions of catalogue data use, refer to INDEX





## Surface/suspended mounting clips to maintain IP rating



Surface mounting bracket



Suspension bracket



Stainless steel clips can be fastened with extra locking screws for security

## Accessories Included

- Allen key & screws
- PVC cable glands
- Suspension brackets

## Installation type

- Surface mounted
- Suspended  
(Suspension kit is required)



TC SELECTABLE COLOUR

DUAL POWER

MAINTAINED

NON-MAINTAINED

## SOL SL9726 TC/EM - 20W/42W

IP65 LED weatherproof batten with selectable colour temperature and power

### Application

Commercial or industrial utility applications requiring IP65 and IK08 performance

### Design Specifications

- Selectable power and colour temperature, 3000/4000/6000K via the DIP switch
- Rounded shape vandal resistant design, robust polycarbonate body and UV stabilized polycarbonate diffuser and body
- Stainless steel clips & screws
- Integral constant current non-dimmable LED driver
- Optional corridorSTANDBY function for the 40 watt model
- Compliant to AS/NZS2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO4 battery technology

### Performance

Dimmable Driver - Optional  
Suspension Kits - Optional




SL9726/20TC/EM



SL9726/40TC/EM

### Dimensions


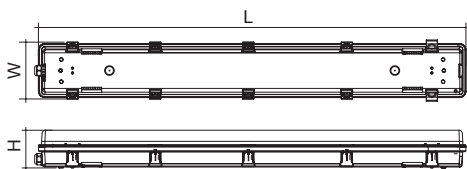


### Photometric Data (at maintained power)

Unit: cd C0/C180 C30/C210  
C60/C240 C90/C270

SL9726/20TC/EM at 3000K

SL9726/40TC/EM at 4000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Maintained Power (W)	Emergency Classification	Battery Type	Lumens at Maint. PWR	Dimensions (L x W x H mm)
SL9726/20TC/EM	240/50	Max.20	D32@C0, D25@C90	IFR18650 6.4V	1800lm	642 x 118 x 77
SL9726/40TC/EM	240/50	Max.42	D40@C0, D40@C90	1500mAh	3600lm	1215 x 118 x 77

For terms and conditions of catalogue data use, refer to INDEX



# SAL EMERGENCY WE'VE GOT YOU COVERED

The comprehensive range of SAL Emergency LED lighting products cover all your emergency needs; exits, luminaires and more.





MAINTAINED

NON-MAINTAINED

## MEMPHIS SQUARE SL9719SQ - 22W

Vandal resistant, IP65 LED square surface mount luminaire, IK10 rated

### Application


A robust solution for industrial and commercial spaces

### Design Specifications

- Die-cast aluminium body
- Frosted polycarbonate diffuser, silicone gasket
- Stainless steel allen screws
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver
- Compliant to AS/NZS2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO4 battery technology.
- Optional corridorSTANDBY function available



### Dimensions

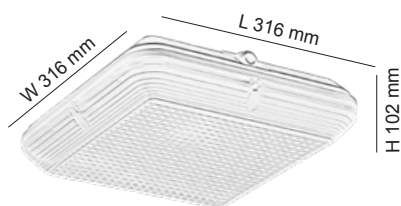


### Performance

Dimmable Driver - Optional

### Photometric Data (at maintained power)

Unit: cd C0/C180 — C90/C270 —

SL9719SQ/EM at 4000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Maintained Power (W)	Emergency Classification	Battery Type	Lumens at Maint. PWR	CCT (K)
SL9719SQ/EM	240/50	22	D32@C0, D25@C90	IFR18650 6.4V 1500mAh	1700lm	4000

For terms and conditions of catalogue data use, refer to INDEX

**SAL**

MAINTAINED

NON-MAINTAINED

## MEMPHIS ROUND SL9719RD - 22W

Vandal resistant, IP65 LED round surface mount luminaire, IK10 rated

### Application

A robust solution for industrial and commercial spaces

### Design Specifications


- Die-cast aluminium body
- Frosted polycarbonate diffuser, silicone gasket
- Stainless steel allen screws
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver
- Compliant to AS/NZS2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO4 battery technology
- Optional corridorSTANDBY function available

### Performance

Dimmable Driver - Optional




### Dimensions

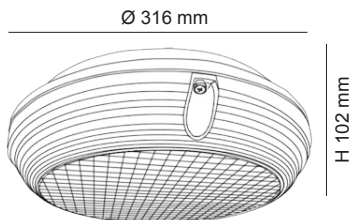

### Photometric Data (at maintained power)

Unit: cd C0/C180 — C90/C270 —

SL9719RD/EM at 4000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Emergency Power (W)	Emergency Classification	Battery Type	Lumens at Maint. PWR	CCT (K)
SL9719RD/EM	240/50	22	D32@C0	IFR18650 6.4V 1500mAh	1700lm	4000

For terms and conditions of catalogue data use, refer to INDEX

Linked in YouTube



**NEED A HAND  
PACKING YOUR  
PRODUCT DATA  
SHEETS?**



**GIVE THE SAL  
SHOPPING CART  
A GO.**

visit [www.sal.net.au](http://www.sal.net.au)



TC SELECTABLE COLOUR

MAINTAINED

NON-MAINTAINED

## COOPER III SE7192 TC - 18W

Decorative, vandal resistant 18 watt round profile  
IP65 architectural LED wall mount luminaire

### Application

A decorative architectural solution for residential  
& commercial interior or exterior spaces

### Design Specifications


- Convenient TC selectable colour temperature, 3000K/4000K/5700K
- Stylish black finish
- Integral non-dimmable control gear, 18 watt
- Robust PC body and diffuser profile
- High efficiency SMD LED
- Compliant to AS/NZS2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO4 battery technology

### Performance

Dimmable Driver - No




### Dimensions

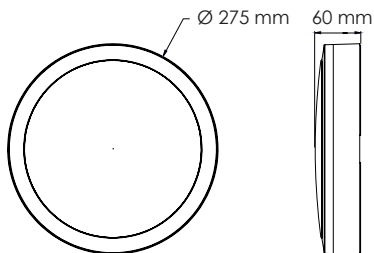

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

SE7192TC/BK/EM at 3000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Maintained Power (W)	Emergency Classification	Battery Type	Lumens at Maint. PWR	CCT (K)
SE7192TC/BK/EM	240/50	18	D20@C0	IFR26650 3.2V 3200mAh	1400lm	3000/4000/5700

For terms and conditions of catalogue data use, refer to INDEX



## COOPER SE7083L - 23W

Vandal resistant 23 watt, IP65 LED commercial bunker luminaire, IK10 rated

### Application


A decorative architectural solution for commercial exteriors

### Design Specifications

- Robust die-cast aluminium body, UV stabilized opal polycarbonate diffuser
- Durable black or silver powder coated finish
- Stainless steel allen screws
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver
- Compliant to AS/NZS2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO4 battery technology




### Dimensions



### Photometric Data (at maintained power)

Unit: cd C0/C180 — C90/C270 —

SE7083L/EM/WW at 3000K



### Performance

Dimmable Driver - Optional



### Technical Specifications

Model No.	Input (V)/(Hz)	Maintained Power (W)	Emergency Classification	Battery Type	Lumens at Maint. PWR	CCT (K)
SE7083L/EM/WW/SL	240/50	23	D25@C0	IFR18650 6.4V 1500mAh	1400lm	3000
SE7083L/EM/DL/SL	240/50	23			1500lm	6000
SE7083L/EM/WW/BK	240/50	23			1400lm	3000
SE7083L/EM/DL/BK	240/50	23			1500lm	6000

For terms and conditions of catalogue data use, refer to INDEX



**SAL**

MAINTAINED

NON-MAINTAINED

## COOPER SE7084L - 23W

Vandal resistant 23 watt, IP65 LED commercial bunker luminaire, IK10 rated

### Application


A decorative architectural solution for commercial exteriors

### Design Specifications

- Robust die-cast aluminium body, UV stabilized opal polycarbonate diffuser
- Durable black or silver powder coated finish
- Stainless steel allen screws
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver
- Compliant to AS/NZS2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO4 battery technology




### Dimensions



### Photometric Data (at maintained power)

Unit: cd C0/C180 — C90/C270 —

SE7084L/EM/WW at 3000K



### Performance

Dimmable Driver - Optional



### Technical Specifications

Model No.	Input (V)/(Hz)	Maintained Power (W)	Emergency Classification	Battery Type	Lumens at Maint. PWR	CCT (K)
SE7084L/EM/WW/SL	240/50	23	D20@C0	IFR18650 6.4V 1500mAh	1400lm	3000
SE7084L/EM/DL/SL	240/50	23			1500lm	6000
SE7084L/EM/WW/BK	240/50	23			1400lm	3000
SE7084L/EM/DL/BK	240/50	23			1500lm	6000

For terms and conditions of catalogue data use, refer to INDEX

Linked in YouTube



**Terms and conditions of catalogue data use:**

1. Copyright SAL National Pty Ltd 2021
2. Compliances, installation and operations reflect product use in the region of Australia (and New Zealand for products listed on [www.sal.co.nz](http://www.sal.co.nz)).
3. All data and images contained within remain the property of SAL National Pty Ltd, or as acknowledged by the provider.
4. Trademarks shown remain the property of the relevant brand, company or third party. SAL, PIXIE PLUS and PIXIE are trademarks of SAL National.
5. Images, tones and finishes shown are for guidance only and may vary from the actual product, which if critical to the installation must be confirmed at order placement.
6. Due to continued product specification, standards and information updates, product data sourced from this document shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order.
7. For INTERIOR products, the designated IP rating is "from below the ceiling" unless otherwise specified.
8. SAL products are designed in accordance with all relevant and mandatory International and Australian Standards, which require installation by a qualified installer in accordance AS/NZS3000 and the manufacturers installation instructions, which require regular cleaning and maintenance of the equipment.
9. Product sales arising from this publication are sold in accordance with SAL standard terms and conditions of sale, available via [www.sal.net.au](http://www.sal.net.au) and [www.sal.co.nz](http://www.sal.co.nz) where relevant.
10. Due to continued product and regulative developments, validation of ANY sustainable rebate program product accreditation, must be confirmed prior to purchase via the relevant authority's web site.

