



SMARTER **LIGHTING** **CHOICES**

SINCE 1998





LED INTERIOR ARCHITECTURAL

A diverse selection of LED interior architectural pendants and wall mount luminaires, ideal for residential and commercial spaces.



ANOVA S9105 - 4W

Compact 4 watt recessed LED cabinet luminaire

Application

Ideal for any residential or commercial interior space

Design Specifications


- Durable die-cast aluminium body profile
- Quality white powder coat or satin nickel plated finish
- High efficiency SMD LED chips
- Suitable drivers - PLUTO EGL12V/6W
PLUTO 15DV, 30DV, 50DV
- 12V DC LED driver required
- Low profile design

Performance

Dimmable Driver - No




Dimensions



Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9105WW at 3000K



Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9105WW/WH	12V DC	4	280	3000	> 80	90°	No	White
S9105CW/WH	12V DC	4	280	4000	> 80	90°	No	White
S9105DL/WH	12V DC	4	280	6000	> 80	90°	No	White
S9105WW/SN	12V DC	4	280	3000	> 80	90°	No	Satin Nickel
S9105CW/SN	12V DC	4	280	4000	> 80	90°	No	Satin Nickel
S9105DL/SN	12V DC	4	280	6000	> 80	90°	No	Satin Nickel

For terms and conditions of catalogue data use, refer to INDEX

ANOVA S9105 SR - 4W

Compact 4 watt surface mount LED cabinet luminaire

Application

Ideal for any residential or commercial interior space

Design Specifications


- Durable die-cast aluminium body profile
- Quality white powder coat or satin nickel plated finish
- High efficiency SMD LED chips
- Suitable drivers - PLUTO EGL12V/6W
PLUTO 15DV, 30DV, 50DV
- 12V DC LED driver required
- Low profile design

Performance

Dimmable Driver - No




Dimensions



Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9105WW SR at 3000K



Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9105WW SR/WH	12V DC	4	280	3000	> 80	90°	No	White
S9105DL SR/WH	12V DC	4	280	6000	> 80	90°	No	White
S9105WW SR/SN	12V DC	4	280	3000	> 80	90°	No	Satin Nickel
S9105DL SR/SN	12V DC	4	280	6000	> 80	90°	No	Satin Nickel

ANOVA S9105 ST - 4W

Compact 4 watt surface mount
LED cabinet luminaire

Application

Ideal for any residential or
commercial interior space

Design Specifications


- Durable die-cast aluminium body profile
- Quality white powder coat or satin nickel plated finish
- High efficiency LED chips
- Low profile design
- Suitable drivers - PLUTO EGL12V/6W
PLUTO 15DV, 30DV, 50DV
- 12V DC driver required

Performance

Dimmable Driver - No




Dimensions



Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9105WW ST at 3000K



Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9105WW ST/WH	12V DC	4	280	3000	> 80	90°	No	White
S9105DL ST/WH	12V DC	4	280	6000	> 80	90°	No	White
S9105WW ST/SN	12V DC	4	280	3000	> 80	90°	No	Satin Nickel
S9105DL ST/SN	12V DC	4	280	6000	> 80	90°	No	Satin Nickel

For terms and conditions of catalogue data use, refer to INDEX

BROOM S9311 - 3W

LED 3 watt recessed square
profile wall luminaire

Application

Ideal for any residential or
commercial interior space

Design Specifications

- Durable aluminium body profile
- Quality white powder coat or satin nickel plated finish
- High efficiency SMD LED chips, 3000K, CRI >80, beam distribution 105°
- Opal acrylic diffuser
- Suitable drivers - PLUTO EGL12V/6W PLUTO 15DV, 30DV, 50DV
- 12V AC or DC driver required

Performance

Dimmable Driver - No




Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9311 WH	12V AC/DC	3	110	3000	> 80	105°	No	White
S9311 SN	12V AC/DC	3	110	3000	> 80	105°	No	Satin Nickel
S9311 DL SN	12V AC/DC	3	110	6000	> 80	105°	No	Satin Nickel




Dimensions

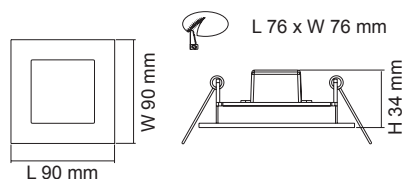

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9311 at 3000K




AMBIENCE S9312 - 1W

Stylish interior wall mount LED luminaire

Application


Residential hallways, bedrooms, stairways

Design Specifications

- Square aluminum face profile, powder coat white finish
- Integral 240V, 1.2W control gear
- CCT 3000K, 100lm
- IP54 front only
- Cut out: 77 x 77mm
- Double insulation 



Dimensions

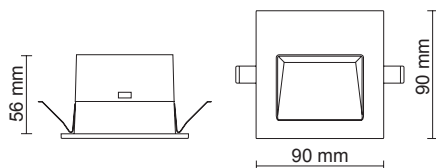


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9312 at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9312	240/50	1.2	100	3000	> 80	80°	No	White


AMBIENCE S9313 - 1W

Stylish interior wall mount LED luminaire

Application


Residential hallways, bedrooms, stairways

Design Specifications

- Square aluminum face profile, powder coat white finish
- Integral 240V, 1.2W control gear
- CCT 3000K, 100lm
- IP54 front only
- Cut out: 77 x 77mm
- Double insulation 



Dimensions

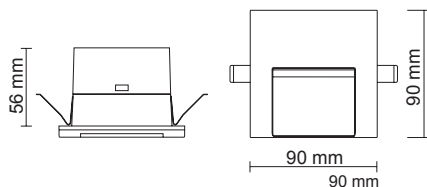


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9313 at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9313	240/50	1.2	100	3000	> 80	80°	No	White

DARHAM SQUARE S9316 - 1.5W

LED 1.5 watt recessed square
profile wall luminaire


Application

Ideal for any residential stairs, walkways or
commercial interior space

Design Specifications

- Durable die-cast aluminium body profile
- Quality white powder coat finish or anodized silver
- High efficiency SMD LED chips
- Opal acrylic diffuser with glass cover
- Suitable drivers - PLUTO EGL12V/6W PLUTO 15DV, 30DV, 50DV
- 12V AC or DC driver required
- Optional accessories, pre-install box for S9316 only (L x W x H: 218 x 133 x 74mm)

Dimensions

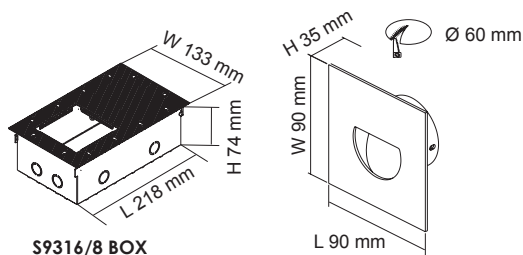


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9316 at 3000K



Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
S9316 WH	12V AC/DC	1.5	110	3000	> 80	No	White
S9316 ALU	12V AC/DC	1.5	110	3000	> 80	No	Anodized Silver

For terms and conditions of catalogue data use, refer to INDEX

DARHAM ROUND S9317 - 1.5W

LED 1.5 watt recessed round profile wall luminaire

Application


Ideal for any residential stairs, walkways or commercial interior space

Design Specifications

- Durable die-cast aluminium body profile
- Quality white powder coat finish or anodized silver
- High efficiency SMD LED chips
- Opal acrylic diffuser with glass cover
- Suitable drivers - PLUTO EGL12V/6W PLUTO 15DV, 30DV, 50DV
- 12V AC or DC driver required



Dimensions




Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270

S9317 at 3000K



Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
S9317 WH	12V AC/DC	1.5	110	3000	> 80	No	White
S9317 ALU	12V AC/DC	1.5	110	3000	> 80	No	Anodized Silver

For terms and conditions of catalogue data use, refer to INDEX

Linked in YouTube



LEEMAN S9318 - 1.5W

LED 1.5 watt recessed square profile wall luminaire

Application


Residential stairs, walkways and interior commercial features

Design Specifications

- Durable aluminium body profile
- Quality matt white powder coat finish or anodized silver
- High efficiency SMD LED chips, CCT 3000K, beam distribution 86°
- Frosted glass diffuser
- Suitable drivers - PLUTO EGL12V/6W PLUTO 15DV, 30DV, 50DV
- 12V AC or DC driver required
- Optional accessories, pre-install box for S9318 only (L x W x H: 218 x 133 x 74mm)



Dimensions

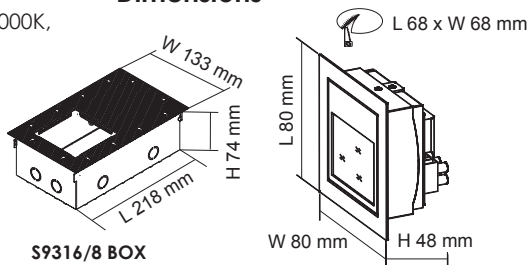


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270

S9318 at 3000K



Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
S9318 AS	12V AC/DC	1.5	70	3000	> 80	86°	Anodized Silver
S9318 MW	12V AC/DC	1.5	70	3000	> 80	86°	Matt White

For terms and conditions of catalogue data use, refer to INDEX

LEEMAN MINI S9319 - 1.5W

LED 1.5 watt recessed MINI square profile wall luminaire

Application


Residential stairs, walkways and commercial features

Design Specifications

- Durable aluminium body profile
- Quality white powder coat finish or anodised silver
- High efficiency SMD LED chips, CCT 3000K, beam distribution 86°
- Frosted glass diffuser
- Suitable drivers - PLUTO EGL12V/6W
PLUTO 15DV, 30DV, 50DV
- 12V AC or DC driver required



Dimensions




Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270

S9319 at 3000K



Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
S9319 AS	12V AC/DC	1.5	70	3000	> 80	86°	Anodized Silver
S9319 MW	12V AC/DC	1.5	70	3000	> 80	86°	Matt White

For terms and conditions of catalogue data use, refer to INDEX

Linked in YouTube




AMBIENCE S9314 - 1W

Stylish interior wall mount LED luminaire

Application


Residential hallways, bedrooms, stairways

Design Specifications

- Square aluminum face profile, powder coat white finish
- Integral 240V, 1.2W control gear
- CCT 3000K, 100lm
- IP54 front only
- Cut out: 77 x 77mm
- Double insulation 



Dimensions

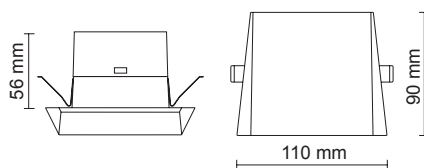


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270

S9314 at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9314	240/50	1.2	100	3000	> 80	80°	No	White

CLASSIC RING SPL3100 - 45W/67W

Designer LED pendant luminaire

Application

A creative design for residential or commercial space

Design Specifications

- Polyurethane body, colour white
- Opal acrylic diffuser
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver, 45 or 67 watt models




Performance

Dimmable Driver - No



Dimensions

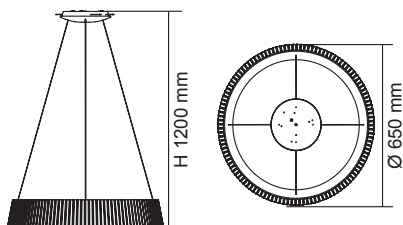

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
SPL3100/64	240/50	45	2250	3000	> 80	60°	No	White
SPL3100/84	240/50	67	3300	3000	> 80	60°	No	White

For terms and conditions of catalogue data use, refer to INDEX

HALO SO3000 - 18W/35W

Dimmable architectural LED ceiling luminaire

Application


A creative design for residential or commercial spaces

Design Specifications

- Slim disc like appearance, 18 or 35 watt models
- Durable polycarbonate body profile with opal acrylic diffuser
- Simple twist lock installation mechanism
- High efficiency SMD LED chips
- CCT 4000K standard, optional 3000K
- Integral constant current trailing edge dimmable LED driver
- Trim standard black



Dimensions



Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge




Photometric Data

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270

SO3000/30CW at 4000K

SO3000/40CW at 4000K

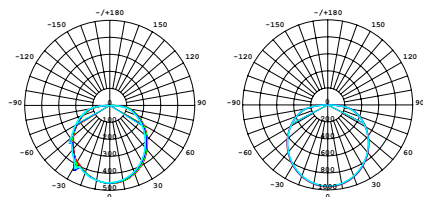

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour	Dimensions (D x H mm)
SO3000/30CW	240/50	18	1450	4000	> 80	Yes	Black	Ø 300 x 51
SO3000/40CW	240/50	35	3300	4000	> 80	Yes	Black	Ø 400 x 68

For terms and conditions of catalogue data use, refer to INDEX

HALO SPL3000 - 18W/35W

Dimmable architectural LED pendant luminaire

Application

A creative design for residential or commercial spaces

Design Specifications



- Slim disc like appearance, 18 or 35 watt models
- Durable polycarbonate body profile with opal acrylic diffuser
- High efficiency SMD LED chips, 18 or 35 watt models
- Integral constant current trailing edge dimmable LED driver
- Suspension kits provided (standard length 1.5 m and adjustable)
- CCT 4000K standard, 3000K for 40 watt model

Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge

Dimensions

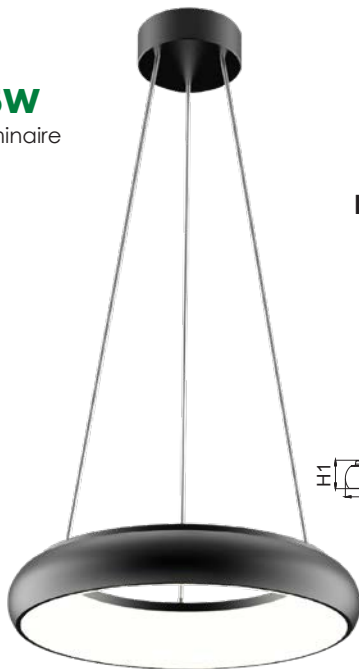



Photometric Data

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270

SPL3000/30CW at 4000K

SPL3000/40CW at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour	Dimensions (D1 x H1, D2 x H2 mm)
SPL3000/30CW	240/50	18	1450	4000	> 80	Yes	Black	Ø 300 x 51, Ø 100 x 25
SPL3000/40CW	240/50	35	3300	4000	> 80	Yes	Black	Ø 400 x 68, Ø 130 x 35
SPL3000/40WW	240/50	35	3300	3000	> 80	Yes	Black	Ø 400 x 68, Ø 130 x 35

For terms and conditions of catalogue data use, refer to INDEX

Linked in YouTube



FLAT SL2110 - 5W/30W

Dimmable profile ceiling luminaires

Application


A creative design for residential or commercial spaces, with a selection of 5, 12, 18 or 30 watt models

Design Specifications

- Seamless surface mounting base
- Robust polycarbonate diffuser, luminaire colour white
- Simple twist lock installation mechanism for the surface mount model. Pendant includes surface mount cap and three (3) x 1.5M adjustable stainless cables
- Integral constant current trailing edge dimmable LED driver
- CCT 4000K as standard, optional 3000K or 6000K



Dimensions



Performance

Dimmable Driver - Yes


Dimmer Type - Trailing edge




Photometric Data

Unit: cd C0/C180 — C90/C270

SL2110/10CW at 4000K



SL2110/50CW at 4000K



For terms and conditions of catalogue data use, refer to INDEX

SL2110/10CW



SL2110/20CW



SL2110/30CW



SL2110/40CW



Colour temperature

- 4000K Cool White (Standard)
- 3000K Warm White (Option)
- 6000K Daylight (Option)

Installation Options

- SL2110/30, SL2110/40:
Suspension kits included,
(standard length 1.5m and adjustable)



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour	Dimensions (D x H mm)
SL2110/10CW	240/50	5	180	4000	> 80	Yes	White	Ø 100 x 50
SL2110/20CW	240/50	12	780	4000	> 80	Yes	White	Ø 160 x 50
SL2110/30CW	240/50	18	1200	4000	> 80	Yes	White	Ø 260 x 60
SL2110/40CW	240/50	30	2300	4000	> 80	Yes	White	Ø 350 x 60

PIP SPL020 - 5W

Ultra slim 5 watt architectural pendant luminaire

Application

A creative design for residential or commercial spaces


Design Specifications

- Ultra Slimline suspended tube profile, Ø30mm, choice of two body profile lengths to select
- Flush recessed ceiling plate to suit a standard Ø72 mm cut out
- Durable aluminium body profile, choice of black or white finish
- High efficiency COB LED chips, 160 lm
- Recessed downlight mounting installation with standard adjustable wire length up to 1.2 m

Performance

Dimmable Driver - No

Dimensions

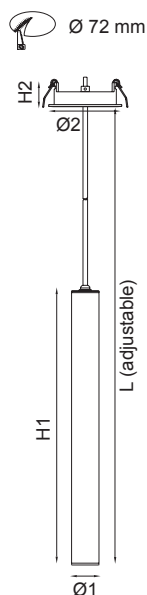

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (Ø1 x H1, Ø2 x H2 mm)
SPL020WW45	240/50	5	160	3000	> 80	25°	White	30 x 450, 80 x 26
SPL020WW45BK	240/50	5	160	3000	> 80	25°	Black	30 x 450, 80 x 26

For terms and conditions of catalogue data use, refer to INDEX

UNITREK SPL9017 - 9W

Dimmable 9 watt LED pendant luminaire

Application

A creative design for residential or commercial spaces

Design Specifications

- Architectural cylindrical profile, standard colour black, optional white
- Durable aluminium body profile
- High efficiency COB LED chips, with polycarbonate optical lens, beam distribution 60°, CRI>80, 25° and 40° options
- Changeable multi-faceted reflector system, CRI>90 options available
- Integral constant current trailing edge dimmable LED driver
- Standard adjustable wire length up to 1.2 m

Performance


Dimmable Driver - Yes

Dimmer Type - Trailing edge



Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (Ø1 x H1, Ø2 x H2 mm)
SPL9017WW/WH	240/50	9	700	3000	> 80	60°	White	65 x 260, 65 x 32
SPL9017WW/BK	240/50	9	700	3000	> 80	60°	Black	65 x 260, 65 x 32
SPL9017CW/WH	240/50	9	800	4000	> 80	60°	White	65 x 260, 65 x 32
SPL9017CW/BK	240/50	9	800	4000	> 80	60°	Black	65 x 260, 65 x 32
SPL9017DL/WH	240/50	9	800	6000	> 80	60°	White	65 x 260, 65 x 32
SPL9017DL/BK	240/50	9	800	6000	> 80	60°	Black	65 x 260, 65 x 32

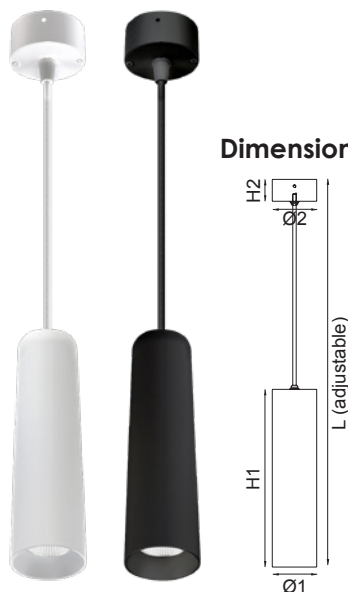

Photometric Data

Unit: cd C0/C180 — C90/C270

SPL9017WW at 3000K



RING SPL3200 - 17W/ 30W

Decorative multi - ring pendant LED luminaire

Application

Ideal for decorative interior designs

Design Specifications

- Aluminium circular body frame, colour black
- Opal acrylic diffuser
- High efficiency SMD LED design
- CCT 3000K, CRI>80
- Constant current non-dimmable driver
- Choice of 17, 23, 30 watt models




Performance

Dimmable Driver - No



Dimensions

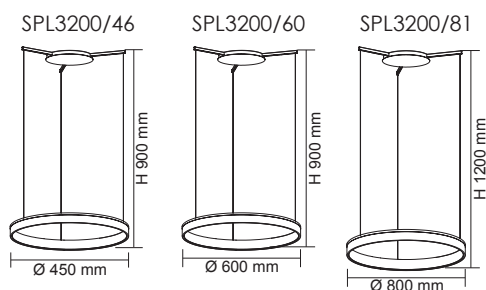

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
SPL3200/46	240/50	17	900	3000	> 80	25°	No	Black
SPL3200/60	240/50	23	1200	3000	> 80	25°	No	Black
SPL3200/81	240/50	30	1500	3000	> 80	25°	No	Black

For terms and conditions of catalogue data use, refer to INDEX

PIXIE WITH BLUETOOTH MESH TECHNOLOGY



PIXIE




PIXIE
PLUS

CUBE II S9320 - 10W

LED 10 watt surface mount CUBE wall luminaire

Application


Ideal for any residential or commercial interior or exterior space

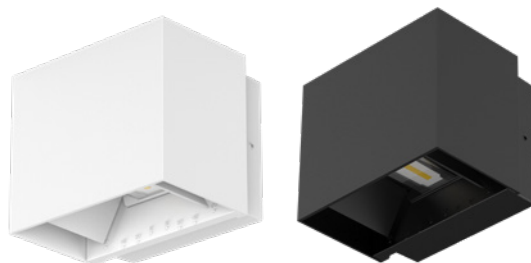

Design Specifications

- Durable aluminium body profile, colour white & black
- Quality powder coat finish
- High efficiency SMD LED chips
- Independent up & down beam angle adjustable from 0° to 60°
- Integral constant current non-dimmable LED driver
- Indirect illumination optical performance

Dimensions

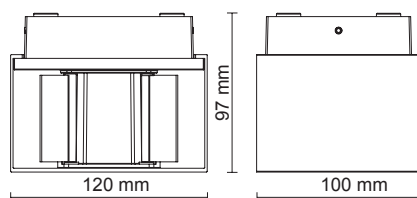


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C30/C210
C60/C240 — C90/C270


S9320WW at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
S9320WW/WH	240/50	10	750	3000	> 80	No	White
S9320WW/BK	240/50	10	750	3000	> 80	No	Black
S9320NDL/WH	240/50	10	900	5000	> 80	No	White
S9320NDL/BK	240/50	10	900	5000	> 80	No	Black

For terms and conditions of catalogue data use, refer to INDEX

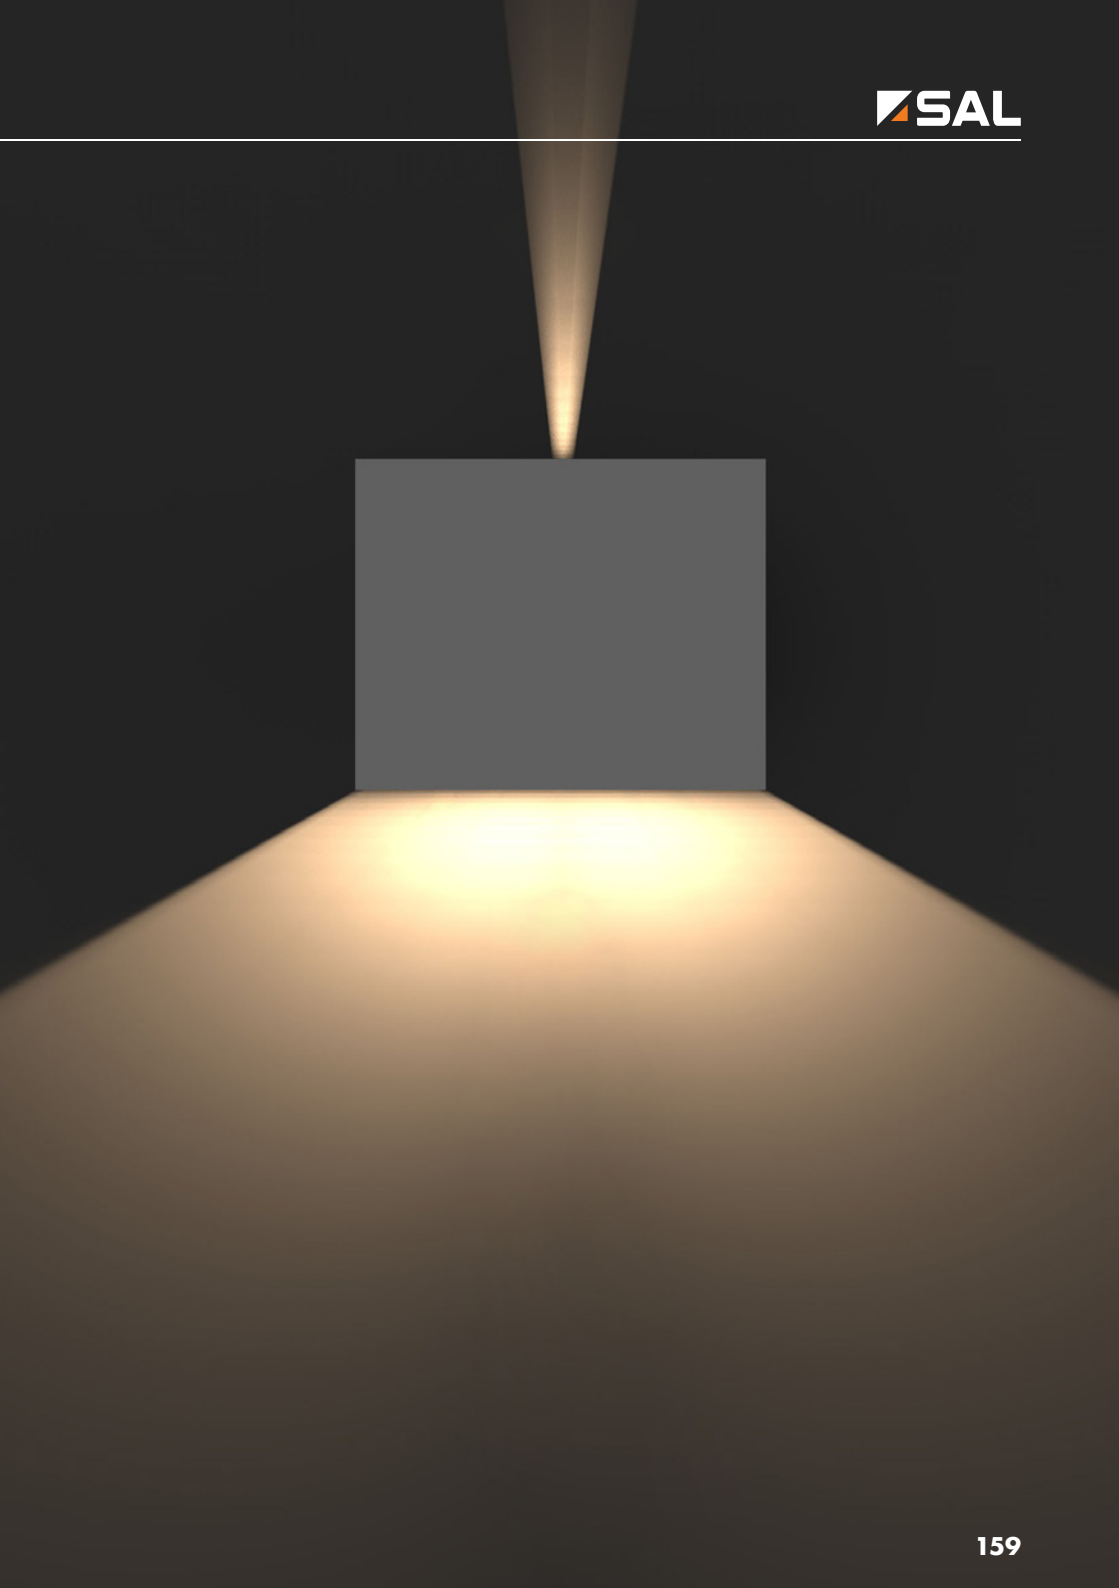

LOUNGE III S9327 - 10W/18W

10/18 watt decorative IP54 architectural
LED wall mount luminaire

Application

Ideal for any residential or commercial
interior or exterior space

Design Specifications

- Durable aluminium body profile
- Quality white or black powder coat finish
- High efficiency SMD LED chips
- Indirect illumination optical performance
- Integral constant current non-dimmable driver

S9327/150 BK




S9327/150 WH



S9327/300 BK



S9327/300 WH

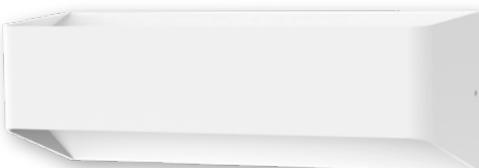

Performance


Dimmable Driver - No




Photometric Data


Unit: cd C0/C180 — C90/C270 —

S9327/300WW at 3000K




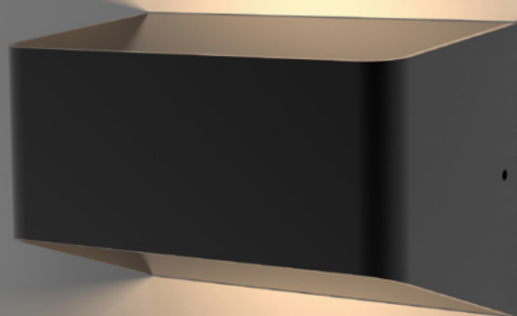

Dimensions



S9327/150

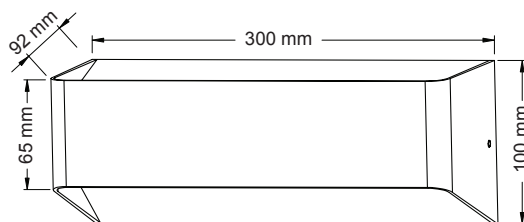

S9327/300

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (L x W x H mm)
S9327/150WW/WH	240/50	10	400	3000	> 80	White	150 x 100 x 92
S9327/150WW/BK	240/50	10	400	3000	> 80	Black	150 x 100 x 92
S9327/150NDL/WH	240/50	10	500	5000	> 80	White	150 x 100 x 92
S9327/150NDL/BK	240/50	10	500	5000	> 80	Black	150 x 100 x 92
S9327/300WW/WH	240/50	18	720	3000	> 80	White	300 x 100 x 92
S9327/300WW/BK	240/50	18	720	3000	> 80	Black	300 x 100 x 92
S9327/300NDL/WH	240/50	18	900	5000	> 80	White	300 x 100 x 92
S9327/300NDL/BK	240/50	18	900	5000	> 80	Black	300 x 100 x 92

For terms and conditions of catalogue data use, refer to INDEX

LOUNGE II S9328 TC - 9W/15W

9/15 watt decorative IP54 architectural LED wall mount luminaire, with selectable colour temperature

Application


A decorative architectural solution for residential & commercial interior or exterior space



Design Specifications

- Convenient TC selectable colour temperature, 3000K/4000K/5000K
- Durable white or black powder coated finish
- Integral non-dimmable control gear
- Robust die-cast aluminium body profile
- High efficiency SMD LED chips
- Indirect illumination optical performance

Dimensions

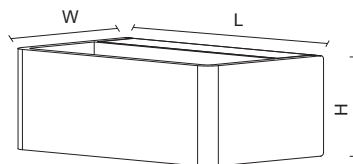

Performance


Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9328/150TC at 3000K

S9328/220TC at 5000K

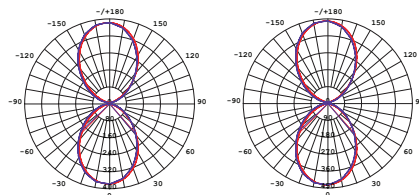

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (L x W x H mm)
S9328/150TC/WH	240/50	9	500/600/550	3000/4000/5000	> 80	White	150 x 90 x 55
S9328/150TC/BK	240/50	9	500/600/550	3000/4000/5000	> 80	Black	150 x 90 x 55
S9328/220TC/WH	240/50	15	800/1000/900	3000/4000/5000	> 80	White	220 x 90 x 55
S9328/220TC/BK	240/50	15	800/1000/900	3000/4000/5000	> 80	Black	220 x 90 x 55

For terms and conditions of catalogue data use, refer to INDEX

ALTONA-S PLUS SE7358 - 5W

LED 5 watt surface mount square profile wall luminaire

Application


Residential stairs, walkways and interior commercial features



Design Specifications

- Durable aluminium body profile
- Quality matt black powder coat finish
- High efficiency SMD LED chips
- CCT 3000K or 5000K
- Beam distribution 70°
- Integral control gear

Dimensions

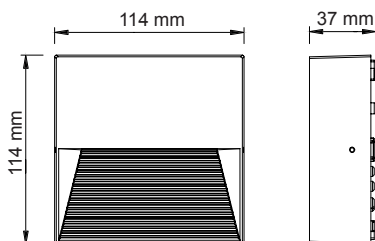


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270 —

SE7358 at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SE7358WW/BK	240/50	5	150	3000	> 80	70°	Black	114 x 114 x 37
SE7358NDL/BK	240/50	5	220	5000	> 80	70°	Black	114 x 114 x 37

For terms and conditions of catalogue data use, refer to INDEX






ALTONA SE7356 - 5W

LED 5 watt surface mount circular profile wall luminaire


Application

Residential stairs, walkways and interior commercial features

Design Specifications

- Durable aluminium body profile
- Quality matt black powder coat finish
- High efficiency SMD LED chips
- CCT 3000K or 5000K
- Beam distribution 70°
- Integral LED control gear

Dimensions

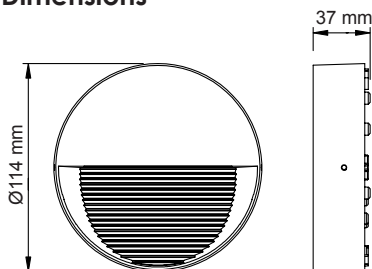


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270

SE7356WW at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7356WW/BK	240/50	5	150	3000	> 80	70°	Black	Ø114 x 37
SE7356NDL/BK	240/50	5	220	5000	> 80	70°	Black	Ø114 x 37

For terms and conditions of catalogue data use, refer to INDEX

ALTONA PLUS SE7357 - 8W

LED 8 watt surface mount circular
profile wall luminaire


Application

Residential stairs, walkways and interior
commercial features

Design Specifications

- Durable aluminium body profile
- Quality matt black powder coat finish
- High efficiency SMD LED chips
- CCT 3000K or 5000K
- Beam distribution 70°
- Integral LED control gear

Dimensions

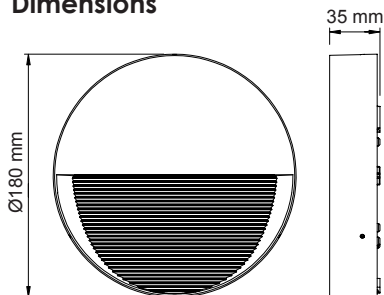


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270 —

SE7357WW at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7357WW/BK	240/50	8	350	3000	> 80	70°	Black	Ø180 x 35
SE7357NDL/BK	240/50	8	500	5000	> 80	70°	Black	Ø180 x 35

For terms and conditions of catalogue data use, refer to INDEX

Linked in YouTube



UD S9356 - 3W/12W

Adjustable LED surface mount profile wall luminaires

Application

Ideal for any residential or commercial interior space

Design Specifications

- Durable aluminium body profile
- Quality white powder coat finish
- High efficiency SMD LED chips, 3000K
- Up & Down beam angle adjustable from 0° to 120°
- Integral constant current non-dimmable LED driver, choice of 3 or 12 watt models



S9356/160WW/WH

Performance

Dimmable Driver - Optional, trailing edge refer model selection




Dimensions

S9356/160WW/WH





S9356/610WW/WH



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
S9356/160WW/WH	240/50	3	250	3000	> 80	No	White
S9356/610WW/WH	240/50	12	800	3000	> 80	Optional	White

For terms and conditions of catalogue data use, refer to INDEX

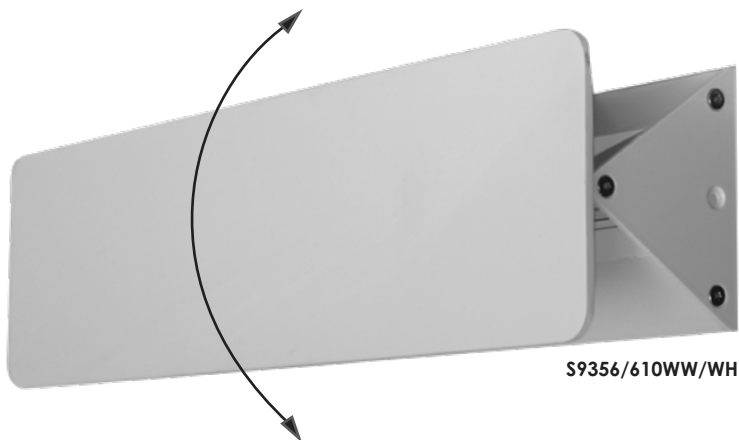

Terms and conditions of catalogue data use:

1. Copyright SAL National Pty Ltd 2021
2. Compliances, installation and operations reflect product use in the region of Australia (and New Zealand for products listed on www.sal.co.nz).
3. All data and images contained within remain the property of SAL National Pty Ltd, or as acknowledged by the provider.
4. Trademarks shown remain the property of the relevant brand, company or third party. SAL, PIXIE PLUS and PIXIE are trademarks of SAL National.
5. Images, tones and finishes shown are for guidance only and may vary from the actual product, which if critical to the installation must be confirmed at order placement.
6. Due to continued product specification, standards and information updates, product data sourced from this document shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order.
7. For INTERIOR products, the designated IP rating is "from below the ceiling" unless otherwise specified.
8. SAL products are designed in accordance with all relevant and mandatory International and Australian Standards, which require installation by a qualified installer in accordance AS/NZS3000 and the manufacturers installation instructions, which require regular cleaning and maintenance of the equipment.
9. Product sales arising from this publication are sold in accordance with SAL standard terms and conditions of sale, available via www.sal.net.au and www.sal.co.nz where relevant.
10. Due to continued product and regulative developments, validation of ANY sustainable rebate program product accreditation, must be confirmed prior to purchase via the relevant authority's web site.

