




SINCE 1998

SMARTER LIGHTING CHOICES


SINCE 1998



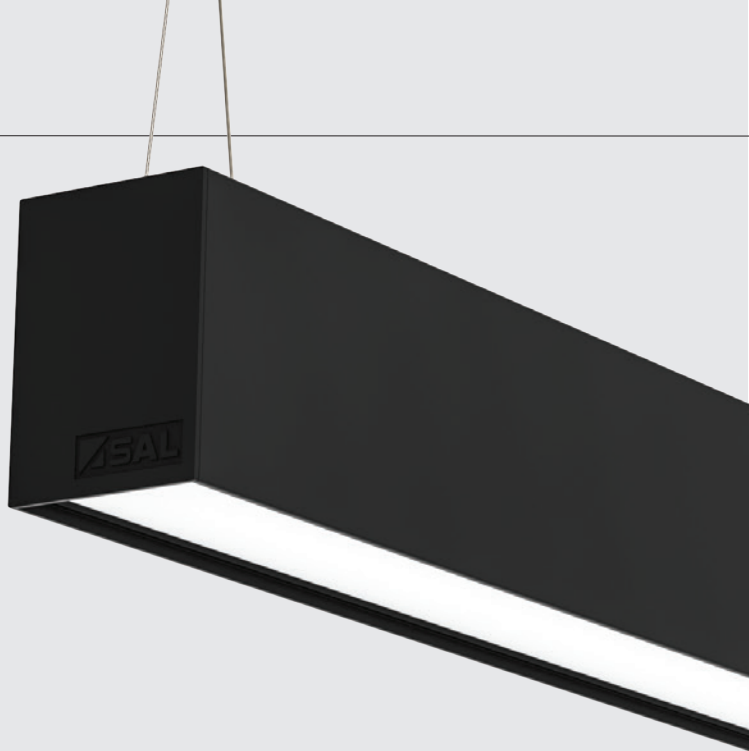

LED LINEAR BATTENS & PROFILES

An extensive range of LED battens and LED interior linear profiles, with a wide selection of colour temperature and installation choices.

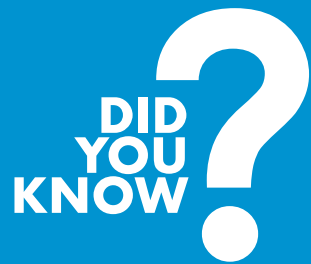

DID
YOU
KNOW?

Why is the IP rating important? In brief, IP (Ingress Protection) ratings are defined in EN 60529 and simply defines the ability of an electrical product to seal and protect against the intrusion of foreign objects and water.

(I) being the first numeral stands for intrusion of a foreign object, where (P) being the second numeral stands for the intrusion of moisture.

As a guide IP20 rated products would be seen in interior spaces with no requirement for protection against the elements, where an IP65 product would be found in an exterior application which required substantial protection against the elements.

Need more information on IP ratings? Check out the SAL web FAQ's or speak to your local SAL team member.

For Interior products, the designated IP rating is "from below the ceiling" unless otherwise specified.




SLIMLINE SEAMLESS TC LINKABLE SL9706 - 4W/22W

TC SEAMLESS SLIMLINE

Application

Great for commercial shop spaces, home pantries, walk-in wardrobes

Design Specifications

- Selectable colour temperature 3000K, 4000K, 5500K, beam distribution 105°, CRI >80
- Polycarbonate body profile and opal diffuser
- Integral constant current non-dimmable driver
- Individual switch control, plug and play flex and plug included
- Accessories: SL9706/32CM LINK (L 320mm)
SL9706/76CM LINK (L 760 mm)
- Double insulation 



SL9706/280TC

Performance

Dimmable Driver - No



Dimensions

L 280 mm



H 36 mm



W 23 mm

SL9706/280

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
SL9706/280TC	240/50	4	300/380/300	3000/4000/5500	> 80	105°	No	White
SL9706/540TC	240/50	9	750/800/750	3000/4000/5500	> 80	105°	No	White
SL9706/840TC	240/50	13	1050/1200/1050	3000/4000/5500	> 80	105°	No	White
SL9706/1140TC	240/50	18	1550/1600/1600	3000/4000/5500	> 80	105°	No	White
SL9706/1440TC	240/50	22	1800/2000/1800	3000/4000/5500	> 80	105°	No	White

For terms and conditions of catalogue data use, refer to INDEX

SL9706/540TC

SL9706/840TC

SL9706/1140TC

SL9706/1440TC



Dimensions

L 540 mm



H 36 mm

W 23 mm

SL9706/540

L 1140 mm



H 36 mm

W 23 mm

SL9706/1140

L 840 mm



H 36 mm

W 23 mm

SL9706/840

L 1440 mm



H 36 mm

W 23 mm

SL9706/1440

Maximum connections

Mixed connections maximum 240W

SL9706/280TC	1	2	3	4...	55pcs
SL9706/540TC	1	2	3	4...	25pcs
SL9706/840TC	1	2	3	4...	17pcs
SL9706/1140TC	1	2	3	4...	12pcs
SL9706/1440TC	1	2	3	4...	10pcs

BLADE SL9707 TC - 20W/40W

LED low profile batten with selectable colour temperature

Application

Conventional LED profile battens for commercial service spaces

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Extruded aluminium body with plastic end cap and rear cable channel allowing easy wiring
- Quality white powder coat finish
- Integral constant current non-dimmable LED driver, 20 or 35 or 40 watt
- Robust opal polycarbonate diffuser
- High efficiency SMD LED chips, CRI >80, 120° beam


Performance

Dimmable Driver - No



SL9707/60TC


Dimensions




Photometric Data

Unit: cd C0/C180 — C90/C270

SL9707/60TC at 3000K



SL9707/120TC at 5700K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimension L x W x H (mm)
SL9707/60TC	240/50	20	1800/1900/1850	3000/4000/5700	120°	White	597 x 80 x 35
SL9707/120TC	240/50	35	3300/3500/3400	3000/4000/5700	120°	White	1197 x 80 x 35
SL9707/150TC	240/50	40	4000/4600/4400	3000/4000/5700	120°	White	1485 x 80 x 35

For terms and conditions of catalogue data use, refer to INDEX

SL9707/120TC

SL9707/150TC

DIP switch

TC SELECTABLE COLOUR

WARM WHITE 3000K	COOL WHITE 4000K	DAYLIGHT 5700K
----------------------------	----------------------------	--------------------------

Rear cable channel

BLADE SL9709 TC - 25W/55W

LED low profile batten with selectable colour temperature

Application

Conventional LED profile battens for commercial service spaces

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Extruded aluminium body with plastic end cap with a rear cable channel allowing easy wiring
- Quality white powder coat finish
- Integral constant current non-dimmable LED driver, 25 or 48 or 55 watt
- Robust opal polycarbonate diffuser
- High efficiency SMD LED chips, CRI >80, 120° beam

Performance

Dimmable Driver - No




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimension L x W x H (mm)
SL9709/60TC	240/50	25	2200/2600/2400	3000/4000/5700	120°	White	613 x 120 x 35
SL9709/120TC	240/50	48	4400/5000/4800	3000/4000/5700	120°	White	1213 x 120 x 35
SL9709/150TC	240/50	55	5600/6200/6000	3000/4000/5700	120°	White	1485 x 120 x 35



SL9709/60TC


Dimensions

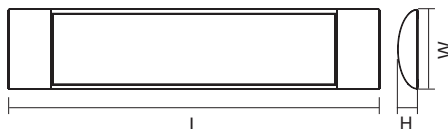


Photometric Data

Unit: cd C0/C180 — C90/C270

SL9709/60TC at 3000K



SL9709/120TC at 5700K



SL9709/120TC

SL9709/150TC

DIP switch

TC SELECTABLE COLOUR

WARM WHITE 3000K	COOL WHITE 4000K	DAYLIGHT 5700K
----------------------------	----------------------------	--------------------------

Rear cable channel

LEDLINE SLD2000 - 20W

LED diffused batten 20 watt

Application

Conventional LED linear surface mount battens for commercial service spaces

Design Specifications

- Pressed steel body profile
- Quality white powder coat finish with an opal PMMA diffuser
- High efficiency SMD LED chips, CRI >80, 4000K
- Integral constant current non-dimmable LED driver 20 watt
- Dimming and sensor options available
- Large terminal block, easy installation
- Unique diffuser design allows end to end installation, emergency options available compliant to AS/NZS 2293
- corridorSTANDBY options available

Performance

Dimmable Driver - Optional

Dimmer Type - Trailing edge, 1-10V, DALI / DSI




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour	Dimensions (L x W x H mm)
SLD2000CW	240/50	20	1900	4000	> 80	120°	Optional	White	600 x 100 x 77
SLD2000CW/C	240/50	20	1900	4000	> 80	120°	Optional	White	600 x 100 x 77




Dimensions

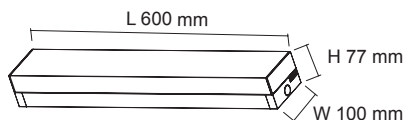

Photometric Data

Unit: cd C0/C180 — C90/C270 —

SLD2000CW at 4000K



LEDLINE SLD4000 - 40W

LED diffused batten 40 watt

Application

Conventional LED linear surface mount battens for commercial service spaces

Design Specifications

- Pressed steel body profile
- Quality white powder coat finish with an opal PMMA diffuser
- High efficiency SMD LED chips, CRI >80, 4000K
- Integral constant current non-dimmable LED driver 40 watt
- Dimming and sensor options available
- Large terminal block, easy installation
- Unique diffuser design allows end to end installation, emergency options available compliant to AS/NZS 2293
- corridorSTANDBY options available

Performance

Dimmable Driver - Optional

Dimmer Type - Trailing edge, 1-10V, DALI / DSI




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour	Dimensions (L x W x H mm)
SLD4000CW	240/50	40	3800	4000	> 80	120°	Optional	White	1120 x 100 x 77
SLD4000CW/C	240/50	40	3800	4000	> 80	120°	Optional	White	1120 x 100 x 77




Dimensions



Photometric Data

Unit: cd C0/C180 — C90/C270 —

SLD4000CW at 4000K



ECOLINE SL9732 - 20W/50W

LED narrow diffused batten with selectable colour temperature and dual power

Application

Conventional linear LED batten products for commercial service spaces

Design Specifications

- 65 mm narrow steel body
- Quality white powder coat finish with a robust polycarbonate diffuser
- Large terminal block, easy installation
- Easy selectable colour temperature with an inbuilt DIP switch 3000K/4000K/5700K (SL9732/TC/DP)
- High efficiency (>125lm/W) SMD LED, CRI >80, 120° beam distribution
- Integral constant current non-dimmable LED driver with selectable power
- Emergency options available compliant to AS/NZS2293
- corridorSTANDBY options available
- 50 watt model available for NZ only

Performance

Dimmable Driver - Optional

Dimmer Type - Trailing edge, 1-10V, DALI / DSI




SL9732/20TC




SL9732/40TC

Dimensions



SL9732/20TC





SL9732/40TC

Photometric Data

Unit: cd C0/C180 — C90/C270

SL9732/20TC/DP2 at 4000K SL9732/40TC/DP2 at 4000K



For terms and conditions of catalogue data use, refer to INDEX



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
SL9732/20CW2	240/50	20	2500	4000	> 80	120°	Optional	White
SL9732/20DL2	240/50	20	2500	5700	> 80	120°	Optional	White
SL9732/20TC/C	240/50	20	2465/2650/2670	3000/4000/5700	> 80	120°	No	White
SL9732/20TC/DP2	240/50	12/20	<u>1540/1630/1680</u> 2465/2650/2670	3000/4000/5700	> 80	120°	Optional	White
SL9732/40CW2	240/50	40	5000	4000	> 80	120°	Optional	White
SL9732/40DL2	240/50	40	5000	5700	> 80	120°	Optional	White
SL9732/40TC/C	240/50	40	4800/5180/5230	3000/4000/5700	> 80	120°	No	White
SL9732/40TC/DP2	240/50	24/40	<u>3130/3330/3410</u> 4800/5180/5230	3000/4000/5700	> 80	120°	Optional	White
SL9732/50TC/DP2	240/50	30/50	<u>3900/4050/4180</u> 5910/6270/6330	3000/4000/5700	> 80	120°	No	White

For terms and conditions of catalogue data use, refer to INDEX

LED STD25 TC - 9W/36W

LED tube surface mount
diffused linear batten 9 - 36 watt

Application

Conventional linear LED batten profile ideal
for residential and commercial spaces

Design Specifications

- Durable metal body profile, white powder coat finish
- High efficiency LED T8 tubes included with selectable CCT 3000K/ 4000K/ 6000K, CRI >80
- Large terminal block, easy installation
- Safety HRC fuse installed
- High performance PMMA prism diffuser, beam distribution 120°
- Emergency and sensor option available




Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270 —

STD25/212TC at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
STD25/106TC	240/50	9	900/1100/1000	3000/4000/6000	120°	White	620 x 69 x 83
STD25/112TC	240/50	18	1800/2200/2000	3000/4000/6000	120°	White	1230 x 69 x 83
STD25/206TC	240/50	2 x 9	2 x 900/1100/1000	3000/4000/6000	120°	White	620 x 109 x 83
STD25/212TC	240/50	2 x 18	2 x 1800/2200/2000	3000/4000/6000	120°	White	1230 x 109 x 83

For terms and conditions of catalogue data use, refer to INDEX

STD TC TUBELINE DIFFUSE - 9W/36W

Conventional LED tube diffused
battens 9 - 36 watt

Application

Conventional LED tube interior battens ideal
for residential and commercial service spaces

Design Specifications

- Pressed steel base with PVC body
- Large terminal block, easy installation
- High efficiency LED T8 tubes fitted, beam distribution 120°, CRI >80, with selectable CCT lamps included, 3000K/4000K/6000K
- Safety HRC fuse installed
- Emergency and sensor option available
- Wire guard (STG series) option available

STD/106

STD/112

STD/206

STD/212


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 C90/C270

STD/212TC at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
STD/106TC	240/50	9	650/750/700	3000/4000/6000	120°	White	625 x 65 x 77
STD/112TC	240/50	18	1300/1500/1400	3000/4000/6000	120°	White	1225 x 65 x 77
STD/206TC	240/50	2 x 9	2 x 650/750/700	3000/4000/6000	120°	White	625 x 110 x 77
STD/212TC	240/50	2 x 18	2 x 1300/1500/1400	3000/4000/6000	120°	White	1225 x 110 x 77

For terms and conditions of catalogue data use, refer to INDEX



WIDELINE S9733L - 20W/65W

LED wide diffused batten 20 - 65 watt
with selectable colour temperature

Application

Low profile design suitable for residential
apartments and commercial service spaces

Design Specifications

- Wide pressed steel base with opal polycarbonate diffuser
- Quality white powder coated finish
- High efficiency SMD LED chips, CRI >80, beam distribution 120°
- Integral constant current non-dimmable LED driver
- Easy selectable colour temperature with an inbuilt DIP switch, CCT 3000K/4000K/5700K
- Large terminal block, easy installation

Performance

Dimmable Driver - No



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
S9733L/206TC	240/50	20	1800/2000/1800	3000/4000/5700	> 80	120°	White	610 x 160 x 60
S9733L/212TC	240/50	38	3700/3800/3700	3000/4000/5700	> 80	120°	White	1245 x 160 x 60
S9733L/215TC	240/50	65	5400/5800/5400	3000/4000/5700	> 80	120°	White	1500 x 160 x 60

For terms and conditions of catalogue data use, refer to INDEX

S9733L/206TC



S9733L/212TC




S9733L/215TC




Photometric Data

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270

S9733L/206TC at 3000K



S9733L/212TC at 5700K



PHOENIX S9775 - 30W

30 watt LED linkable with
1-10V dimmable functionality


Application

Decorative commercial service spaces,
meeting rooms, amenity areas

Design Specifications

- Extruded white finish aluminium profile with an opal polycarbonate diffuser
- High efficiency SMD LED chips, CRI >80, CCT 4000K as standard, optional 3000K/6000K
- Integral 1-10V dimmable LED driver
- Surface mounted or suspended (suspension kit required)
- Two mounting clips included
- Maximum connections 15 units

Dimensions

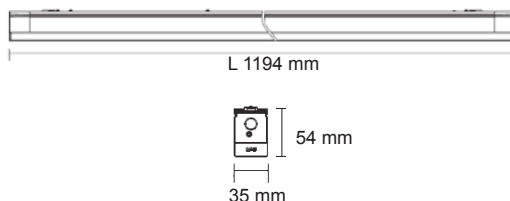

Performance


Dimmable Driver - Yes
Dimmer Type - 1-10V



Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9775CW at 4000K




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour	Dimensions (L x W x H mm)
S9775CW	240/50	30	2800	4000	> 80	120°	Yes	White	1194 x 35 x 54

For terms and conditions of catalogue data use, refer to INDEX



Maximum connections




S9775LP
L-shaped link bracket
(sold separately)



S9775IP
Straight link bracket
(sold separately)



SSI1512
Suspension wire unit
(sold separately)



"I" CONNECTION

TITAN S9776 - 40W/80W

40 or 80 watt LED connectable profile

Application


Decorative commercial applications, meeting rooms or amenity areas

Design Specifications


- Extruded aluminium profile colour white or black, with opal polycarbonate diffuser
- High efficiency SMD LED chips, CRI >80, beam distribution 90°, standard CCT 4000K, optional 3000K/6000K
- Integral constant current non-dimmable LED driver 40 or 80 watt
- Adjustable suspension kit included (2 x SSY1512),
- Accessory option - straight link (S9776IP)
- Surface mounted (allow min. 200 mm clearance at both ends)
- Loop in loop out cable duct

S9776/40CW

S9776/40CW/BK

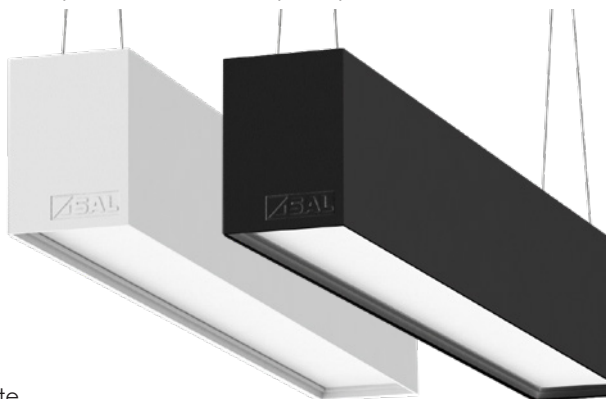

Dimensions

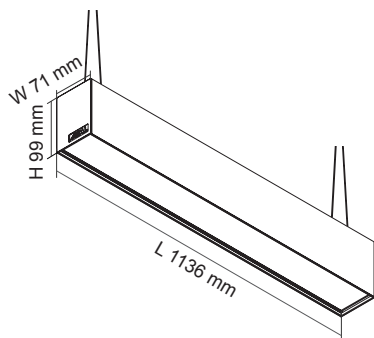

Performance

Dimmable Driver - Optional


Dimmer Type - Trailing edge, DALI / DSI



Photometric Data

Unit: cd C0/C180 — C90/C270 —


S9776/40CW at 4000K



For terms and conditions of catalogue data use, refer to INDEX

S9776/80CW

S9776/80CW/BK

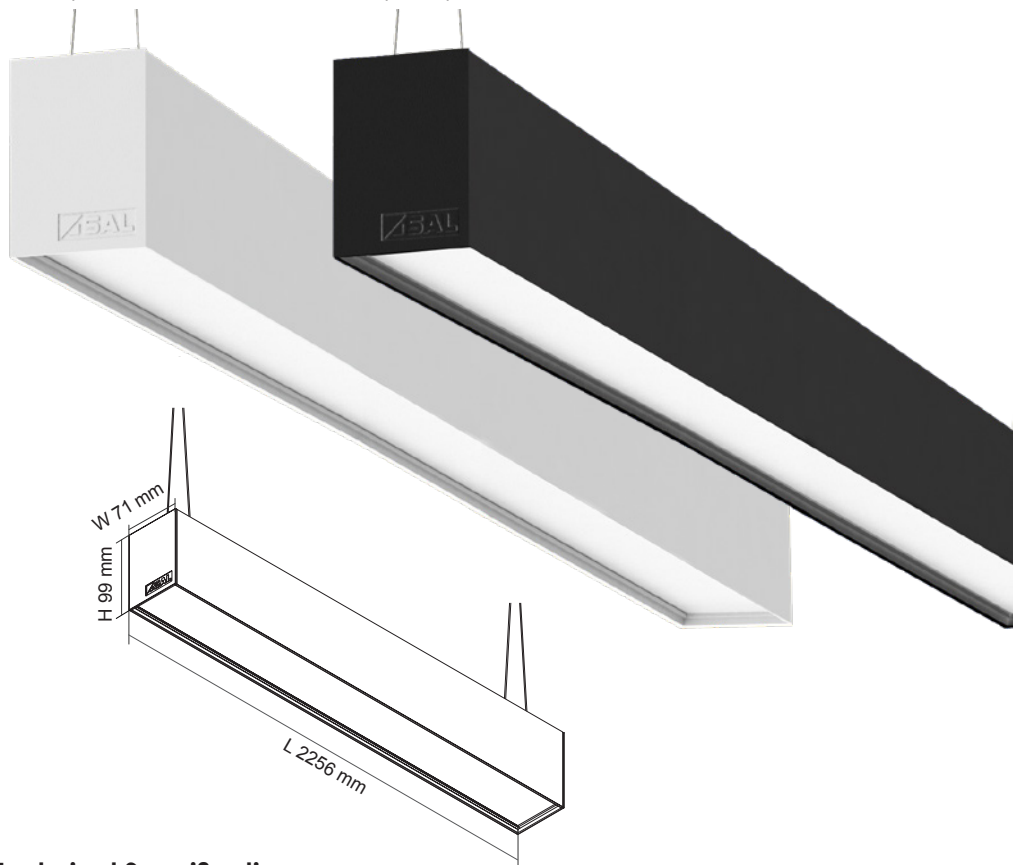

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour	Dimensions (L x W x H mm)
S9776/40CW	240/50	40	3000	4000	> 80	90°	Optional	White	1136 x 71 x 99
S9776/80CW	240/50	80	6000	4000	> 80	90°	Optional	White	2256 x 71 x 99
S9776/40CW/BK	240/50	40	3000	4000	> 80	90°	Optional	Black	1136 x 71 x 99
S9776/80CW/BK	240/50	80	6000	4000	> 80	90°	Optional	Black	2256 x 71 x 99

Terms and conditions of catalogue data use:

1. Copyright SAL National Pty Ltd 2021
2. Compliances, installation and operations reflect product use in the region of Australia (and New Zealand for products listed on www.sal.co.nz).
3. All data and images contained within remain the property of SAL National Pty Ltd, or as acknowledged by the provider.
4. Trademarks shown remain the property of the relevant brand, company or third party. SAL, PIXIE PLUS and PIXIE are trademarks of SAL National.
5. Images, tones and finishes shown are for guidance only and may vary from the actual product, which if critical to the installation must be confirmed at order placement.
6. Due to continued product specification, standards and information updates, product data sourced from this document shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order.
7. For INTERIOR products, the designated IP rating is "from below the ceiling" unless otherwise specified.
8. SAL products are designed in accordance with all relevant and mandatory International and Australian Standards, which require installation by a qualified installer in accordance AS/NZS3000 and the manufacturers installation instructions, which require regular cleaning and maintenance of the equipment.
9. Product sales arising from this publication are sold in accordance with SAL standard terms and conditions of sale, available via www.sal.net.au and www.sal.co.nz where relevant.
10. Due to continued product and regulative developments, validation of ANY sustainable rebate program product accreditation, must be confirmed prior to purchase via the relevant authority's web site.

