



**SINCE 1998**

# **SMARTER LIGHTING CHOICES**

**SINCE 1998**







The background image is a photograph of a modern car dealership interior. A long, brightly lit hallway with a grey carpet runs alongside a large glass wall. Through the glass, several cars are parked, including a light blue Mini Cooper. The ceiling is a drop ceiling with several rectangular LED light panels and troffers. The overall atmosphere is clean and professional.

## LED PANELS & TROFFERS

A comprehensive range of LED panels and troffers in a wide selection of sizes, colour temperature and operating options.

## PANEL S9784 TC/DP - 10W/40W

LED panel with selectable colour temperature and power


### Application

Designed for commercial and office space lighting tasks


### Design Specifications

- Extruded aluminium profile with high efficiency opal diffuser, suitable for a range of installation types
- Quality white powder coat finish
- High efficiency SMD LED chips, CRI >80
- FlickerCONTROLLED, remote constant current non-dimmable LED driver, complete with flex and plug
- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Suspended wire kits available
- Emergency models compliant to AS/NZS2293 with D50 spacing classification available, see Interior Emergency section.

S9784/312TC/DP

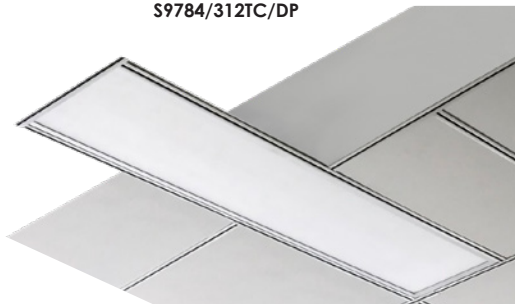

### Dimensions



### Performance

Dimmable Driver - Optional

Dimmer Type - Trailing edge  
(excluding S9784/612)  
1-10V, DALI / DSI




### Photometric Data

Unit: cd C0/C180 — C90/C270



S9784/312TC/DP at 4000K

S9784/606TC/DP at 5700K


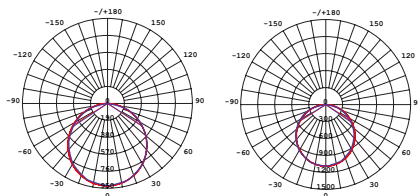


For interior products the IP rating stated is from below the ceiling



S9784/306TC/DP

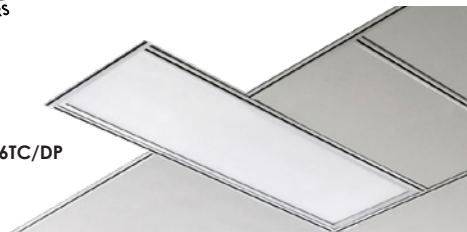

S9784/606TC/DP

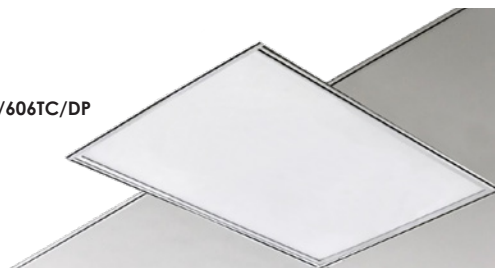

S9784/612TC/DP

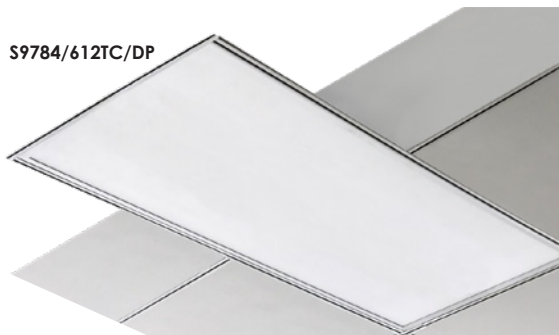

## Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
S9784/306TC/DP	240/50	$\frac{10}{18}$	$\frac{1100/1150/1100}{1900/2000/1900}$	3000/4000/5700	110°	White	595 x 295 x 32
S9784/606TC/DP	240/50	$\frac{16}{27}$	$\frac{1750/1850/1800}{2850/3000/2900}$	3000/4000/5700	110°	White	595 x 595 x 32
S9784/312TC/DP	240/50	$\frac{16}{27}$	$\frac{1750/1850/1800}{2850/3000/2900}$	3000/4000/5700	110°	White	1195 x 295 x 32
S9784/612TC/DP	240/50	$\frac{24}{40}$	$\frac{2850/3000/2900}{4500/4750/4600}$	3000/4000/5700	110°	White	1195 x 595 x 32





## PANEL S9784HE - 12W/34W


LED high efficacy panel

### Application


Commercial office environments

### Design Specifications

- Extruded aluminium profile with high efficiency opal diffuser
- Quality powder coat white finish
- High efficiency SMD LED (>125lm/W), CRI >80, beam distribution 110°
- FlickerCONTROLLED, remote constant current non-dimmable LED driver, complete with flex and plug
- Suspended wire kits available
- Emergency models compliant to AS/NZS2293 with D50 spacing classification available, see Interior Emergency section.

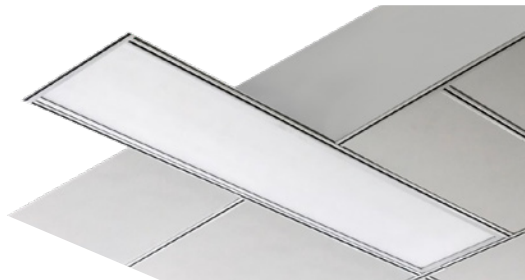

### Dimensions



### Performance


Dimmable Driver - Optional




### Photometric Data

Unit: cd C0/C180 — C90/C270

S9784HE312CW at 4000K



S9784HE606CW at 4000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
S9784HE306CW	240/50	12	1500	4000	> 80	110°	White	595 x 295 x 32
S9784HE606CW	240/50	24	3000	4000	> 80	110°	White	595 x 595 x 32
S9784HE312CW	240/50	24	3000	4000	> 80	110°	White	1195 x 295 x 32
S9784HE612CW	240/50	34	4250	4000	> 80	110°	White	1195 x 595 x 32

For terms and conditions of catalogue data use, refer to INDEX



## PANEL S9784U TC/DP - 10W/40W

LED High performance panel with selectable colour temperature and power


### Application

Designed for commercial and office space lighting tasks


### Design Specifications

- UGR<19 performance
- Extruded aluminium profile with high efficiency opal diffuser, suitable for a range of installation types
- Quality white powder coat finish
- High efficiency SMD LED chips, CRI >80
- FlickerCONTROLLED, remote constant current non-dimmable LED driver, complete with flex and plug
- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5000K
- Suspended wire kits available
- Emergency models compliant to AS/NZS2293 with D50 spacing classification available, see Interior Emergency section.

S9784U312TC/DP

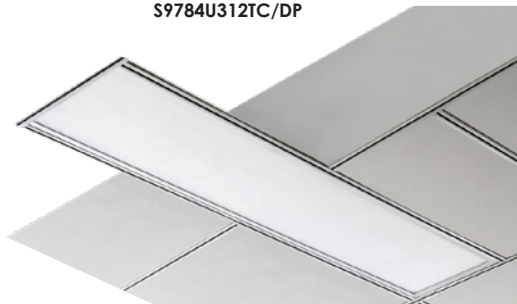

### Dimensions



### Performance

Dimmable Driver - Optional


Dimmer Type - Trailing edge  
(excluding S9784/612)  
1-10V, DALI / DSI




### Photometric Data

Unit: cd C0/C180 — C90/C270

S9784U312TC at 4000K





S9784U606TC at 5000K





For interior products the IP rating stated is from below the ceiling



S9784U306TC/DP

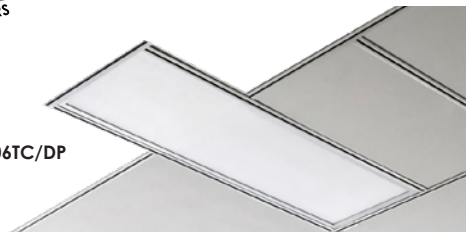

S9784U606TC/DP

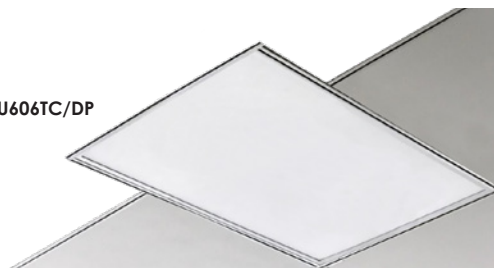

S9784U612TC/DP

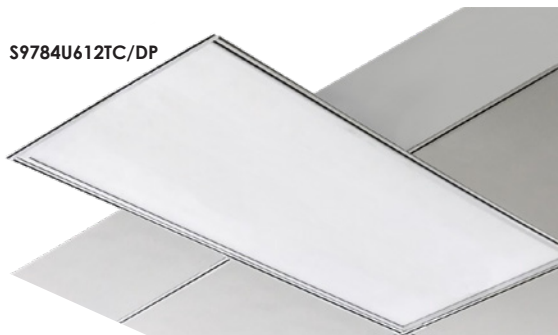

## Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
S9784U306TC/DP	240/50	$\frac{10}{18}$	$\frac{1050/1100/1050}{1800/1900/1800}$	3000/4000/5000	80°	White	595 x 295 x 32
S9784U606TC/DP	240/50	$\frac{16}{27}$	$\frac{1650/1750/1700}{2700/2850/2750}$	3000/4000/5000	80°	White	595 x 595 x 32
S9784U312TC/DP	240/50	$\frac{16}{27}$	$\frac{1650/1750/1700}{2700/2850/2750}$	3000/4000/5000	80°	White	1195 x 295 x 32
S9784U612TC/DP	240/50	$\frac{24}{40}$	$\frac{2850/3000/2900}{4500/4750/4600}$	3000/4000/5000	80°	White	1195 x 595 x 32

## PANEL MK II S9754 - 18W/48W

LED panel with a choice of single colour CCT or selectable colour temperature


### Application

Designed for commercial and office space lighting tasks


### Design Specifications

- Extruded aluminium profile with high efficiency opal diffuser, suitable for a range of installation types
- Quality white powder coat finish
- High efficiency SMD LED chips, CRI >80
- Remote constant current non-dimmable LED driver, complete with flex and plug
- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K for TC models
- Suspended wire kits available
- Emergency models compliant to AS/NZS2293 with D50 spacing classification available, see Interior Emergency section.

S9754/312TC

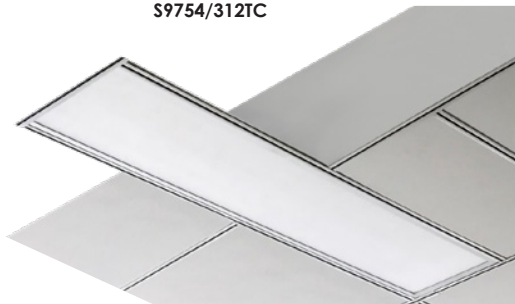

### Dimensions



### Performance

Dimmable Driver - Optional


Dimmer Type - Trailing edge  
(excluding S9754/612)  
1-10V, DALI / DSI




### Photometric Data

Unit: cd C0/C180 — C90/C270

S9754/312TC at 4000K





S9754/606TC at 5700K





For interior products the IP rating stated is from below the ceiling





S9754/306TC

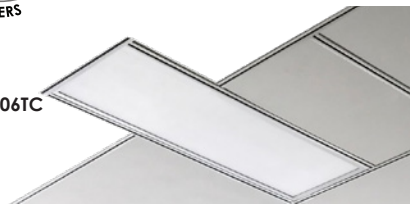

S9754/606TC

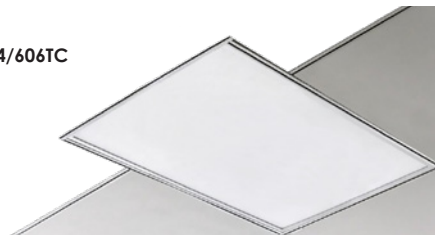

S9754/612TC

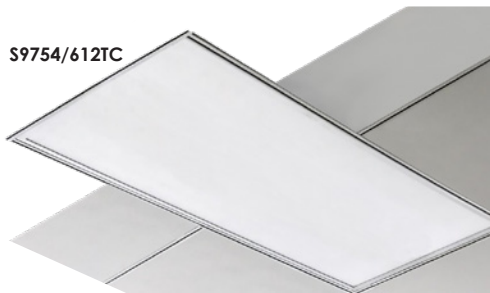

## Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
S9754/306TC	240/50	18	1900/2000/2100	3000/4000/5700	> 80	100°	White	595 x 295 x 12
S9754/606TC	240/50	30	3100/3200/3300	3000/4000/5700	> 80	100°	White	595 x 595 x 12
S9754/312TC	240/50	30	3000/3100/3200	3000/4000/5700	> 80	100°	White	1195 x 295 x 12
S9754/612TC	240/50	48	5000/5200/5300	3000/4000/5700	> 80	100°	White	1195 x 595 x 12
S9754/606 CW	240/50	30	3200	4000	> 80	100°	White	595 x 595 x 12
S9754/606 DL	240/50	30	3300	6000	> 80	100°	White	595 x 595 x 12
S9754/312 CW	240/50	30	3100	4000	> 80	100°	White	1195 x 295 x 12
S9754/312 DL	240/50	30	3200	6000	> 80	100°	White	1195 x 295 x 12
S9754/612 CW	240/50	48	5200	4000	> 80	100°	White	1195 x 595 x 12
S9754/612 DL	240/50	48	5200	6000	> 80	100°	White	1195 x 595 x 12



Anytime Fitness - NSW

## PANEL S9754HC - 40/50W


40 watt LED high CRI >95,  
low COI <1.8

### Application


Low COI <1.8 suitable for use in hospitals and medical centres to achieve compliance with AS/NZS 1680.2.5

### Design Specifications

- Cyanosis Observation Index (COI <1.8) compliant with AS/NZS 1680.2.5
- Extruded aluminium profile with high efficiency opal diffuser
- Quality white powder coat finish
- High efficiency SMD LED chips, CR >95 beam distribution 100°
- Remote constant current non-dimmable LED driver
- Suspended wire kits available

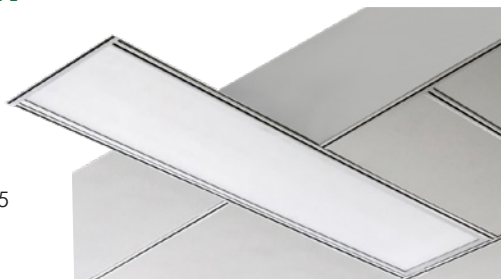

### Dimensions

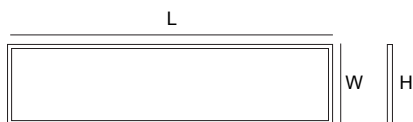

### Performance

Dimmable Driver - Optional

Dimmer Type - 1-10V (excluding S9754HC/612CW)  
DALI / DSI




### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9754HC/312CW at 4000K

S9754HC/606CW at 4000K

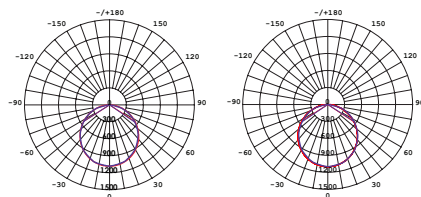

### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
S9754HC/312CW	240/50	40	2800	4000	> 95	100°	White	1195 x 295 x 12
S9754HC/606CW	240/50	40	3200	4000	> 95	100°	White	595 x 595 x 12
S9754HC/612CW	240/50	50	4000	4000	> 95	100°	White	1195 x 595 x 12

For terms and conditions of catalogue data use, refer to INDEX



## L-LINE S9724 - 18W / 27W / 36W


LED T8 louvre troffer with selectable TC lamps

### Application


Linear louvre profile designed for commercial interior spaces

### Design Specifications

- Pressed steel base
- Quality powder coated finish
- Double parabolic matt aluminium louvre
- High efficiency SMD LED chips  
UGR <19, CRI > 80
- LED selectable TC lamps included
- Safety fuse installed

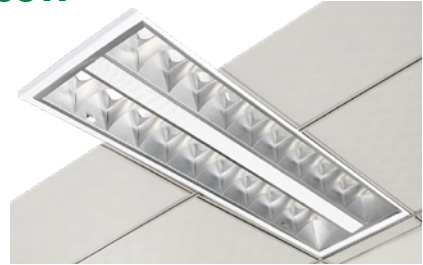

### Dimensions



### Performance

Dimmable Driver - No




### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9724/312TC at 4000K

S9724/606TC at 4000K

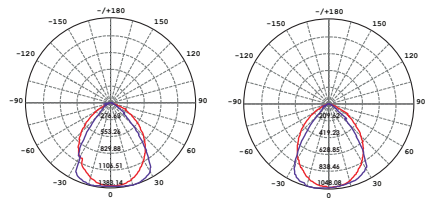

### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions (L x W x H mm)
S9724/306TC	240/50	2 x 9	900/1100/1000	3000/4000/6000	> 80	120°	595 x 295 x 85
S9724/312TC	240/50	2 x 18	1800/2200/2000	3000/4000/6000	> 80	120°	1195 x 295 x 85
S9724/606TC	240/50	3 x 9	2300/2500/2400	3000/4000/6000	> 80	120°	595 x 595 x 85

For interior products the IP rating stated is from below the ceiling

## L-LINE MKII S9734 - 38W

LED louvre troffer MKII

### Application

LED conventional commercial troffer design for interior spaces

### Design Specifications

- Pressed steel body profile
- Quality white powder coated finish
- Double parabolic matt aluminium louvre
- High efficiency SMD LED chips  
UGR <19, CRI > 80
- Opal polycarbonate LED diffuser, CCT 4000K
- 240V constant current non-dimmable LED driver


### Performance

Dimmable Driver - Optional

Dimmer Type - Trailing edge, 1-10V, DALI / DSI




### Dimensions



### Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9734/312L/CW at 4000K



### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
S9734/312L/CW	240/50	38	3500	4000	> 80	100°	White	1195 x 295 x 65

## BISMARCK S9754CR - 30W/40W

LED IP65 cleanroom panel

### Application


Designed for cleanroom commercial spaces

### Design Specifications

- Fully enclosed plaster troffer frame
- Adjustable flip-out mounting brackets
- Pressed steel frame, with a quality white powder coated finish
- IP65 from below the ceiling
- Precision sealed shockproof clear polycarbonate diffuser, 100° beam distribution
- CCT 4000K/6000K and TC 3000K/4000K/5700K selectable models available



### Dimensions



### Performance

Dimmable Driver - Optional

Dimmer Type - Trailing edge (excluding 40W models), 1-10V, DALI / DSI




### Photometric Data

Unit: cd C0/C180 — C90/C270

S9754/606CR/CW at 4000K

S9754/312CR/DL at 6000K

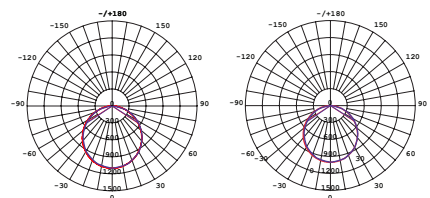

### Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
S9754/606CR/CW	240/50	30	3200	4000	> 80	100°	White	656 x 656 x 108
S9754/606CR/DL	240/50	30	3300	6000	> 80	100°	White	656 x 656 x 108
S9754HC/606CR/CW	240/50	40	3200	4000	> 95	100°	White	656 x 656 x 108
S9754/606CR/TC	240/50	30	3100/3300/3200	3000/4000/5700	> 80	100°	White	656 x 656 x 108
S9754/312CR/CW	240/50	30	3100	4000	> 80	100°	White	1236 x 336 x 108
S9754/312CR/DL	240/50	30	3200	6000	> 80	100°	White	1236 x 336 x 108
S9754HC/312CR/CW	240/50	40	2800	4000	> 95	100°	White	1236 x 336 x 108
S9754/312CR/TC	240/50	30	3100/3300/3200	3000/4000/5700	> 80	100°	White	1236 x 336 x 108

For interior products the IP rating stated is from below the ceiling



## S-FM SURFACE MOUNT FRAME

LED panel installation type S-FM surface mounted frame

### Application






Designed for commercial interior office spaces

### Design Specifications

- Pressed steel base
- Quality powder coated finish
- Accommodates ESS101 quick connect surface socket
- For S312FM and S606FM add the suffix / P2 to the order code, for kit form assemblies supplied ready for easy assembly on site



### Dimensions

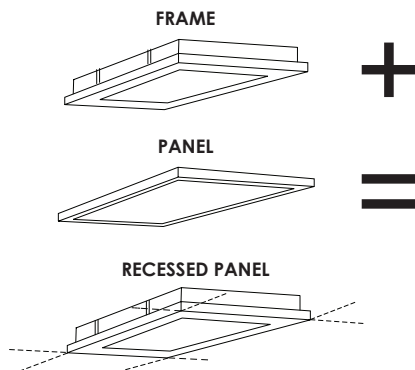

### Technical Specifications

Model No.	Suitable LED Fittings	Fitting Colour
S306FM	S9754/306, S9754/306EM	White
S312FM	S9754/312, S9754HC/312CW, S9754/312EM	White
S606FM	S9754/606, S9754HC/606CW, S9754/606EM	White
S612FM	S9754/612, S9754HC/612CW, S9754/612EM	White

For terms and conditions of catalogue data use, refer to INDEX

Linked in YouTube



## AIRSLLOT FRAME FOR LED PANEL


LED panel frame for  
T-bar ceiling

### Application

Conventional LED commercial  
airslot panels for general office spaces


### Design Specifications

- Pressed steel base
- Quality white powder coated finish


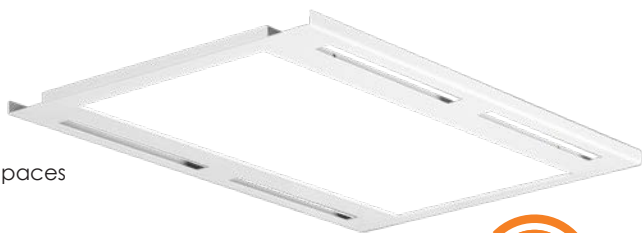


### Dimensions

#### S306FMA




#### S312FMA

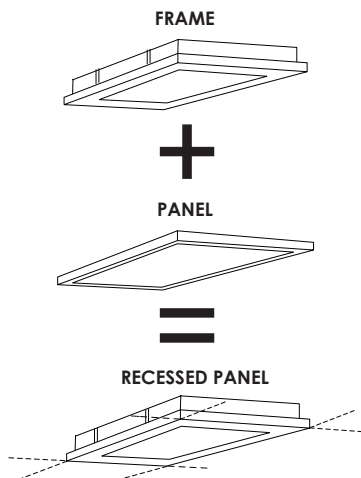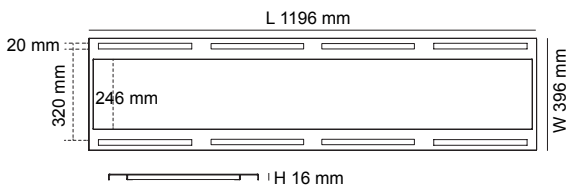

### Technical Specifications

Model No.	Suitable LED Fittings	Fitting Colour
S306FMA	S9754/306 range, S9784/306 range, S9724/306 range	White
S312FMA	S9754/312 range, S9784/312 range, S9724/312 range, S9734/312 range	White

For interior products the IP rating stated is from below the ceiling



**SAL LED PANELS,  
VISUAL COMFORT,  
ENERGY EFFICIENT  
AND MORE.**

## RECESSED CEILING FRAME (IMPERIAL) S9704


LED panel frame for  
recessed plaster ceiling

### Application

Designed for commercial interior  
office spaces

### Design Specifications


- Pressed steel base
- Quality white powder coated finish

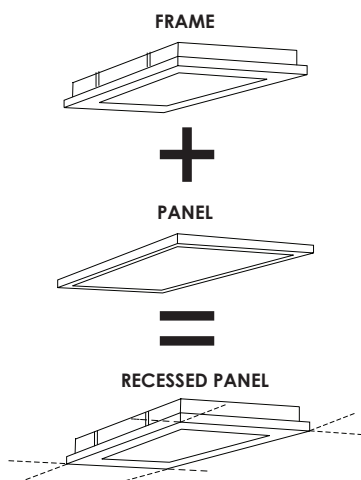

### Dimensions


**S9704/214/FRAME/I**

L x W: 605 x 350 mm



**S9704/228/FRAME/I**

L x W: 1250 x 350 mm



### Technical Specifications

Model No.	Suitable LED Fittings	Fitting Colour
S9704/214/FRAME/I	S9754/306 range, S9784/306 range	White
S9704/228/FRAME/I	S9754/312 range, S9784/312 range	White

For interior products the IP rating stated is from below the ceiling



## RECESSED CEILING FRAME (METRIC) S9704


LED panel frame for  
recessed plaster ceiling

### Application

Designed for commercial interior  
office spaces


### Design Specifications

- Pressed steel base
- Quality white powder coated finish

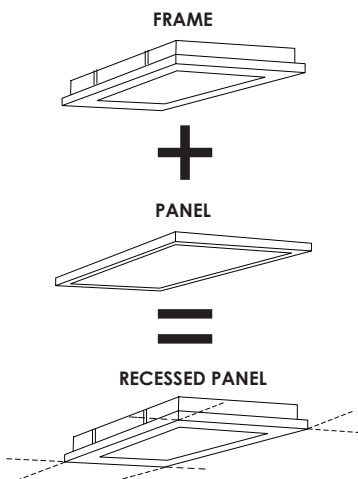


### Dimensions


#### S9704/214 FRAME




#### S9704/414 FRAME



#### S9704/228 FRAME



#### S9704/328 FRAME



### Technical Specifications

Model No.	Suitable LED Fittings	Fitting Colour
S9704/214FRAME	S9754/306 range, S9784/306 range	White
S9704/414 FRAME	S9754/606 range, S9784/606 range	White
S9704/228/FRAME	S9754/312 range, S9784/312 range	White
S9704/328 FRAME	S9754/612 range, S9784/612 range	White

**Terms and conditions of catalogue data use:**

1. Copyright SAL National Pty Ltd 2021
2. Compliances, installation and operations reflect product use in the region of Australia (and New Zealand for products listed on [www.sal.co.nz](http://www.sal.co.nz)).
3. All data and images contained within remain the property of SAL National Pty Ltd, or as acknowledged by the provider.
4. Trademarks shown remain the property of the relevant brand, company or third party. SAL, PIXIE PLUS and PIXIE are trademarks of SAL National.
5. Images, tones and finishes shown are for guidance only and may vary from the actual product, which if critical to the installation must be confirmed at order placement.
6. Due to continued product specification, standards and information updates, product data sourced from this document shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order.
7. For INTERIOR products, the designated IP rating is "from below the ceiling" unless otherwise specified.
8. SAL products are designed in accordance with all relevant and mandatory International and Australian Standards, which require installation by a qualified installer in accordance AS/NZS3000 and the manufacturers installation instructions, which require regular cleaning and maintenance of the equipment.
9. Product sales arising from this publication are sold in accordance with SAL standard terms and conditions of sale, available via [www.sal.net.au](http://www.sal.net.au) and [www.sal.co.nz](http://www.sal.co.nz) where relevant.
10. Due to continued product and regulative developments, validation of ANY sustainable rebate program product accreditation, must be confirmed prior to purchase via the relevant authority's web site.

