



SINCE 1998



2024/25

**SMARTER
LIGHTING
CHOICES**




A creative selection of exterior LED architectural wall, bollard and post top luminaires, ideal for residential and commercial spaces.



P374	AFFINITY SE7359TC	P375	AFFINITY SE7360TC	P376	ALTONA SE7356	P377	ALTONA PLUS SE7357	P378	ALTONA-S SE7358
P379	ANGLE SE7088	P380	BOLLARD SE7102/LGLS	P382	BOLLARD SE7103/4/5/6	P384	BOLLARD - DOME SL7088	P385	BOLLARD - FLAT SL7088
P386	BOLLARD SLA7102	P388	BONDI SE712XTC	P392	BONDI II SL732XTC	P394	BONDI LITE SE732XTC	P396	CARINA SE7150
P398	COOPER SE7081TC	P399	COOPER SE7082TC	P400	COOPER SE7083TC	P401	COOPER SE7084TC	P402	COOPER II SE7181TC
P403	COOPER II SE7182TC	P404	COOPER III SE7191TC	P405	COOPER III SE7192TC	P406	CUBE II S9320	P408	ETON SE7133TC



A creative selection of exterior LED architectural wall, bollard and post top luminaires, ideal for residential and commercial spaces.

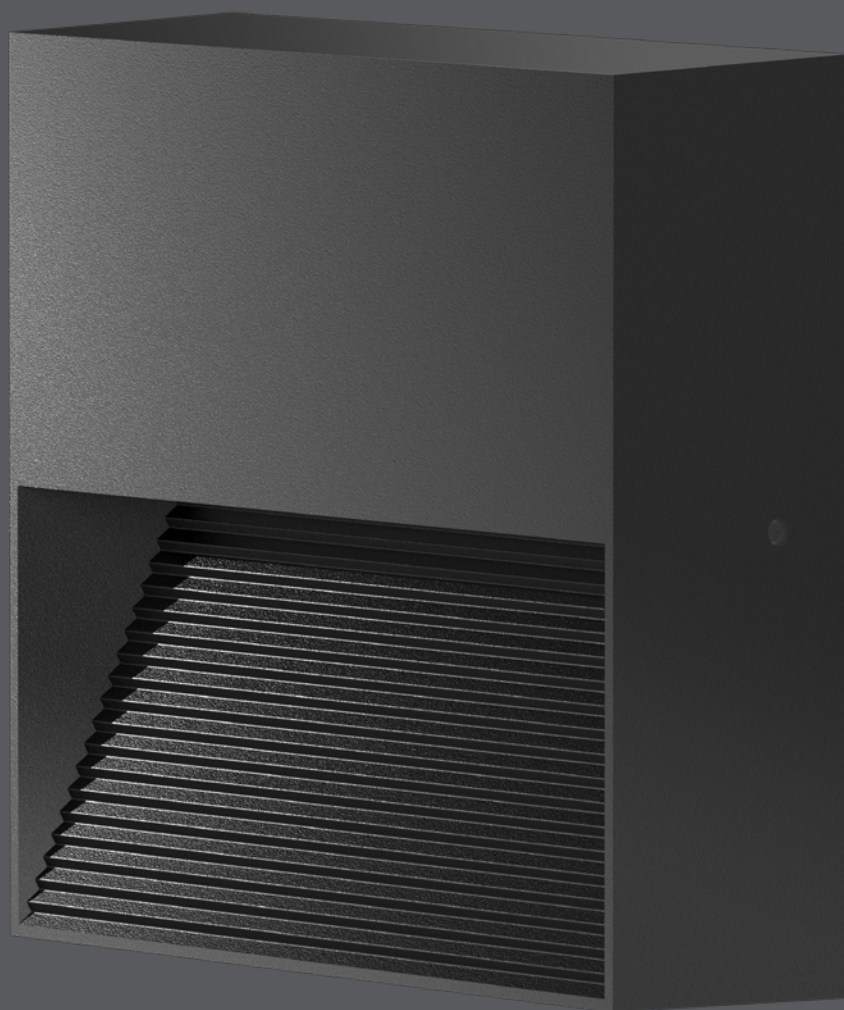

P409	ETON SE7134TC	P410	GEO S9342, S9343	P411	GEO S9344, S9345	P414	GLOW SL7362	P415	GROUND S9338
P416	HAMPTONS SE8002	P418	LOUNGE IV SE7066TC	P420	LOUNGE II S9328 TC	P422	LOUNGE III S9327	P424	MINI SPIKE SL7266
P426	MOD SE7013	P427	MURRAY I SE7017, SE7018	P428	NEW BONDI SL7221TC	P429	NEW BONDI SL7222TC	P430	NEW BONDI II SL7223TC
P431	NEW BONDI II SL7224TC	P432	NEW BRONTE SL702XTC	P433	NEWLAND SL7015L TC	P434	NEWPORT SPIKE SL7261TC	P435	QUARTER SE7146
P436	ROUND SE7063	P437	SQUARE SE7064	P438	STEIN SE7148	P439	STEIN MINI SE7147	P441	SWAN SE7085, SE7086



TC SELECTABLE COLOUR



AFFINITY SE7359TC - 8W

Dimmable, 8 watt LED circular profile, IP65 wall mount with selectable CCT

Application


Residential or commercial feature walkways and facades

Design Specifications

- Stylish, indirect optical design
- Durable aluminium circular profile, choice of white or black
- IP65 for interior or exterior use
- Integral flickerCONTROLLED LED control gear
- Selectable CCT, CRI>80
- IK06



Dimensions




Performance

- Dimmable - Trailing edge



Photometric Data SE7359TC at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7359TC/WH	240/50	8	530/600/590	3000/4000/5700	90°	White	Ø160 x 50
SE7359TC/BK	240/50	8	530/600/590	3000/4000/5700	90°	Black	Ø160 x 50



TC SELECTABLE COLOUR



AFFINITY SE7360TC - 15W

Dimmable, 15 watt LED circular profile, IP65 wall mount with selectable CCT

Application


Residential or commercial feature walkways and facades

Design Specifications

- Stylish, indirect optical design
- Durable aluminium circular profile, choice of white or black
- IP65 for interior or exterior use
- Integral flickerCONTROLLED LED control gear
- Selectable CCT, CRI>80
- IK06



Dimensions




Performance

- Dimmable - Trailing edge



Photometric Data SE7360TC at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7360TC/WH	240/50	15	1100/1200/1150	3000/4000/5700	90°	White	Ø250 x 50
SE7360TC/BK	240/50	15	1100/1200/1150	3000/4000/5700	90°	Black	Ø250 x 50

For terms of catalogue data use, refer to INDEX



ALTONA SE7356 - 5W

LED 5 watt surface mount, circular profile, wall luminaire.

Application


Residential stairs, walkways and interior commercial features



Design Specifications

- Durable aluminium body profile
- Matt black powder coat finish
- High efficiency LED optics
- CCT choice of 3000K or 5000K
- Beam distribution 60°
- Integral LED control gear
- IK08, IP65 performance

Dimensions

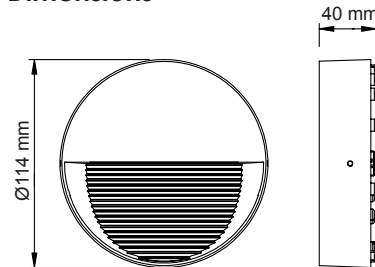


Performance

- Non-dimmable



Photometric Data SE7356WW at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7356WW/BK	240/50	5	150	3000	> 80	60°	Black	Ø114 x 40
SE7356NDL/BK	240/50	5	220	5000	> 80	60°	Black	Ø114 x 40

ALTONA PLUS SE7357 - 8W

LED 8 watt surface mount, circular profile, wall luminaire.

Application


Residential stairs, walkways and interior commercial features



Design Specifications

- Durable aluminium body profile
- Matt black powder coat finish
- High efficiency LED optics
- CCT choice of 3000K or 5000K
- Beam distribution 60°
- Integral LED control gear
- IK08, IP65 performance

Dimensions

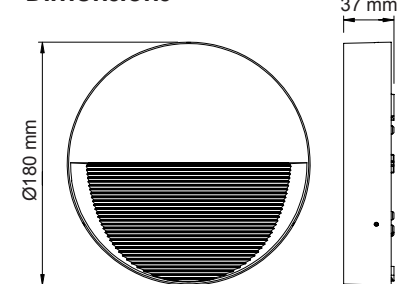


Performance

- Non-dimmable



Photometric Data SE7357WW at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7357WW/BK	240/50	8	350	3000	> 80	60°	Black	Ø180 x 37
SE7357NDL/BK	240/50	8	500	5000	> 80	60°	Black	Ø180 x 37

For terms of catalogue data use, refer to INDEX



ALTONA-S SE7358 - 5W

LED 5 watt surface mount, square profile, wall luminaire.

Application

Residential stairs, walkways and interior commercial features

Design Specifications


- Durable aluminium body profile
- Matt black powder coat finish
- High efficiency LED optics
- CCT choice of 3000K or 5000K
- Beam distribution 70°
- Integral control gear
- IK08, IP65 performance

Performance

- Non-dimmable




Dimensions

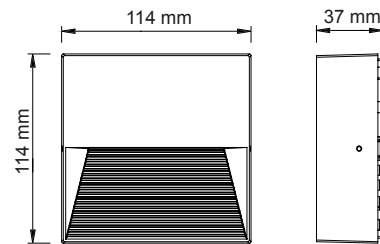

Photometric Data

SE7358 at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SE7358WW/BK	240/50	5	150	3000	> 80	70°	Black	114 x 114 x 37
SE7358NDL/BK	240/50	5	220	5000	> 80	70°	Black	114 x 114 x 37



ANGLE SE7088 - 18W

IP65 LED architectural adjustable surface mount luminaire

Application

A decorative residential exterior or interior solution

Design Specifications


- Die-cast aluminium body and powder coated body profile
- Clear tempered glass cover
- High efficiency LED optics
- High performance multifaceted reflector system
- Integral non-dimmable LED driver
- Adjustable head 0-90° rotation

Performance

- Non-dimmable



Dimensions



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SE7088 BK	240/50	18	1500	3000	> 80	40°	Black
SE7088 CB	240/50	18	1500	3000	> 80	40°	Charcoal Black

For terms of catalogue data use, refer to INDEX



BOLLARD SE7102/LGLS

LED bollard, E27 lamp base

Application

A stylish design, ideal for residential exterior garden and pathway spaces

Design Specifications

- Die-cast aluminium body, base plate mounting design, rag bolts excluded
- Durable powder coated black or silver finish
- Clear polycarbonate louvred diffuser
- Stainless steel reflector, lamp base E27, lamps to order
- Lamp options LG5, LG9, LGS4, LGS8, LGS10, LGS14, LT407, LT409, LT4012, LT4014,
- IK10, IP54 performance


Performance

- Dimmable - Refer lamp options



Dimensions

Ø 203 mm



H 1000 mm

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SE7102 BK/LGLS	Refer to the Lamp section of this catalogue					Black
SE7102 SL/LGLS						Silver



BOLLARD SE7103/4/5/6 - SE7106

Circular IP54 bollard, E27 lamp base

Application

Ideal for residential or apartment exterior pathways

Design Specifications


- Die-cast aluminium body, base plate mounting design, rag bolts included
- Durable BLACK powder coated finish
- Opal polycarbonate diffuser
- E27 lamp base, lamps to order
- Lamp options - LG5, LG9, LGS4, LGS8, LGS10, LGS14, LT407, LT409, LT4012, LT4014,
- IK10, IP54 performance

Performance

- Dimmable - Refer model No.



Dimensions



Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SE7103BK/LGLS	Refer to the Lamp section of this catalogue					Black
SE7104BK/LGLS						Black
SE7105BK/LGLS						Black
SE7106BK/LGLS						Black

Guide to outdoor lighting conductor termination


The following guide addresses a common water ingress fault, where moisture and air enters through the cable structure with IP65/IP66/IP67/IP68 lighting products.

So what is the problem?


Well it is all in the science. When a luminaire operates, the inside temperature increases and when it is turned off, the temperature naturally returns to its original static position. This process in turn creates thermal expansion and contraction, resulting in a difference between the inside and outside air pressure of the product. Thus creating a siphon effect, resulting in moisture and air infiltrating the luminaire housing, commonly through the cable structure when the internal air pressure is lower than the external environment.



Exposed open Air




Underground



Underwater


Common examples of incorrect terminations



single insulation exposed



using water-proof tape



terminations exposed

What is the solution? easy, use a water-proof connector, which maintains the products **designated IP rating** as follows.



Plug and play inline



Plug & play boxes



Multi port boxes

For safety, all electrical work should be conducted by an authorised electrical installer.



TC SELECTABLE COLOUR

BOLLARD - DOME SL7088DC TC - 10W

Dome profile, IP65 circular bollard, integral LED control gear with selectable CCT

Application

Ideal for residential or apartment exterior pathways

Design Specifications

- Die-cast aluminium body, dome profile design
- Base plate mounting, rag bolts included
- Durable BLACK powder coated finish
- Clear polycarbonate lens
- High efficiency LED optics
- Integral LED control gear
- IP65, IK08 performance
- SL7088DC50TC - 120mm Ø, 670mm height
- SL7088DC85TC - 120mm Ø, 1020mm height




Performance

- Non-dimmable



Photometric Data SL7088DC50TC/BK at 4000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SL7088DC50TC/BK	240/50	10	725/760/740	3000/4000/5000	250°	Black	Ø120 x H670
SL7088DC85TC/BK	240/50	10	725/760/740	3000/4000/5000	250°	Black	Ø120 x H1020



TC SELECTABLE COLOUR

BOLLARD - FLAT SL7088FC TC - 10W

Flat profile, IP65 circular bollard, integral LED control gear with selectable CCT

Application

Ideal for residential or apartment exterior pathways

Design Specifications

- Die-cast aluminium body, flat top profile design
- Base plate mounting, rag bolts included
- Durable BLACK powder coated finish
- Clear polycarbonate lens
- High efficiency LED optics
- Integral LED control gear
- IP65, IK08 performance
- SL7088FC50TC - 120mm Ø, 640mm height
- SL7088FC85TC - 120mm Ø, 990mm height




Performance

- Non-dimmable



Photometric Data SL7088FC50TC/BK at 4000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SL7088FC50TC/BK	240/50	10	725/760/740	3000/4000/5000	250°	Black	Ø120 x H640
SL7088FC85TC/BK	240/50	10	725/760/740	3000/4000/5000	250°	Black	Ø120 x H990

For terms of catalogue data use, refer to INDEX



BOLLARD SLA7102 - 18W

IP54, 18 watt LED bollard

Application

A stylish design, ideal for commercial or residential pathway spaces

Design Specifications

- Die-cast aluminium body, flat top profile design
- Base plate mounting, rag bolts excluded
- Durable powder coated black or silver finish
- Clear polycarbonate diffuser
- Matt aluminium reflector.
- High efficiency LED optics
- Integral non-dimmable LED driver
- IK10, IP54 performance

Performance

- Non-dimmable




SLA7102SL



SLA7102BK

Dimensions


Ø 203 mm



H 1000 mm

Photometric Data SLA7102BK at 6000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SLA7102BK	240/50	18	1200	6000	> 80	Black
SLA7102SL	240/50	18	1200	6000	> 80	Silver



BONDI

SE7121TC - 4W

SE7122TC - 2 X 4W

SE7123TC - 4W

IP65 LED architectural wall luminaires, selectable CCT with GU10 4 watt lamp/s included

Application


A decorative residential exterior or interior solution

Design Specifications

- Machined 316L stainless steel or cast aluminium body with a black powder coat or a stainless finish
- 240V termination
- Clear tempered glass cover
- Selectable CCT GU10 4 watt lamp/s included CCT 3000 / 4000 / 6000K
- Beam distribution 50°
- SL7121TC downward light distribution
- SL7122TC up/down light distribution
- SE7123TC adjustable arm



Dimensions

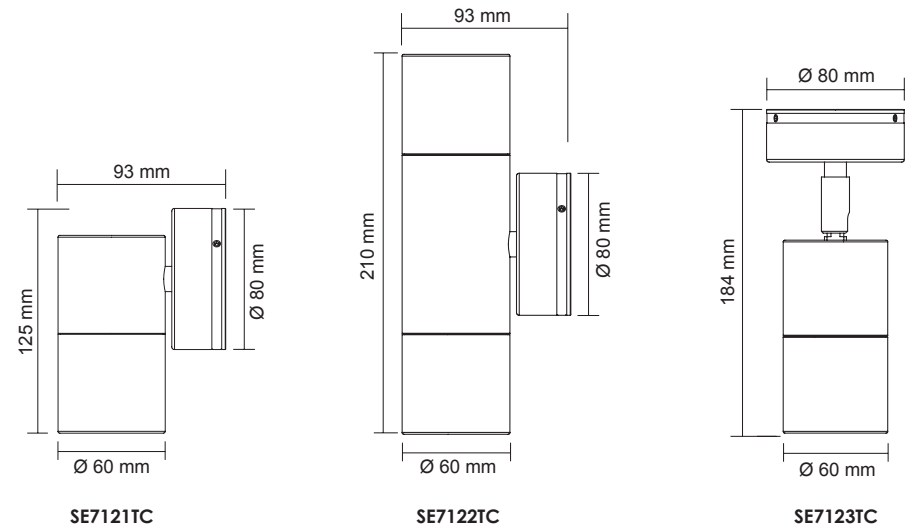

Technical Specifications

Model No.	Input (V)/(Hz)	Material	Fitting Colour
SE7121TC/SLS	240/50	Machined 316L stainless steel	Stainless Steel
SE7121TC/BK	240/50	Die cast aluminium	Black
SE7121TC/AST	240/50	Die cast aluminium/stainless finish	Aluminium - Stainless
SE7122TC/SLS	240/50	Machined 316L stainless steel	Stainless Steel
SE7122TC/BK	240/50	Die cast aluminium	Black
SE7122TC/AST	240/50	Die cast aluminium/stainless finish	Aluminium - Stainless
SE7123TC/SLS	240/50	Machined 316L stainless steel	Stainless Steel
SE7123TC/BK	240/50	Die cast aluminium	Black
SE7123TC/AST	240/50	Die cast aluminium/stainless finish	Aluminium - Stainless

For terms of catalogue data use, refer to INDEX



Image courtesy of



BONDI II

SL7321TC - 5W

SL7322TC - 2 X 5W

SL7323TC - 5W

IP65 LED architectural wall luminaires

Application


A decorative residential / commercial exterior or interior solution

Design Specifications

- Machined 316L stainless steel or cast aluminium body with a black powder coat or a stainless finish
- Clear tempered glass cover
- High efficiency LED optics
- Beam distribution 36°
- Integral non-dimmable LED driver
- SL7321TC downward light distribution
- SL7322TC up/down light distribution
- SE7323TC adjustable arm



Dimensions

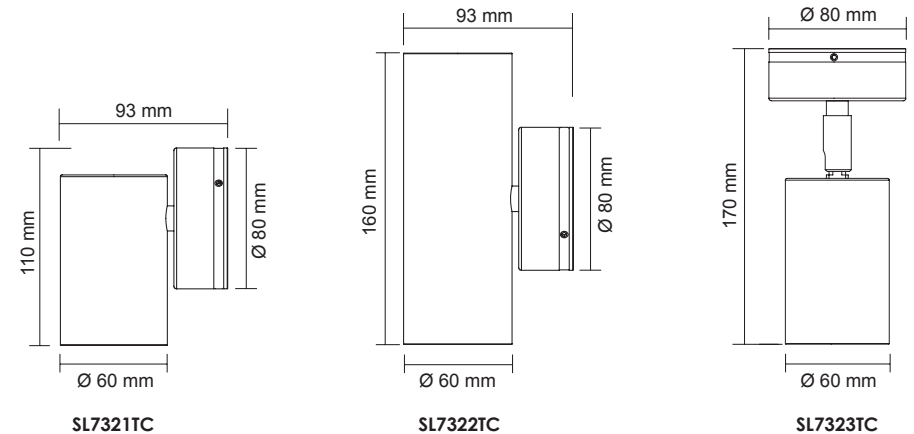

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SL7321TC/SLS	240/50	5	370/410/390	3000/4000/6000	> 80	Stainless Steel
SL7321TC/BK	240/50	5	370/410/390	3000/4000/6000	> 80	Black
SL7321TC/AST	240/50	5	370/410/390	3000/4000/6000	> 80	Aluminium - Stainless
SL7322TC/SLS	240/50	2 x 5	2 x 370/410/390	3000/4000/6000	> 80	Stainless Steel
SL7322TC/BK	240/50	2 x 5	2 x 370/410/390	3000/4000/6000	> 80	Black
SL7322TC/AST	240/50	2 x 5	2 x 370/410/390	3000/4000/6000	> 80	Aluminium - Stainless
SL7323TC/SLS	240/50	5	370/410/390	3000/4000/6000	> 80	Stainless Steel
SL7323TC/BK	240/50	5	370/410/390	3000/4000/6000	> 80	Black
SL7323TC/AST	240/50	5	370/410/390	3000/4000/6000	> 80	Aluminium - Stainless

For terms of catalogue data use, refer to INDEX

BONDI LITE

SE7321TC - 4W

SE7322TC - 2 X 4W

SE7323TC - 4W

IP65 LED architectural wall luminaires, with GU10 4 watt lamp/s included

Application

A decorative residential exterior coastal environments or interior spaces

Design Specifications


- Robust reinforced nylon body construction
- Stylish black finish
- Clear tempered glass cover
- Beam distribution 50°
- Selectable CCT GU10 4 watt lamp/s included CCT 3000 / 4000 / 6000K
- SL7321TC downward light distribution
- SL7322TC up/down light distribution
- SE7323TC adjustable arm
- IP65 performance

Performance

- Non-dimmable




Dimensions



Photometric Data SL7321TC at 3000K


Unit: cd C0/C180 — C90/C270




SE7321TC/BK



SE7322TC/BK

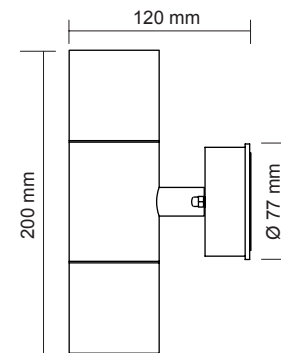

SE7323TC/BK

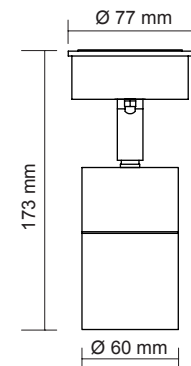

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Lamp Base
SE7321TC/BK	240/50	4	360/400/380	3000/4000/6000	> 80	Black	GU10
SE7322TC/BK	240/50	2 x 4	2 x 360/400/380	3000/4000/6000	> 80	Black	GU10
SE7323TC/BK	240/50	4	360/400/380	3000/4000/6000	> 80	Black	GU10

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

CARINA SE7150 - 10W

Low profile, 10 watt LED wall mount luminaire, with selectable CCT

Application

Residential and commercial interior and exterior wall features

Design Specifications


- Durable aluminium body profile
- Matt black or white powder coat finish
- High efficiency LED optics
- Selectable CCT 3000 / 4000 / 5700K
- Precise UP/DOWN beam distribution 8°
- Integral control gear
- IP65, IK08 performance

Performance

- Non-dimmable



Dimensions

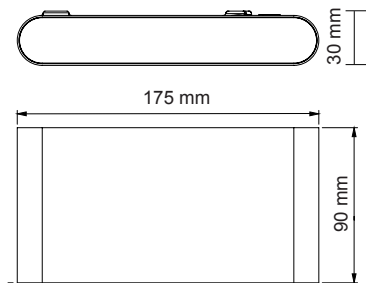


Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SE7150/10TC/WH	240/50	10	950/1050/1000	3000/4000/5700	> 80	White
SE7150/10TC/BK	240/50	10	950/1050/1000	3000/4000/5700	> 80	Black



Why is the IP rating of a luminaire so important?

IP (Ingress Protection) ratings are found in AS60529 and simply define the ability of an electrical product to seal and protect against the intrusion of foreign objects and water.

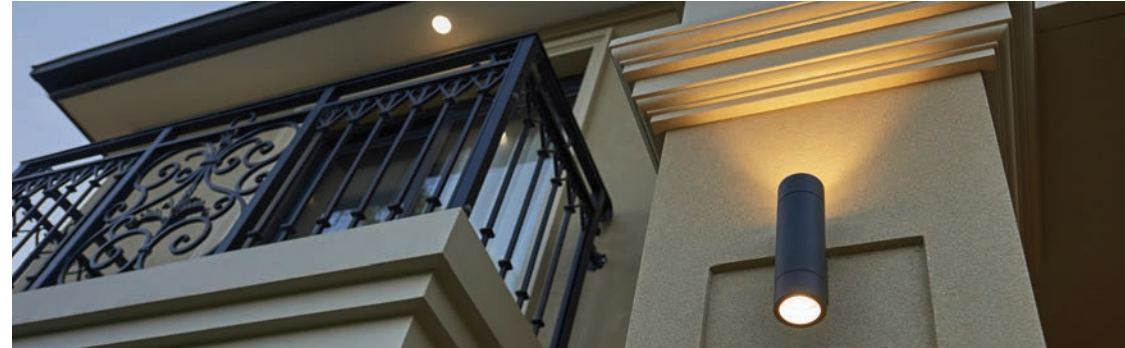

How does the rating system work?

Two numerals determine the rating, the first numeral stands for **(I)** intrusion of a foreign object, where the second numeral stands for **(P)** penetration of moisture. As a guide **IP20** rated products would be found in interior spaces with no requirement for protection against the elements, where an **IP65** product would be found in an exterior application, which requires substantial protection against the elements.

First Digit	Intrusion Protection	Second Digit	Moisture Protection
0	No specific protection	0	No specific protection
1	Protected against solid objects over 50mm, e.g. accidental contact of hands	1	Protected against vertically falling drops of water
2	Protected against solid objects over 12mm, e.g. contact with finger	2	Protected against direct sprays of water up to 15 degrees from the vertical
3	Protected against solid objects over 2.5mm, e.g. tools & wires	3	Protected against direct sprays of water up to 60 degrees from the vertical
4	Protected against solid objects over 1mm, e.g. wires & nails	4	Protected against water splashed from all directions, limited ingress permitted
5	Protected against dust limited ingress, no harmful deposits	5	Protected against low pressure jets of water from all directions
6	Totally protected against dust	6	Protected against strong jets of water
		7	Protection from temporary immersion
		8	(water tight), protection from continuous submersion
		9K	Protection against close range, high pressure and high temperature spray





COOPER SE7081TC - 16W

16 watt, IP65 LED commercial bunker luminaire, selectable CCT, IK10 rated, ceiling or wall mount

Application


A decorative architectural solution for commercial exteriors

Design Specifications

- Robust die-cast aluminium body, durable black or silver powder coat finish
- Stainless steel allen screws
- High efficiency LED optics
- Integral constant current non-dimmable LED driver
- Selectable CCT 3000 / 4000 / 5700K
- UV stabilized opal polycarbonate diffuser
- IK10, IP65 performance



Dimensions




Performance

- Sensor - optional microwave
- Dimming - optional trailing edge



Photometric Data SE7081TC at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7081TC/BK	240/50	16	1100/1150/1100	3000/4000/5700	100°	Black	Φ 265 x 85
SE7081TC/SL	240/50	16	1100/1150/1100	3000/4000/5700	100°	Silver	Φ 265 x 85



COOPER SE7082TC - 16W

16 watt, IP65 LED commercial bunker (cross frame) luminaire, selectable CCT, IK10 rated, ceiling or wall mount

Application


A decorative architectural solution for commercial exteriors

Design Specifications

- Robust die-cast aluminium body, durable black or silver powder coat finish
- Stainless steel allen screws
- High efficiency LED optics
- Integral constant current non-dimmable LED driver
- Selectable CCT 3000 / 4000 / 5700K
- UV stabilized opal polycarbonate diffuser
- IK10, IP65 performance



Dimensions




Performance

- Sensor - optional microwave
- Dimming - optional trailing edge



Photometric Data SE7082TC at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7082TC/BK	240/50	16	1100/1150/1100	3000/4000/5700	100°	Black	Φ 265 x 95
SE7082TC/SL	240/50	16	1100/1150/1100	3000/4000/5700	100°	Silver	Φ 265 x 95

For terms of catalogue data use, refer to INDEX





COOPER SE7083TC - 23W

23 watt, IP65 LED commercial bunker luminaire, selectable CCT, IK10 rated, ceiling or wall mount


Application

A decorative architectural solution for commercial exteriors

Design Specifications

- Robust die-cast aluminium body, durable black or silver finish
- Stainless steel allen screws
- High efficiency LED optics
- Integral non-dimmable LED driver
- Selectable CCT 3000 / 4000 / 5700K
- UV stabilized opal polycarbonate diffuser
- IK10, IP65 performance
- Emergency options available

Dimensions




Performance

- Sensor - optional microwave
- Dimming - optional trailing edge



Photometric Data SE7083TC at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7083TC/BK	240/50	23	1400/1500/1500	3000/4000/5700	100°	Black	Φ 350 x 130
SE7083TC/SL	240/50	23	1400/1500/1500	3000/4000/5700	100°	Silver	Φ 350 x 130



COOPER SE7084TC - 23W

23 watt, IP65 LED commercial bunker (cross frame) luminaire, selectable CCT, IK10 rated, ceiling or wall mount


Application

A decorative architectural solution for commercial exteriors

Design Specifications

- Robust die-cast aluminium body, durable black or silver finish
- Stainless steel allen screws
- High efficiency LED optics
- Integral non-dimmable LED driver
- Selectable CCT 3000 / 4000 / 5700K
- UV stabilized opal polycarbonate diffuser
- IK10, IP65 performance
- Emergency options available

Dimensions




Performance

- Sensor - optional microwave
- Dimming - optional trailing edge



Photometric Data SE7084TC at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7084TC/BK	240/50	23	1400/1500/1500	3000/4000/5700	100°	Black	Φ 350 x 145
SE7084TC/SL	240/50	23	1400/1500/1500	3000/4000/5700	100°	Silver	Φ 350 x 145

For terms of catalogue data use, refer to INDEX





COOPER II SE7181TC - 12W

Decorative 12 watt round profile IP65 architectural LED, ceiling or wall mount luminaire, with selectable CCT

Application


A decorative architectural solution for residential & commercial interior or exterior spaces

Design Specifications

- Selectable CCT 3000K / 4000K / 5700K
- Robust die-cast aluminium body profile, durable black powder coated finish
- Integral non-dimmable control gear, 12 watt
- High efficiency LED optics
- IK10, IP65 performance




Dimensions



Photometric Data SE7181TC/BK at 3000K

Unit: cd C0/C180 — C90/C270



Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SE7181TC/BK	240/50	12	1000/1200/1100	3000/4000/5700	> 80	Black	Ø 250 x 58



COOPER II SE7182TC - 12W

Decorative 12 watt round profile IP65 architectural LED eyelid wall mount luminaire, with selectable CCT

Application


A decorative architectural solution for residential & commercial interior or exterior spaces

Design Specifications

- Stylish eyelid design
- Selectable CCT 3000K / 4000K / 5700K
- Robust die-cast aluminium body profile, durable black powder coated finish
- Integral non-dimmable control gear, 12 watt
- High efficiency LED optics
- IK10, IP65 performance



Dimensions

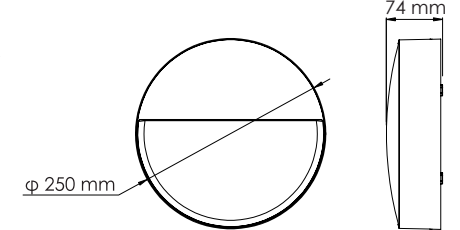


Performance

- Non-dimmable



Photometric Data SE7182TC/BK at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SE7182TC/BK	240/50	12	900/1100/1000	3000/4000/5700	> 80	Black	Ø 250 x 74

For terms of catalogue data use, refer to INDEX



COOPER III SE7191TC - 12W

Decorative 12 watt round profile IP65 architectural LED, ceiling or wall mount luminaire, with selectable CCT

Application

A decorative architectural solution for residential & commercial interior or exterior spaces

Design Specifications

- Selectable CCT 3000K / 4000K / 5700K
- Stylish black finish
- Integral non-dimmable LED control gear, 12 watt
- Robust PC body profile and diffuser
- High efficiency LED optics
- IK10, IP65 performance

Performance


- Non-dimmable



Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SE7191TC/BK	240/50	12	1050/1150/1100	3000/4000/5700	> 80	Black	Ø200 x H60

Dimensions

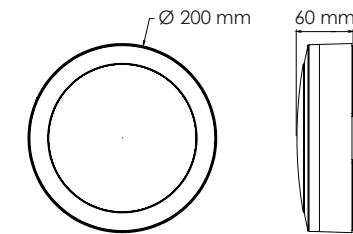

Photometric Data SE7191TC/BK at 3000K

Unit: cd C0/C180 — C90/C270



COOPER III SE7192TC - 18W

Decorative 18 watt round profile IP65 architectural LED, ceiling or wall mount luminaire, with selectable CCT

Application

A decorative architectural solution for residential & commercial interior or exterior spaces

Design Specifications

- Selectable CCT 3000K / 4000K / 5700K
- Integral non-dimmable control gear, 18 watt
- Robust PC body profile and diffuser
- High efficiency LED optics
- Stylish (wall mount) optional eyelid cover only to order, code SE7192TC/BK/P
- SE7192TC/BK/EM, compliant to AS/NZS 2293 Emergency Lighting & Exit Signs with a guaranteed minimum 90 minutes emergency mode function and LiFePO4 battery technology.
- IK10, IP65 performance

Performance


- Non-dimmable



Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SE7192TC/BK	240/50	18	1600/1800/1750	3000/4000/5700	> 80	Black	Ø275 x H60
SE7192TC/BK/EM	240/50	18	1600/1800/1750	3000/4000/5700	> 80	Black	Ø275 x H60

Dimensions



Photometric Data SE7192TC/BK at 3000K

Unit: cd C0/C180 — C90/C270



CUBE II S9320 - 10W

10 watt LED surface mount CUBE
profile wall luminaire, IP65

Application


Ideal for any residential or
commercial interior or exterior space



Design Specifications

- Durable aluminium body profile
- Powder coat finish, colour black or white
- High efficiency LED optics
- CCT choice of 3000K / 5000K
- Independent up & down beam,
adjustable from 10° to 60°
- Integral non-dimmable LED driver

Dimensions

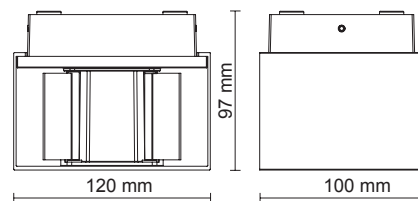


Performance

- Non-dimmable



Photometric Data S9320WW at 3000K

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
S9320WW/WH	240/50	10	750	3000	> 80	No	White
S9320WW/BK	240/50	10	750	3000	> 80	No	Black
S9320NDL/WH	240/50	10	900	5000	> 80	No	White
S9320NDL/BK	240/50	10	900	5000	> 80	No	Black

Adjustable 10 - 60°

Adjustable 10 - 60°



ETON SE7133TC - 4W

IP54, GU10 lamp base architectural wall luminaire, with selectable 4 watt CCT lamp included

Application


A decorative residential exterior or interior solution

Design Specifications


- Die-cast aluminium body and powder coat black or silver body profile
- Clear tempered glass cover
- Selectable CCT GU10 4 watt lamp included
- Downward light distribution only
- Beam distribution 50°

Performance

- Dimmable - Refer lamp selection

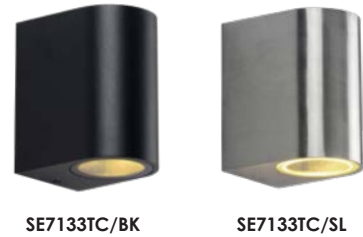

Dimensions



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SE7133TC/BK	240/50	4	360/400/380	3000/4000/6000	> 80	50°	Black
SE7133TC/SL	240/50	4	360/400/380	3000/4000/6000	> 80	50°	Silver



ETON SE7134TC - 2 X 4W

IP54, GU10 lamp base architectural wall luminaire, with selectable 2 x 4 watt CCT lamps included

Application

A decorative residential exterior or interior solution

Design Specifications


- Die-cast aluminium body and powder coat black or silver body profile
- Clear tempered glass cover
- Selectable CCT GU10 4 watt lamp included
- Up/down light distribution
- Beam distribution 50°

Performance

- Dimmable - Refer lamp selection



Dimensions

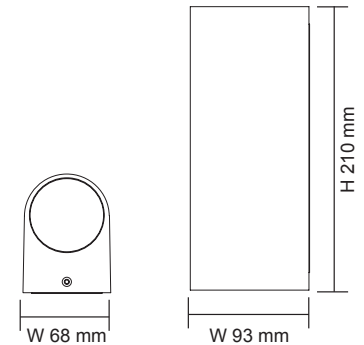

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SE7134TC/BK	240/50	2 x 4	2 x 360/400/380	3000/4000/6000	> 80	50°	Black
SE7134TC/SL	240/50	2 x 4	2 x 360/400/380	3000/4000/6000	> 80	50°	Silver

For terms of catalogue data use, refer to INDEX





GEO S9342 - 8W S9343 - 13W

LED inground IP67, luminaire, IK09 rated

Application


Decorative LED solution, ideal for gardens and decorative pathways

Design Specifications

- 316L stainless steel face cover and allen screws, die-cast aluminium body
- Clear tempered glass diffuser
- High output LED optics
- High performance multifaceted reflector
- Integral non-dimmable LED driver
- IP68 PG11 PVC cable gland, silicon gasket
- PVC installation canister included
- Pre-wired 3 core rubber flex, 450mm
- IP67, IK09 performance



Dimensions

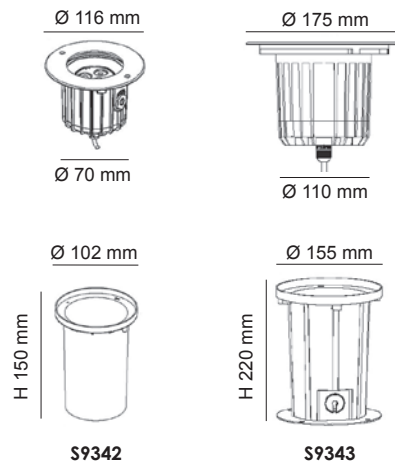

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Load Pressure Capacity (Kg)
S9342WW	240/50	8	400	3000	> 80	24°	Stainless Steel	3000
S9342CW	240/50	8	450	4000	> 80	24°	Stainless Steel	3000
S9343WW	240/50	13	600	3000	> 80	24°	Stainless Steel	4400
S9343CW	240/50	13	700	4000	> 80	24°	Stainless Steel	4400



GEO S9344 - 20W S9345 - 32W

LED inground IP67, luminaire, IK09 rated

Application


Decorative LED solution, ideal for gardens and decorative pathways

Design Specifications

- 316L stainless steel face cover and allen screws, die-cast aluminium body
- Clear tempered glass diffuser
- High output LED optics
- High performance multifaceted reflector
- Integral non-dimmable LED driver
- IP68 PG11 PVC cable gland, silicon gasket
- PVC installation canister included
- Pre-wired 3 core rubber flex, 450mm
- IP67, IK09 performance



Dimensions

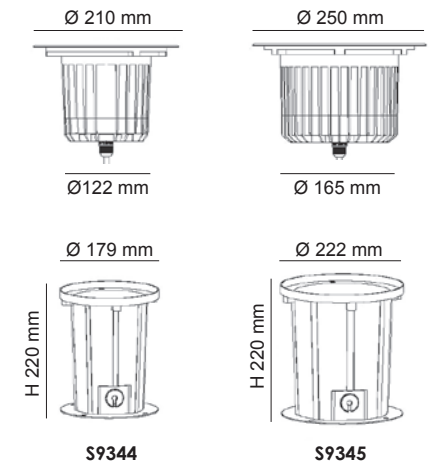

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Load Pressure Capacity (Kg)
S9344WW	240/50	20	1200	3000	> 80	24°	Stainless Steel	4900
S9344CW	240/50	20	1400	4000	> 80	24°	Stainless Steel	4900
S9345WW	240/50	32	2000	3000	> 80	24°	Stainless Steel	5000
S9345CW	240/50	32	2200	4000	> 80	24°	Stainless Steel	5000

For terms of catalogue data use, refer to INDEX





GLOW SL7362 - 4W

4 watt, IP67 LED inground luminaire, IK08 rated

Application

Decorative residential exterior solution, ideal for decks and pathways

Design Specifications


- Durable stainless steel body
- Clear tempered glass diffuser
- Frosted optical LED lens
- High output LED optics
- 12V DC constant voltage driver required
- Pre-wired 2 core rubber flex 1m with an IP67 nickel plated copper cable gland
- PVC installation cannister included
- Suitable LED drivers, PLUTO 15DV, PLUTO 40DV, PLUTO 60DV
- IK08, IP67 performance

Performance

- Non-dimmable



Dimensions

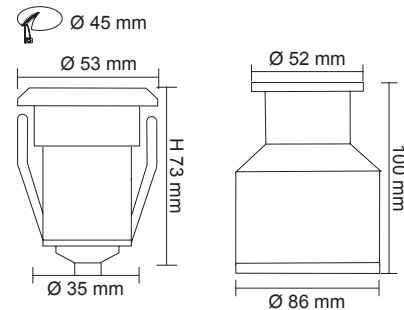

Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SL7362WW/SLS	12V DC	4	300	3000	> 80	15°	Stainless Steel
SL7362DL/SLS	12V DC	4	300	6000	> 80	15°	Stainless Steel

GROUND S9338 - 3W

3 watt adjustable LED inground luminaire, IP67 rated

Application

Decorative residential exterior solution, ideal for gardens and decorative pathways

Design Specifications


- Die-cast aluminium body
- Stainless steel face panel & screws, clear tempered glass diffuser
- High output LED optics
- 24V DC driver required
- Beam angle 30°, optical adjustment between 50°~60°
- PC installation cannister included, pre-wired 600 mm 2 core rubber flex
- Suitable LED drivers, PLUTO 15DV, PLUTO 40DV, PLUTO 60DV, PLUTO 100/24V
- IK08, IP67 performance

Performance


- Non-dimmable



Dimensions

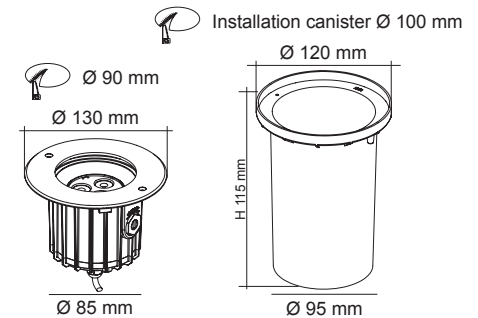

Optical adjustment

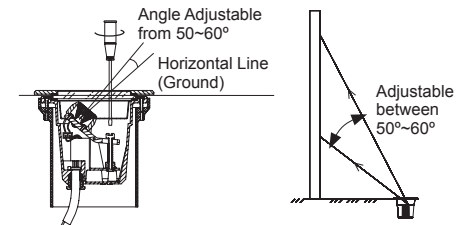

Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
S9338/3W/30 WW	24V DC	3	150	3000	> 70	30°	Stainless Steel
S9338/3W/30 DL	24V DC	3	200	6000	> 70	30°	Stainless Steel

For terms of catalogue data use, refer to INDEX

HAMPTONS SE8002 - 6 X 0.6W

IP65 LED residential deck light kits

Application

Decorative exterior feature lighting

Design Specifications

- Durable 316 stainless steel face aluminium body
- Frosted polycarbonate diffuser
- Ø35 mm x H26 mm round deck lights
- 6 x 0.6W deck light head with 3.5 m PVC flex & 2 pin quick connect plug
- Pre-wired 6m of rubber flex with 6 x 2 pin quick connect sockets
- 1 x IP65 10VA driver
- SE8002P extension kit contents include:
1 x Ø35 x H26 mm, 316 stainless steel face round deck light, 1 x 3.5 m PVC flex with 2 pin quick connect plug, 1 x 1.1 m extension cable
- IP65, IK08 performance




SE8002 LED deck light kit



SE8002P LED deck light extension kit

Dimensions

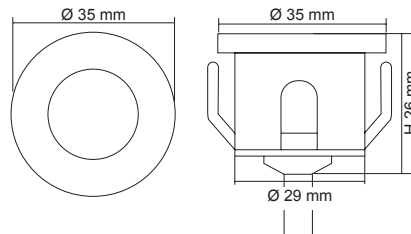

Technical Specifications

Model No.	Power (W)	CCT (K)	CRI	Dimmable	Model No.	Power (W)	CCT (K)	CRI	Dimmable
SE8002WW	6 x 0.6	3000	> 80	No	SE8002P/WW	1 x 0.6	3000	> 80	No
SE8002NDL	6 x 0.6	5000	> 80	No	SE8002P/NDL	1 x 0.6	5000	> 80	No

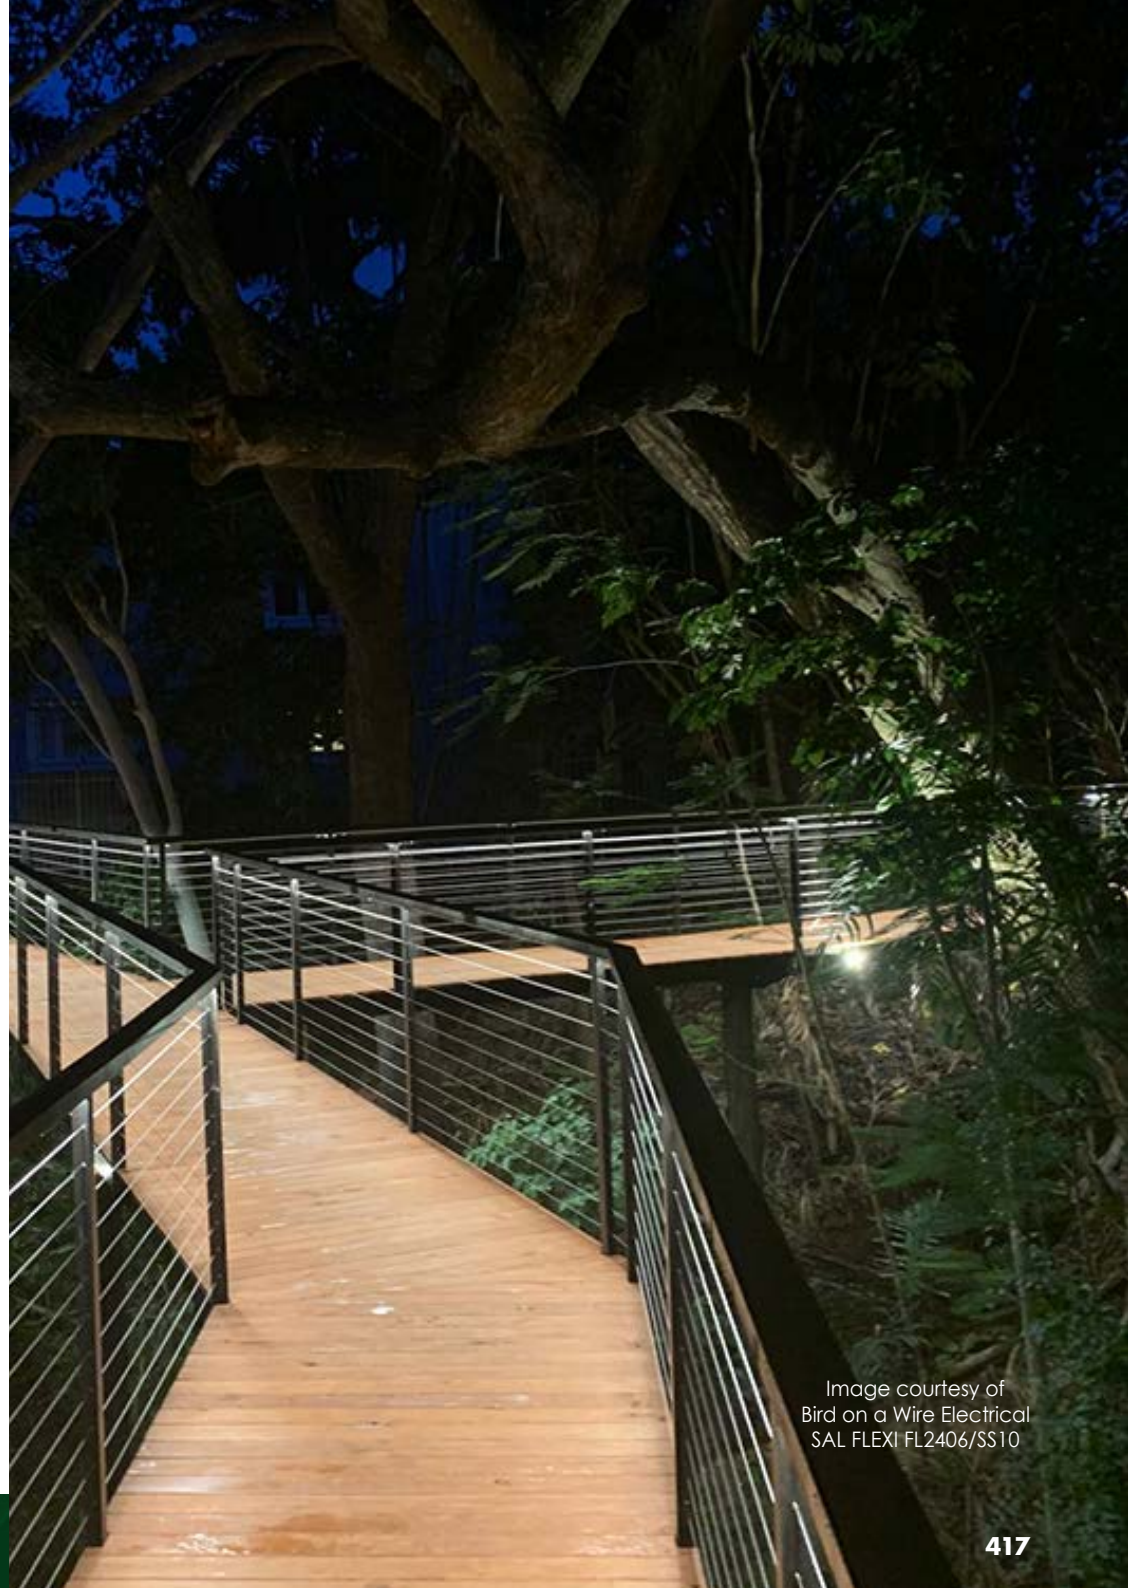


Image courtesy of
Bird on a Wire Electrical
SAL FLEXI FL2406/SS10



TC SELECTABLE COLOUR

LOUNGE IV SE7066TC - 9W


9 watt decorative IP54 architectural
LED wall mount luminaire

Application


A decorative architectural solution for residential
& commercial interior or exterior spaces

Design Specifications

- Convenient TC selectable colour temperature, 3000K/4000K/5000K
- Quality white or black powder coat finish
- High efficiency LED optics
- Indirect illumination optical performance
- Integral constant current non-dimmable driver

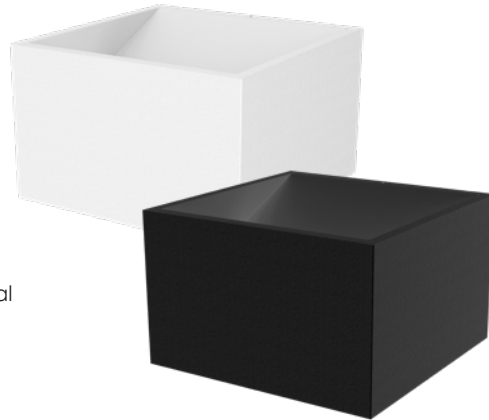

Dimensions



Performance


- Non-dimmable



Photometric Data

SE7066TC at 3000K

Unit: cd C0/C180 — C90/C270 —



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (L x W x H mm)
SE7066TC/WH	240/50	9	500/600/550	3000/4000/5000	> 80	White	130 x 130 x 80
SE7066TC/BK	240/50	9	500/600/550	3000/4000/5000	> 80	Black	130 x 130 x 80



Why is the IP rating important? In brief, IP (Ingress Protection) ratings are defined in EN 60529 and simply defines the ability of an electrical product to seal and protect against the intrusion of foreign objects and water.

(I) As the first numeral stands for intrusion of a foreign object, where (P) as the second numeral stands for the penetration of moisture.

As a guide IP20 rated products would be seen in interior spaces with no requirement for protection against the elements, where an IP65 product would be found in an exterior application which required substantial protection against the elements.



LOUNGE II

S9328/150TC - 9W

S9328/220TC - 15W

9/15 watt decorative IP54 architectural LED wall mount luminaire, with selectable CCT

Application

A architectural solution for residential & commercial interior or exterior spaces

Design Specifications

- Selectable CCT , 3000K / 4000K / 5000K
- Durable white or black powder coated finish
- Integral non-dimmable control gear
- Robust die-cast aluminium body profile
- High efficiency LED optics
- UP/DOWN optical performance

Performance

- Non-dimmable



Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (L x W x H mm)
S9328/150TC/WH	240/50	9	500/600/550	3000/4000/5000	> 80	White	150 x 90 x 55
S9328/150TC/BK	240/50	9	500/600/550	3000/4000/5000	> 80	Black	150 x 90 x 55
S9328/220TC/WH	240/50	15	800/1000/900	3000/4000/5000	> 80	White	220 x 90 x 55
S9328/220TC/BK	240/50	15	800/1000/900	3000/4000/5000	> 80	Black	220 x 90 x 55




Photometric Data

Unit: cd C0/C180 — C90/C270

S9328/150TC at 3000K



S9328/220TC at 3000K



LOUNGE III S9327/150 - 10W S9327/300 - 18W

10/18 watt decorative IP54 architectural
LED wall mount luminaire

Application

Ideal for any residential or commercial
interior or exterior space

Design Specifications

- Durable aluminium body profile
- White or black powder coat finish
- High efficiency LED optics
- CCT choice of 3000K or 5000K
- UP/DOWN optical performance
- Integral non-dimmable driver

S9327/150 BK




S9327/150 WH



S9327/300 BK



S9327/300 WH

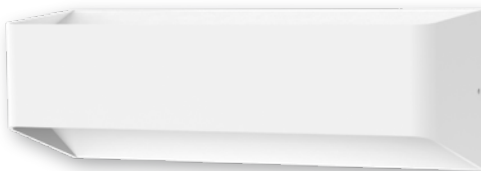


Performance

- Non-dimmable




Photometric Data S9327/300WW at 3000K


Unit: cd C0/C180 — C90/C270



Dimensions



S9327/150

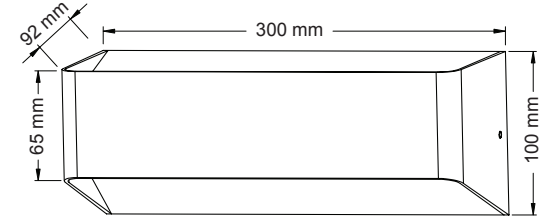

S9327/300

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (L x W x H mm)
S9327/150WW/WH	240/50	10	400	3000	> 80	White	150 x 100 x 92
S9327/150WW/BK	240/50	10	400	3000	> 80	Black	150 x 100 x 92
S9327/150NDL/WH	240/50	10	500	5000	> 80	White	150 x 100 x 92
S9327/150NDL/BK	240/50	10	500	5000	> 80	Black	150 x 100 x 92
S9327/300WW/WH	240/50	18	720	3000	> 80	White	300 x 100 x 92
S9327/300WW/BK	240/50	18	720	3000	> 80	Black	300 x 100 x 92
S9327/300NDL/WH	240/50	18	900	5000	> 80	White	300 x 100 x 92
S9327/300NDL/BK	240/50	18	900	5000	> 80	Black	300 x 100 x 92

For terms of catalogue data use, refer to INDEX

MINI SPIKE SL7266 - 6W

IP65 LED residential mini spike
landscape luminaire

Application

Decorative accent solution for
residential garden spaces

Design Specifications


- Die-cast powder coated black aluminium body profile
- 12V AC or DC driver required
- High efficiency LED optics
- Pre-wired with 1.5 m 2 core rubber flex
- IP65 protection
- Adjustable trunnion optical system

Performance

- Non-dimmable



Dimensions



Technical Specifications


Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SL7266WW/BK	12V AC/DC	6	400	3000	> 80	30°	Black

Guide to outdoor lighting conductor termination


The following guide addresses a common water ingress fault, where moisture and air enters through the cable structure with IP65/IP66/IP67/IP68 lighting products.

So what is the problem?


Well it is all in the science. When a luminaire operates, the inside temperature increases and when it is turned off, the temperature naturally returns to its original static position. This process in turn creates thermal expansion and contraction, resulting in a difference between the inside and outside air pressure of the product. Thus creating a siphon effect, resulting in moisture and air infiltrating the luminaire housing, commonly through the cable structure when the internal air pressure is lower than the external environment.



Exposed open Air




Underground



Underwater


Common examples of incorrect terminations



single insulation exposed




using water-proof tape



terminations exposed

What is the solution? easy, use a water-proof connector, which maintains the products **designated IP rating** as follows.



Plug and play inline



Plug & play boxes



Multi port boxes

For safety, all electrical work should be conducted by an authorised electrical installer.

MOD SE7013

Decorative IP44 architectural LED wall mount luminaire - E27 lamp base

Application

A decorative architectural solution for residential exteriors

Design Specifications

- Stainless steel face panel
- Powder coated finish (SE7013 BK)
- Opal acrylic diffuser
- E27 lamp base
- Lamp NOT included
- Lamp options - LG5, LG9, LGS4, LGS8, LGS10, LGS14D, LT407, LT409

Performance

- Dimmable - Refer lamp selection



Technical Specifications


Model No.	Input (V)/(Hz)	Fitting Colour	Lamp Base	Dimension (D x H x W mm)
SE7013 BK	240/50	Black	E27	92 x 280 x 214mm
SE7013 SLS	240/50	Stainless Steel	E27	92 x 280 x 214mm



SE7013 BK

SE7013 SLS

Dimensions

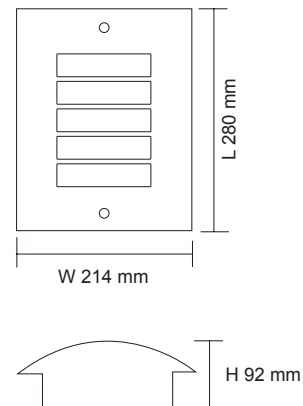

MURRAY I SE7017, SE7018

LED wall and post mount luminaires

Application

Decorative exterior pathway bollards

Design Specifications

- 304 stainless steel body
- Powder coated finish (black)
- Opal acrylic diffuser
- E27 lamp base, lamp not included
- Lamp options - LG5, LG9, LGS4, LGS8, LGS10, LT407, LT409
- IK08, IP44 performance


Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V)/(Hz)	Fitting Colour
SE7017 BK	240/50	Black
SE7017 SLS	240/50	Stainless Steel
SE7018 BK	240/50	Black
SE7018 SLS	240/50	Stainless Steel

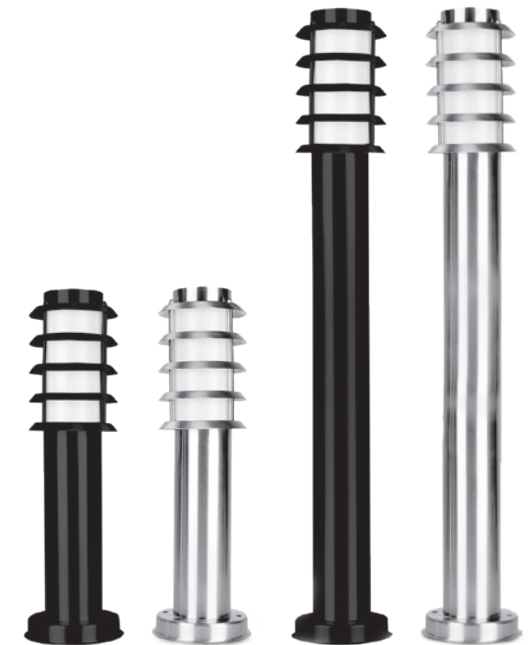


SE7017 BK

SE7017 SLS

SE7018 BK

SE7018 SLS

Dimensions



SE7017

SE7018



NEW BONDI SL7221TC - 4W

IP65 GU10 architectural wall luminaires, with 4 watt GU10 selectable CCT lamp included

Application

A decorative residential exterior or interior solution

Design Specifications


- Aluminium body profile, powder coat black or stainless (AST) finish
- Clear tempered glass cover
- GU10 lamp base, selectable TC lamp included
- Lamp options GU10L550TC, GU10LR750, GU10LA750
- Downward light distribution
- Beam distribution 50°

Performance

- Dimmable - Refer lamp selection



Dimensions



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SL7221TC/BK	240/50	4	360/400/380	3000/4000/6000K	> 80	Black
SL7221TC/AST	240/50	4	360/400/380	3000/4000/6000K	> 80	Aluminium - Stainless



NEW BONDI SL7222TC - 2 X 4W

IP65 GU10 architectural wall luminaires, with 2 x 4 watt GU10 selectable CCT lamps included

Application

A decorative residential exterior or interior solution

Design Specifications


- Aluminium body profile, powder coat black or (AST) stainless finish
- Clear tempered glass cover
- GU10 lamp base, selectable TC lamp included
- Lamp options GU10L550TC, GU10LR750, GU10LA750
- Up and down light distribution
- Beam distribution 50°

Performance

- Dimmable - Refer lamp selection



Dimensions

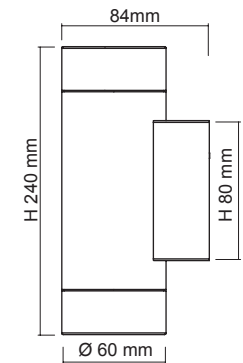

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SL7222TC/BK	240/50	2 x 4	2 x 360/400/380	3000/4000/6000K	> 80	Black
SL7222TC/AST	240/50	2 x 4	2 x 360/400/380	3000/4000/6000K	> 80	Aluminium - Stainless

For terms of catalogue data use, refer to INDEX





NEW BONDI II SL7223TC - 5W

IP65 LED architectural wall luminaires

Application


A decorative residential / commercial exterior or interior solution

Design Specifications

- Aluminium body profile, powder coat black or (AST) stainless finish
- Clear tempered glass cover
- Polycarbonate optical lens
- High efficiency LED optics
- Integral non-dimmable LED driver
- Downward light distribution only
- Beam distribution 36°



Dimensions




Performance

- Non-dimmable



Photometric Data SL7223TC at 4000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SL7223TC/BK	240/50	5	370/410/390	3000/4000/6000K	> 80	Black
SL7223TC/AST	240/50	5	370/410/390	3000/4000/6000K	> 80	Aluminium - Stainless



NEW BONDI II SL7224TC - 2 X 5W

IP65 LED architectural wall luminaires

Application


A decorative residential / commercial exterior or interior solution



Design Specifications

- Aluminium body profile, powder coat black or (AST) stainless finish
- Clear tempered glass cover
- Polycarbonate optical lens
- High efficiency LED optics
- Integral non-dimmable LED driver
- Up and down light distribution
- Beam distribution 36°

Dimensions




Performance

- Non-dimmable



Photometric Data SL7224TC at 4000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SL7224TC/BK	240/50	2 x 5	2 x 370/410/390	3000/4000/6000K	> 80	Black
SL7224TC/AST	240/50	2 x 5	2 x 370/410/390	3000/4000/6000K	> 80	Aluminium - Stainless

For terms of catalogue data use, refer to INDEX





TC SELECTABLE COLOUR

NEW BRONTE SL7021TC - 3W SL7022TC - 2 X 3W

IP65 LED architectural wall luminaire
with selectable CCT

Application

A decorative residential / commercial
exterior or interior solution

Design Specifications

- Aluminium body profile, powder coat
black or stainless (AST) finish or
316 Stainless Steel
- Clear tempered glass cover
- Polycarbonate optical lens
- High efficiency LED optics, beam
distribution 36°
- Integral non-dimmable LED driver
- SL7021 downward light distribution
- SL7022 up and down light distribution
- IP65, IK08 performance



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Fitting Colour	Dimension (L x W x H mm)
SL7021TC/SLS	240/50	3	210/230/220	3000/4000/6000	Stainless Steel	64 x 40 x 120
SL7021TC/BK	240/50	3	210/230/220	3000/4000/6000	Black	64 x 40 x 120
SL7021TC/AST	240/50	3	210/230/220	3000/4000/6000	AL-Stainless	64 x 40 x 120
SL7022TC/SLS	240/50	2 x 3	2 x 210/230/220	3000/4000/6000	Stainless Steel	64 x 40 x 160
SL7022TC/BK	240/50	2 x 3	2 x 210/230/220	3000/4000/6000	Black	64 x 40 x 160
SL7022TC/AST	240/50	2 x 3	2 x 210/230/220	3000/4000/6000	AL-Stainless	64 x 40 x 160



TC SELECTABLE COLOUR

NEWLAND SL7015L TC - 10W

LED architectural post luminaire, with
selectable CCT

Application

Ideal for residential or apartment
exterior pathways

Design Specifications

- Die-cast aluminium body, flat profile design
- Durable BLACK powder coated finish
- Clear polycarbonate lens, pathway
optical distribution 70°
- Integral LED control gear 10 watt
- Base plate mounting design,
rag bolts included
- IP65, IK08 performance
- SL7015L65TC/BK - 120mm Ø, 650mm height
- SL7015L100TC/BK - 120mm Ø, 1000mm height

Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimension (D x H mm)
SL7015L65TC/BK	240/50	10	300/340/375	2800/4000/5000	> 80	Black	Ø 120 x 650
SL7015L100TC/BK	240/50	10	300/340/375	2800/4000/5000	> 80	Black	Ø 120 x 1000



SL7015L65TC/BK

SL7015L100TC/BK



NEWPORT SPIKE SL7261TC - 5W

IP54 MR16 LED residential spike luminaire, with selectable CCT lamp

Application

Decorative accent solution


Design Specifications

- Machined 316L stainless steel or extruded aluminium body profile, black or silver or anodized silver finish
- Clear tempered glass cover
- GU5.3 lamp base, MR16 5W selectable CCT lamp included
- 600 mm 2 core rubber flex
- 12V AC or DC driver required
- Lamp options - MR16/7W, MR16DIM9 (excluding Stainless Steel fittings)



SL7261TC/SL SL7261TC/BK SL7261TC/AS SL7261TC/SL

Dimensions

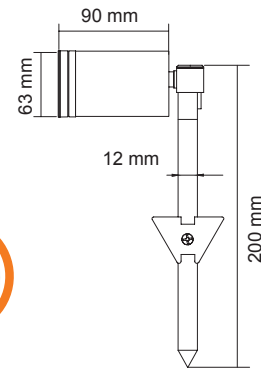

Performance

- Dimmable - Refer lamp selection



Technical Specifications

Model No.	Input (V)	Lamp Base	Material	Fitting Colour	Type
SL7261TC/SL	12V AC/DC	GU5.3	Machined 316L Stainless Steel	Stainless Steel	Single Head
SL7261TC/SL	12V AC/DC	GU5.3	Extruded Aluminium	Silver	Single Head
SL7261TC/BK	12V AC/DC	GU5.3	Extruded Aluminium	Black	Single Head
SL7261TC/AS	12V AC/DC	GU5.3	Extruded Aluminium	Anodized Silver	Single Head

QUARTER SE7146 - 16W

IP65 LED architectural wall luminaire IK07

Application


A decorative residential / commercial exterior or interior solution

Design Specifications

- Die-cast aluminium body and powder coated body profile
- Clear tempered glass cover
- High efficiency LED optics
- High performance multifaceted reflector system
- Integral non-dimmable LED driver
- Installation orientation, face down only



Dimensions

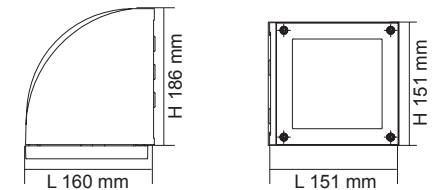

Performance


- Non-dimmable



Photometric Data

SE7146WW at 3000K

Unit: cd C0/C180 — C90/C270 —

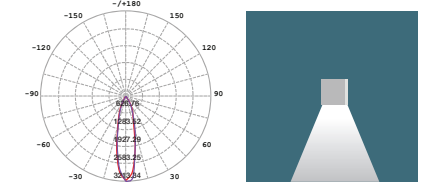

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SE7146WW/BK	240/50	16	1150	3000	> 80	25°	Black
SE7146WW/CB	240/50	16	1150	3000	> 80	25°	Charcoal Black
SE7146CW/BK	240/50	16	1200	4000	> 80	25°	Black
SE7146CW/CB	240/50	16	1200	4000	> 80	25°	Charcoal Black

For terms of catalogue data use, refer to INDEX



ROUND SE7063 - 8W

Decorative round profile IP65 architectural LED wall mount luminaire

Application

A decorative architectural solution for residential & commercial interior or exterior spaces

Design Specifications


- Colour temperature 3000K
- Durable black or stylish silver powder coated finish
- Integral non-dimmable control gear, 8 watt
- Robust die-cast aluminium body profile
- High efficiency LED, CRI >80
- IP65, IK08 performance

Performance

- Non-dimmable




Dimensions



Photometric Data

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270

SE7063WW at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SE7063WW/BK	240/50	8	600	3000	> 80	Black
SE7063WW/SL	240/50	8	600	3000	> 80	Silver



SQUARE SE7064 - 8W

Decorative square profile IP65 architectural LED wall mount luminaire

Application

A decorative architectural solution for residential & commercial interior or exterior spaces

Design Specifications


- Colour temperature 3000K
- Durable black or stylish silver powder coated finish
- Integral non-dimmable control gear, 8 watt
- Robust die-cast aluminium body profile
- High efficiency LED, CRI >80
- IP65, IK08 performance

Performance

- Non-dimmable




Dimensions



Photometric Data

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270

SE7064WW at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour
SE7064WW/BK	240/50	8	600	3000	> 80	Black
SE7064WW/SL	240/50	8	600	3000	> 80	Silver

For terms of catalogue data use, refer to INDEX



STEIN SE7148 - 32W

IP65 LED architectural wall luminaire, up and down

Application

A decorative residential / commercial exterior or interior solution

Design Specifications

- Die-cast aluminium body and powder coated body profile
- Clear tempered glass cover
- High efficiency LED optics
- High performance multifaceted reflector system, standard beam distribution 25°, narrow beam distribution < 25° available
- Integral non-dimmable LED driver

Performance

- Non-dimmable



Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SE7148WW/BK	240/50	32	2 x 800	3000	> 80	25°	Black
SE7148WW/CB	240/50	32	2 x 800	3000	> 80	25°	Charcoal Black
SE7148CW/BK	240/50	32	2 x 800	4000	> 80	25°	Black
SE7148CW/CB	240/50	32	2 x 800	4000	> 80	25°	Charcoal Black
SE7148NB/WW/BK	240/50	32	800/500	3000	> 80	25°	Black
SE7148NB/WW/CB	240/50	32	800/500	3000	> 80	25°	Charcoal Black
SE7148NB/CW/BK	240/50	32	800/500	4000	> 80	25°	Black
SE7148NB/CW/CB	240/50	32	800/500	4000	> 80	25°	Charcoal Black



SE7148 CB

SE7148 BK


Dimensions



Photometric Data

SE7148WW at 3000K

Unit: cd C0/C180 — C90/C270

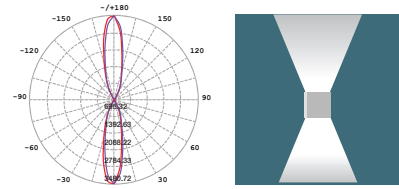

STEIN MINI SE7147 - 16W

IP65 LED architectural wall luminaire, up and down

Application

A decorative residential / commercial exterior or interior solution

Design Specifications

- Die-cast aluminium body and powder coated body profile
- Clear tempered glass cover
- High efficiency LED optics
- High performance multifaceted reflector system, beam distribution 25°
- Integral constant current non-dimmable LED driver
- IK08, IP65 performance

Performance

- Non-dimmable



Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SE7147WW/BK	240/50	16	2 x 400	3000	> 80	25°	Black
SE7147WW/CB	240/50	16	2 x 400	3000	> 80	25°	Charcoal Black
SE7147CW/BK	240/50	16	2 x 400	4000	> 80	25°	Black
SE7147CW/CB	240/50	16	2 x 400	4000	> 80	25°	Charcoal Black
SE7147NDL/BK	240/50	16	2 x 400	4000	> 80	25°	Black
SE7147NDL/CB	240/50	16	2 x 400	4000	> 80	25°	Charcoal Black



SE7147 CB

SE7147 BK


Dimensions

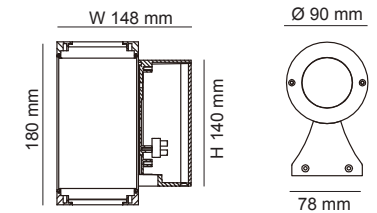

Photometric Data

SE7147WW at 3000K

Unit: cd C0/C180 — C90/C270

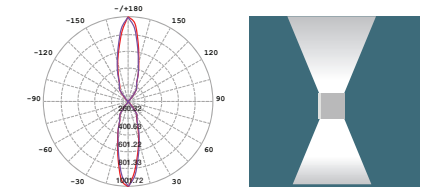

For terms of catalogue data use, refer to INDEX

NEED A HAND PACKING YOUR PRODUCT DATA SHEETS?



GIVE THE SAL SHOPPING CART A GO.



SWAN SE7085, SE7086

LED stainless steel wall or ground
mount luminaire

Application

Decorative exterior stainless steel,
ideal for foyers and residential perimeters

Design Specifications

- Stainless steel body
- Clear acrylic diffuser
- 240V, E27 lamp base, lamp not included
- Lamp options LG5, LG9, LGS4, LGS8, LGS10, LT407, LT409

Performance

- Non-dimmable



Technical Specifications


Model No.	Input (V)/(Hz)	Fitting Colour
SE7085	240/50	Stainless Steel
SE7086/55	240/50	Stainless Steel
SE7086/100	240/50	Stainless Steel

For terms of catalogue data use, refer to INDEX


SE7085




Dimensions



SE7086/55



SE7086/100





 SAL National Pty Ltd - 40 Biloela St, Villawood NSW 2163

 + 61 2 9723 3099

 www.sal.net.au

 info@sal.net.au

 VICT/TAS - 46/48 Keys Road Moorabbin VIC 3189

 + 61 3 9532 3168

 info@sal.net.au

 QLD - 36 Whitelaw Place Richlands QLD 4077

 + 61 7 3879 5999

 info@sal.net.au

 SA/NT - Unit 1, 9 Alfred Avenue Beverley SA 5009

 +61 8 7084 1958

 info@sal.net.au

 WA - 29 Beringarra Avenue Malaga WA 6090

 +61 8 9248 7458

 info@sal.net.au



2024/25

