

SMARTER LIGHTING CHOICES



SAL Lighting a Smarter Future  



2026/28





A diverse selection of LED interior architectural pendants and wall mount luminaires, ideal for residential and commercial spaces.



AMBIENCE S9312 – 1W

Stylish interior wall mount LED luminaire

Application

Residential hallways, bedrooms, stairways

Design Specifications


- Square aluminum face profile, powder coat white finish
- Integral 240V control gear
- CCT 3000K, 40lm
- IP54 front only
- Cut out: 77 x 77mm
- Double insulated

Performance

- Dimmable - No




Dimensions

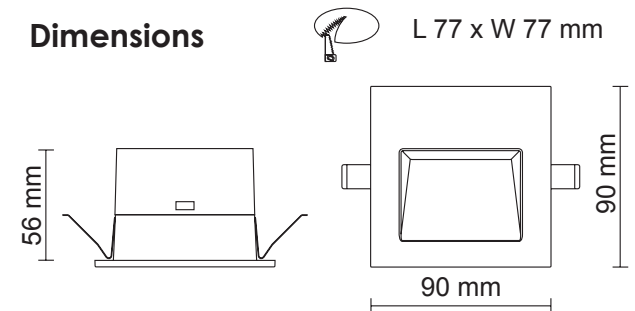

Photometric Data

S9312 at 3000K

Unit: cd C0/C180 C90/C270

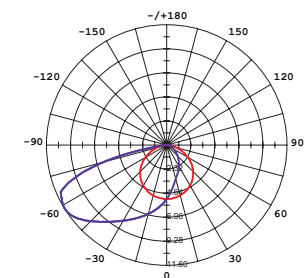

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9312	240/50	1	40	3000	> 80	80°	No	White

For terms of catalogue data use, refer to INDEX



AMBIENCE
S9313 – 1W

Stylish interior wall mount LED luminaire

Application


Residential hallways, bedrooms, stairways



Design Specifications

- Square aluminum face profile, powder coat white finish
- Integral 240V control gear
- CCT 3000K, 40lm
- IP54 front only
- Cut out: 77 x 77mm
- Double insulated

Dimensions

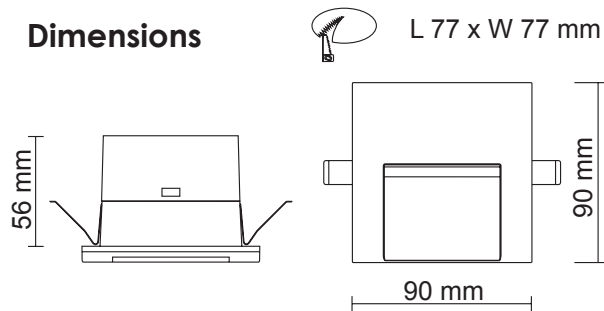

Performance


- Dimmable - No



Photometric Data

S9313 at 3000K

Unit: cd C0/C180 C90/C270

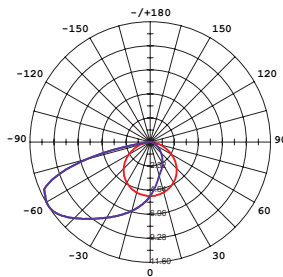

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9313	240/50	1	40	3000	> 80	80°	No	White

For interior products, the IP rating stated is from below the ceiling



AMBIENCE
S9314 – 1W

Stylish interior wall mount LED luminaire

Application


Residential hallways, bedrooms, stairways



Design Specifications

- Square aluminum face profile, powder coat white finish
- Integral 240V control gear
- CCT 3000K, 40lm
- IP54 front only
- Cut out: 77 x 77mm
- Double insulated

Dimensions

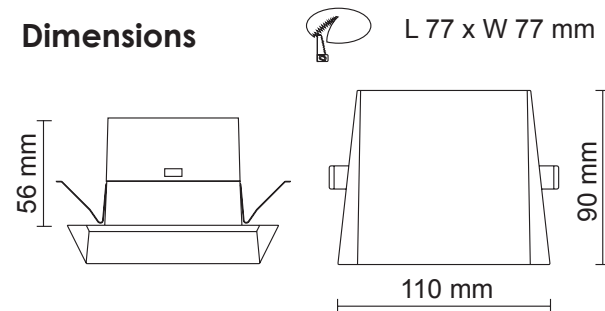

Performance


- Dimmable - No



Photometric Data

S9314 at 3000K

Unit: cd C0/C180 C90/C270

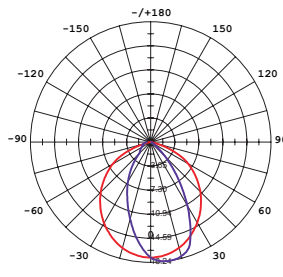

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9314	240/50	1	40	3000	> 80	80°	No	White

For terms of catalogue data use, refer to INDEX



ANOVA S9105 – 4W

Compact 4 watt recessed
LED cabinet luminaire

Application

Ideal for any residential or
commercial interior space

Design Specifications

- Durable die-cast aluminium body profile
- White powder coat or satin nickel finish
- High efficiency LED optics
- CCT choice of 3000K / 4000K / 6000K
- 12V DC LED driver required, suitable drivers - PLUTO6DV, PLUTO15DV, PLUTO40DV, PLUTO60DV

Performance

- Dimmable - No



Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9105WW/WH	12V DC	4	280	3000	> 80	90°	No	White
S9105CW/WH	12V DC	4	280	4000	> 80	90°	No	White
S9105DL/WH	12V DC	4	280	6000	> 80	90°	No	White
S9105WW/SN	12V DC	4	280	3000	> 80	90°	No	Satin Nickel
S9105CW/SN	12V DC	4	280	4000	> 80	90°	No	Satin Nickel
S9105DL/SN	12V DC	4	280	6000	> 80	90°	No	Satin Nickel

For interior products, the IP rating stated is from below the ceiling



ANOVA SR S9105 SR – 4W

Compact 4 watt surface mount
LED cabinet luminaire

Application

Ideal for any residential or
commercial interior space

Design Specifications

- Durable die-cast aluminium downlight profile and aluminium surface mount trim
- White powder coat or satin nickel finish
- High efficiency LED optics
- CCT choice of 3000K / 6000K
- 12V DC LED driver required, suitable drivers - PLUTO6DV, PLUTO15DV, PLUTO40DV, PLUTO60DV

Performance

- Dimmable - No




Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9105WW SR/WH	12V DC	4	280	3000	> 80	90°	No	White
S9105DL SR/WH	12V DC	4	280	6000	> 80	90°	No	White
S9105WW SR/SN	12V DC	4	280	3000	> 80	90°	No	Satin Nickel
S9105DL SR/SN	12V DC	4	280	6000	> 80	90°	No	Satin Nickel

For terms of catalogue data use, refer to INDEX




Dimensions

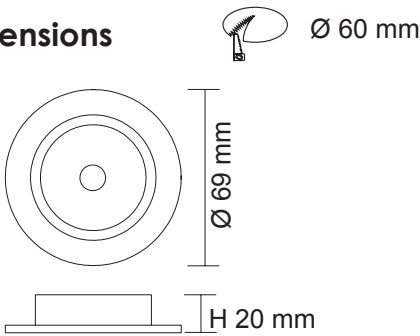


Photometric Data

S9105WW at 3000K

Unit: cd C0/C180 C90/C270

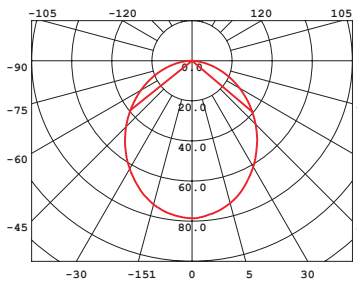


Dimensions

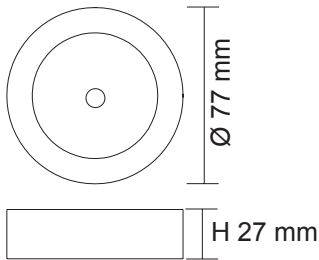

Photometric Data

S9105WW SR at 3000K

Unit: cd C0/C180 C90/C270

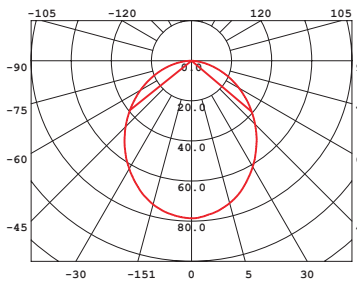



ANOVA ST S9105 ST – 4W

Compact 4 watt surface mount
LED cabinet luminaire


Application

Ideal for any residential or
commercial feature lighting

Design Specifications

- Durable die-cast aluminium body profile
- White powder coat or satin nickel finish
- High efficiency LED optics
- CCT choice of 3000K or 6000K
- 12V DC remote driver required,
suitable drivers - PLUTO6DV, PLUTO15DV,
PLUTO40DV, PLUTO60DV

Dimensions

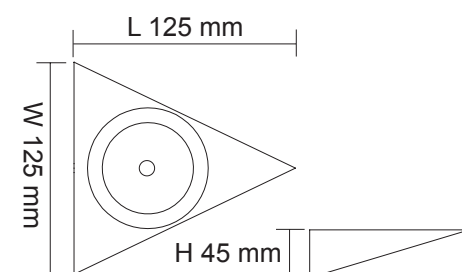

Performance


- Dimmable - No



Photometric Data

S9105WW ST at 3000K

Unit: cd C0/C180 — C90/C270

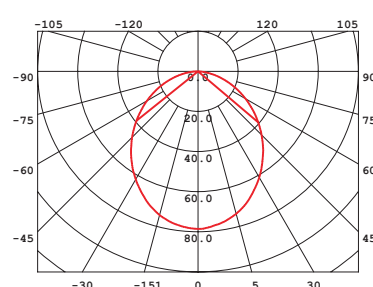

Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9105WW ST/WH	12V DC	4	280	3000	> 80	90°	No	White
S9105DL ST/WH	12V DC	4	280	6000	> 80	90°	No	White
S9105WW ST/SN	12V DC	4	280	3000	> 80	90°	No	Satin Nickel
S9105DL ST/SN	12V DC	4	280	6000	> 80	90°	No	Satin Nickel

For interior products, the IP rating stated is from below the ceiling



BROOM S9311 – 3W

Recessed 3 watt LED square
profile wall luminaire



Application

Ideal for any residential or
commercial interior space

Design Specifications

- Durable aluminium body profile
- White powder coat or satin nickel finish
- High efficiency LED optics, beam
distribution 105°
- CCT choice of 3000K, 4000K or 6000K
- Opal acrylic diffuser
- 12V AC MINI60 or DC remote driver
required, PLUTO6DV, PLUTO15DV,
PLUTO40DV, PLUTO60DV,

Dimensions

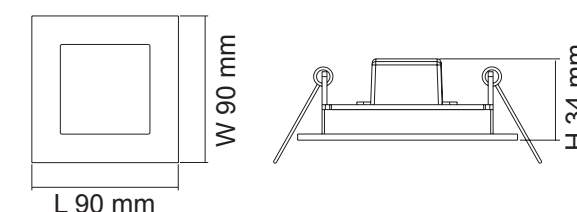

Performance


- Dimmable - No



Photometric Data

S9311 at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9311 WH	12V AC/DC	3	110	3000	> 80	105°	No	White
S9311 SN	12V AC/DC	3	110	3000	> 80	105°	No	Satin Nickel
S9311CW WH	12V AC/DC	3	110	4000	> 80	105°	No	White
S9311DL SN	12V AC/DC	3	110	6000	> 80	105°	No	Satin Nickel

For terms of catalogue data use, refer to INDEX



DARHAM ROUND S9317 – 1.5W

LED 1.5 watt recessed round
profile wall luminaire

Application


Ideal for any residential stairs, walkways or
commercial interior space

Design Specifications


- Durable die-cast aluminium body profile
- White powder coat finish
or anodized silver
- High efficiency LED optics, CCT 3000K
- Opal acrylic diffuser with glass cover
- 12V AC MINI60 or DC remote driver
required, PLUTO6DV, PLUTO15DV,
PLUTO40DV, PLUTO60DV

Performance

- Dimmable - No

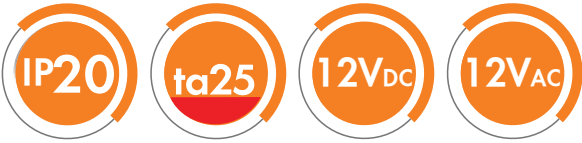


Dimensions

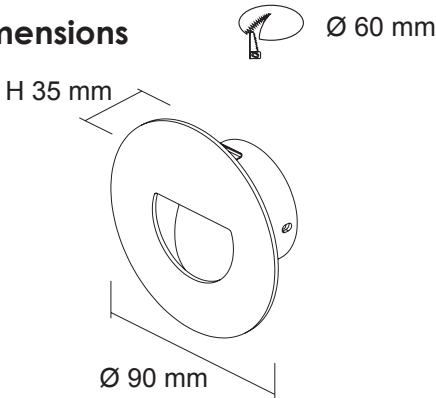

Photometric Data

S9317 at 3000K

Unit: cd C0/C180 — C90/C270

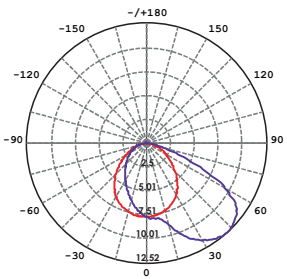

Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
S9317 WH	12V AC/DC	1.5	110	3000	> 80	No	White
S9317 ALU	12V AC/DC	1.5	110	3000	> 80	No	Anodized Silver

For interior products, the IP rating stated is from below the ceiling



DARHAM ROUND S9317 - 1.5W

Image courtesy of QCE,
photography Indie Lane Tourquay





DARHAM SQUARE S9316 – 1.5W

LED 1.5 watt recessed square
profile wall luminaire

Application


Ideal for any residential stairs, walkways or
commercial interior space

Design Specifications

- Durable die-cast aluminium body profile
- White powder coat finish
or anodized silver
- High efficiency LED optics, CCT 3000K
- Opal acrylic diffuser with glass cover
- 12V AC MINI60 or DC remote driver
required, PLUTO6DV, PLUTO15DV,
PLUTO40DV, PLUTO60DV
- Optional pre-install wall box available




Dimensions

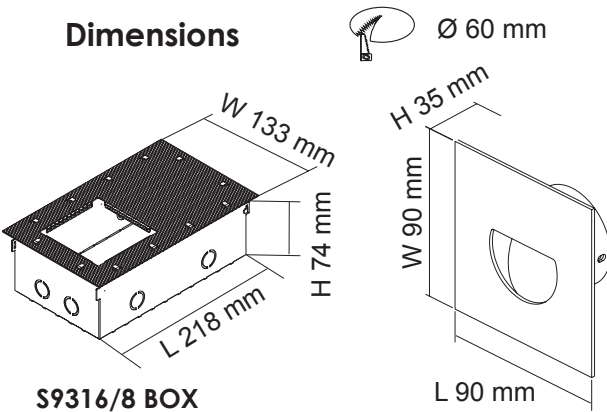


Photometric Data

Unit: cd C0/C180 C90/C270

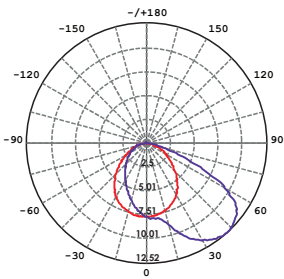

Performance

- Dimmable - No

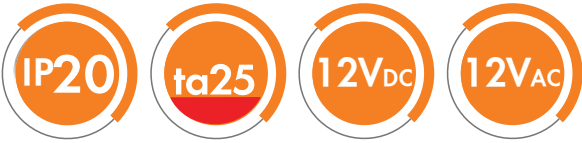

Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
S9316 WH	12V AC/DC	1.5	110	3000	> 80	No	White
S9316 ALU	12V AC/DC	1.5	110	3000	> 80	No	Anodized Silver
S9316/8 BOX	Concrete BOX FOR S9316/S9318						

For interior products, the IP rating stated is from below the ceiling



HALO SPL3000 – 18W/35W


Dimmable architectural LED
pendant luminaire

Application


A creative design for residential or
commercial spaces

Design Specifications

- Slim disc like appearance,
18 or 35 watt models
- Durable polycarbonate body profile
with opal acrylic diffuser
- High efficiency LED optics,
18 or 35 watt models, CCT 4000K
- Integral constant current trailing
edge dimmable LED driver
- Suspension kits provided
(standard length 1.5 m and adjustable)
- Standard trim colour black

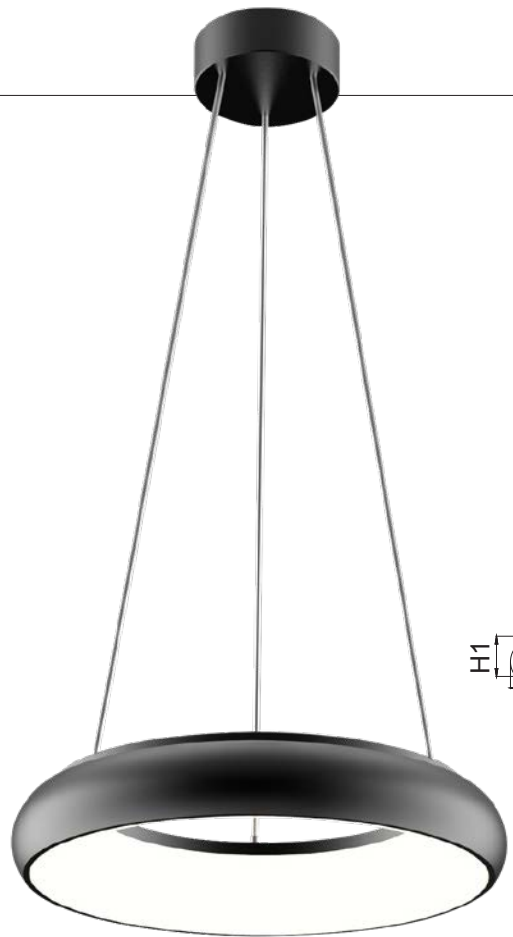


Dimensions

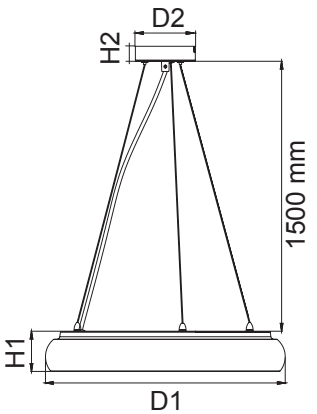

Photometric Data

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270

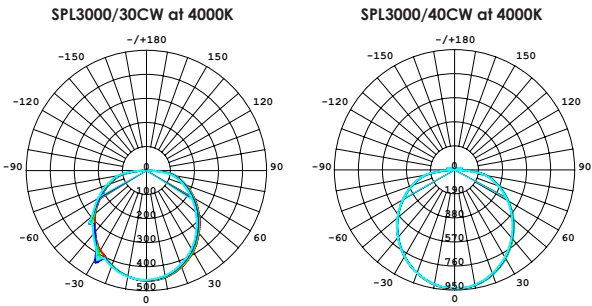

Performance

- Dimmable - Trailing edge



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour	Dimensions (D1 x H1, D2 x H2 mm)
SPL3000/30CW	240/50	18	1450	4000	> 80	Yes	Black	Ø 300 x 51, Ø 100 x 25
SPL3000/40CW	240/50	35	3300	4000	> 80	Yes	Black	Ø 400 x 68, Ø 130 x 35

For terms of catalogue data use, refer to INDEX



LEEMAN S9318 – 1.5W

LED 1.5 watt recessed square profile and square cut-out wall luminaire

Application

Residential stairs, walkways and interior commercial features

Design Specifications

- Durable aluminium body profile
- Matt white powder coat finish or anodized silver
- High efficiency LED optics, CCT 3000K, beam distribution 86°
- Frosted glass diffuser
- 12V AC MINI60 or DC remote driver required, PLUTO6DV, PLUTO15DV, PLUTO40DV, PLUTO60DV
- Optional pre-install wall box available

Performance

- Dimmable - No




Technical Specifications


Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
S9318 AS	12V AC/DC	1.5	70	3000	> 80	86°	Anodized Silver
S9318 MW	12V AC/DC	1.5	70	3000	> 80	86°	Matt White
S9316/8 BOX	Concrete BOX FOR S9316/S9318						



Dimensions

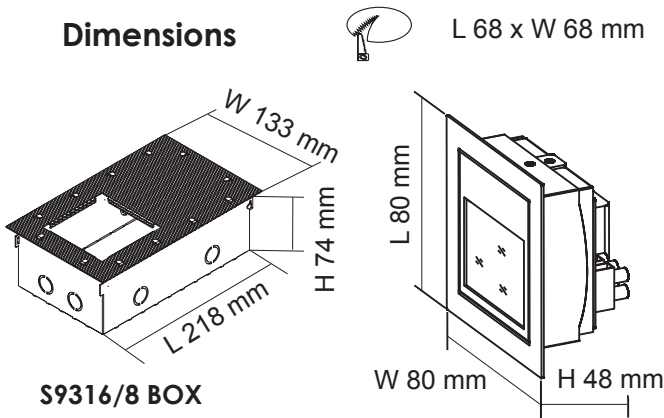

Photometric Data

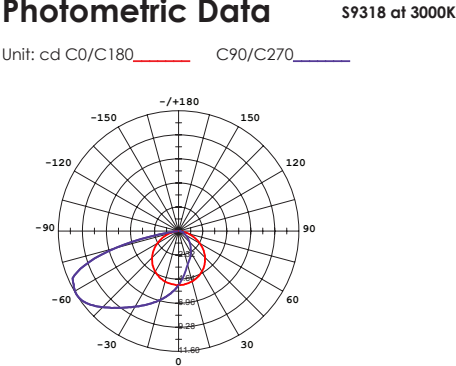

For interior products, the IP rating stated is from below the ceiling



LEEMAN MINI S9319 – 1.5W

LED 1.5 watt recessed MINI square profile and square cut-out wall luminaire

Application

Residential stairs, walkways and commercial features

Design Specifications

- Durable aluminium body profile
- White powder coat finish or anodized silver
- High efficiency LED optics, CCT 3000K, beam distribution 86°
- Frosted glass diffuser
- 12V AC MINI60 or DC remote driver required, PLUTO6DV, PLUTO15DV, PLUTO40DV, PLUTO60DV

Performance

- Dimmable - No




Technical Specifications


Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
S9319 AS	12V AC/DC	1.5	70	3000	> 80	86°	Anodized Silver
S9319 MW	12V AC/DC	1.5	70	3000	> 80	86°	Matt White



Dimensions

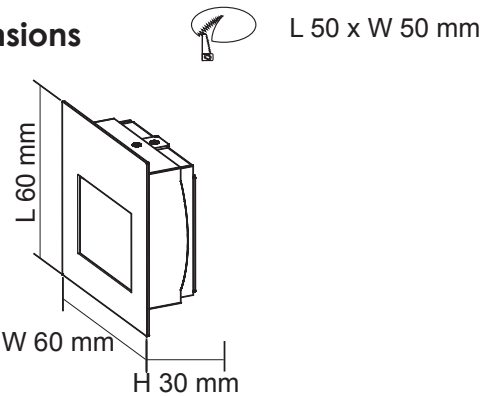

Photometric Data

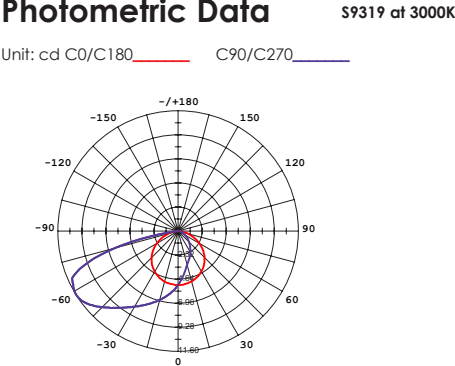

For terms of catalogue data use, refer to INDEX



LOUNGE III
S9327 – 10W/18W

10/18 watt decorative IP54 architectural
LED wall mount luminaire

Application

Ideal for any residential or commercial
interior or exterior space

Design Specifications

- Durable aluminium body profile
- White or black powder coat finish
- High efficiency LED optics
- CCT choice of 3000K or 5000K
- UP/DOWN optical performance
- Integral non-dimmable driver


S9327/150 BK



S9327/150 WH



S9327/300 BK

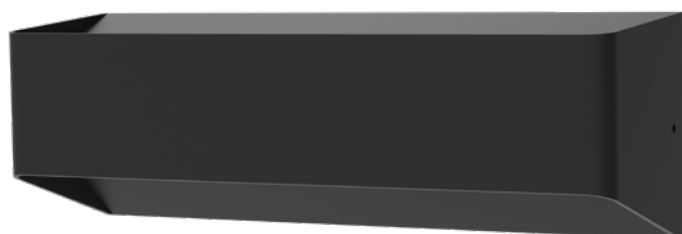

S9327/300 WH



Performance


- Dimmable - No




Photometric Data

S9327/300WW at 3000K


Unit: cd C0/C180 C90/C270




For interior products, the IP rating stated is from below the ceiling

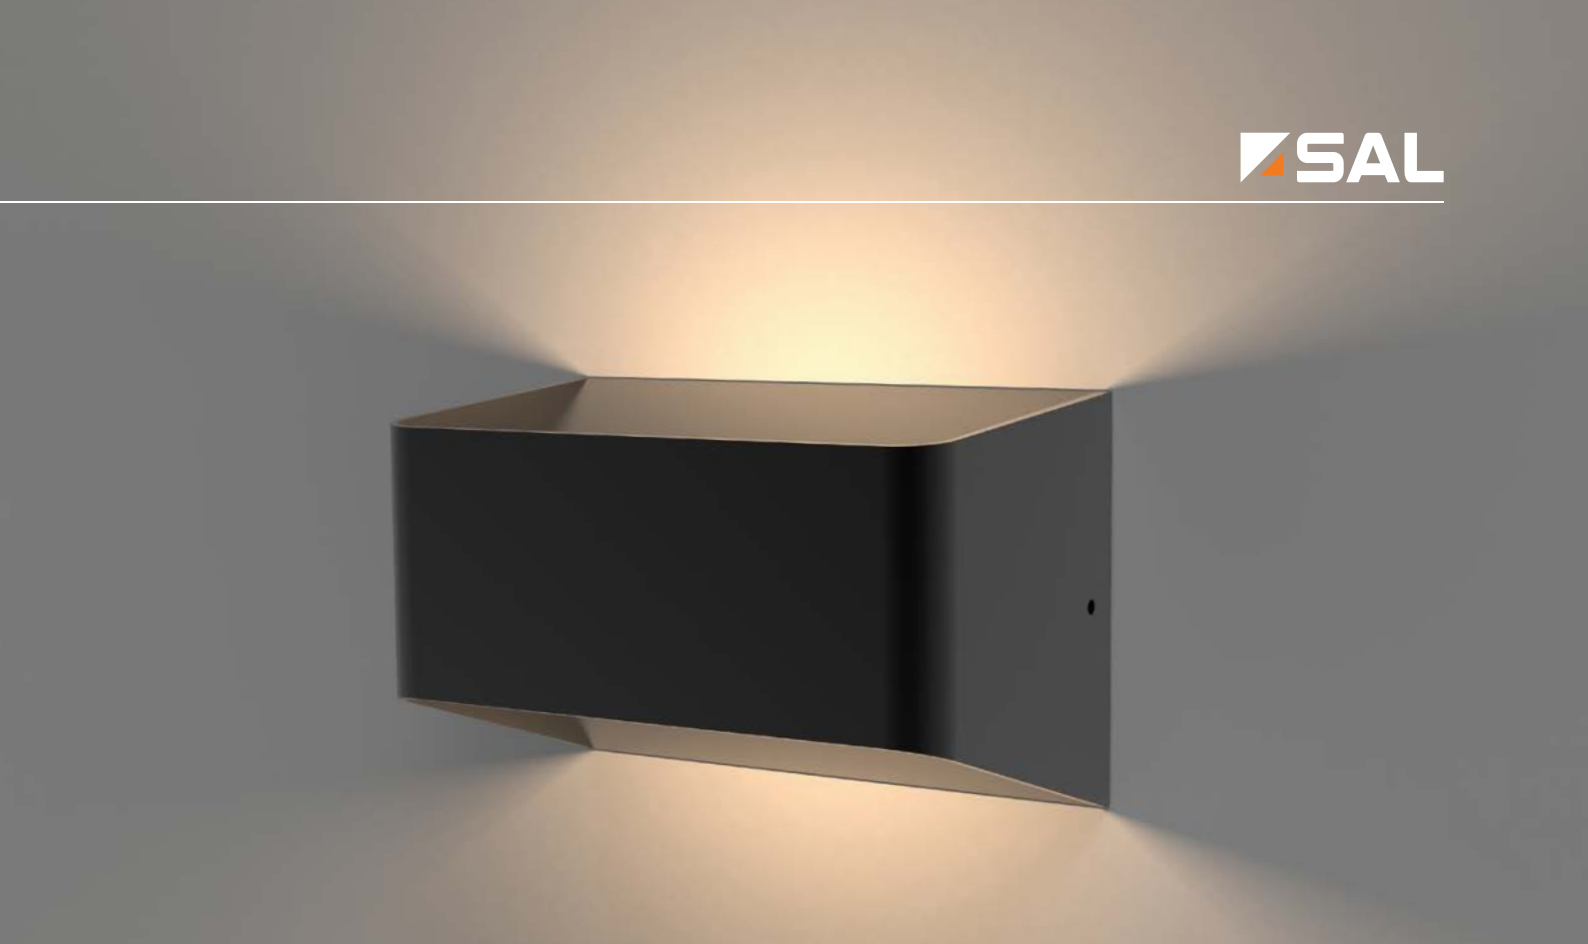

Dimensions

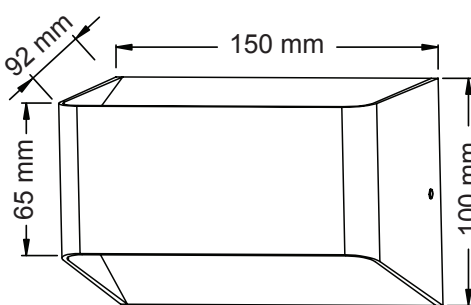

S9327/150

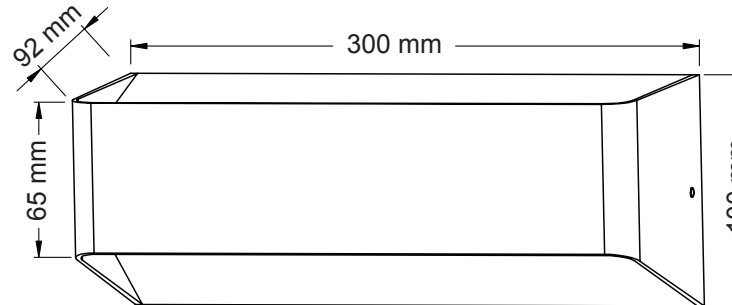

S9327/300

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (L x W x H mm)
S9327/150WW/WH	240/50	10	400	3000	> 80	White	150 x 100 x 92
S9327/150WW/BK	240/50	10	400	3000	> 80	Black	150 x 100 x 92
S9327/150NDL/WH	240/50	10	500	5000	> 80	White	150 x 100 x 92
S9327/150NDL/BK	240/50	10	500	5000	> 80	Black	150 x 100 x 92
S9327/300WW/WH	240/50	18	720	3000	> 80	White	300 x 100 x 92
S9327/300WW/BK	240/50	18	720	3000	> 80	Black	300 x 100 x 92
S9327/300NDL/WH	240/50	18	900	5000	> 80	White	300 x 100 x 92
S9327/300NDL/BK	240/50	18	900	5000	> 80	Black	300 x 100 x 92

For terms of catalogue data use, refer to INDEX



UD S9356 – 3W/12W

Adjustable LED surface mount profile
wall luminaires

Application

Ideal for any residential or
commercial interior space

Design Specifications

- Durable aluminium body profile
- White powder coat finish
- High efficiency LED optics, CCT 3000K
- Up & Down beam angle adjustable
from -60° to +60°
- Integral non-dimmable LED driver,
3 or 12 watt models


Performance

- Dimmable - optional, trailing edge
refer model No.




S9356/160WW/WH

Dimensions

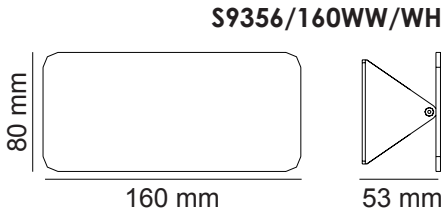

S9356/160WW/WH

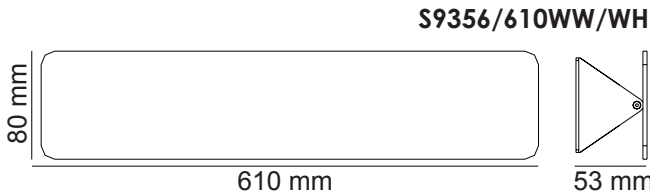


S9356/610WW/WH


Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
S9356/160WW/WH	240/50	3	250	3000	> 80	No	White
S9356/610WW/WH	240/50	12	800	3000	> 80	Optional	White

For interior products, the IP rating stated is from below the ceiling

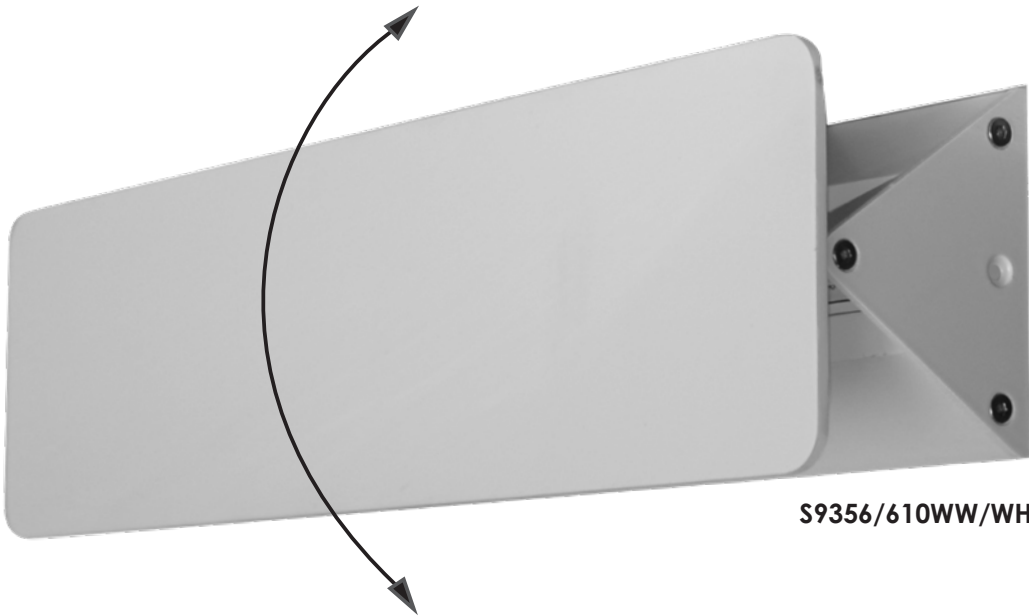

S9356/610WW/WH

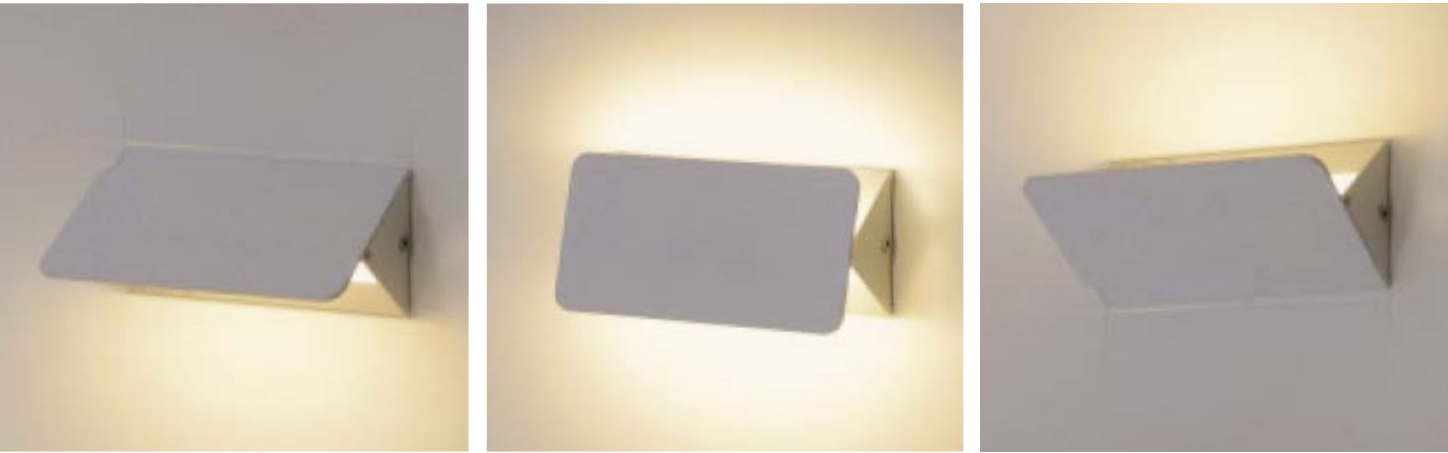

For terms of catalogue data use, refer to INDEX

SMARTER LIGHTING CHOICES



🏠 SAL National Pty Ltd - 40 Biloela St, Villawood NSW 2163

☎ + 61 2 9723 3099

🌐 www.sal.net.au

✉ info@sal.net.au

🏠 VICT/TAS - 46/48 Keys Road Moorabbin VIC 3189

☎ + 61 3 9532 3168

✉ info@sal.net.au

🏠 QLD - 36 Whitelaw Place Richlands QLD 4077

☎ + 61 7 3879 5999

✉ info@sal.net.au

🏠 SA/NT - 79 Frederick St, Welland SA 5009

☎ +61 8 7084 1958

✉ info@sal.net.au

🏠 WA - 29 Beringarra Avenue Malaga WA 6090

☎ +61 8 9248 7458

✉ info@sal.net.au



2026/28