

SMARTER LIGHTING CHOICES



SAL Lighting a Smarter Future  



2026/28





An extensive suite of innovative LED Downlights, recessed or surface mount with a wide selection of colours and dimming choices.



An extensive suite of innovative LED Downlights, recessed or surface mount with a wide selection of colours and dimming choices.





AIRLEE S9605 TC - 15W/40W

15 - 40 watt IP65 surface mount
downlight with dimmable options

Application

Ideal for any retail, residential
or commercial interior space

Design Specifications


- Choice of 15, 30 or 40 watt
integral control gear, with
flickerCONTROLLED performance
- Selectable CCT 3000 / 4000 / 5700K
- Choice of black or white powder
coat finish
- Robust IP65 die-cast aluminium
body profile
- High performance multi-faceted
reflector profile, beam 60°, CRI>90
- IK06 rated



S9605/85/15TC/WH

S9605/85/15TC/BK


Dimensions



Photometric Data

S9605/85/15TC at 4000K

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270




For interior products, the IP rating stated is from below the ceiling




S9605/135/30TC/WH

S9605/135/30TC/BK



S9605/185/40TC/WH

S9605/185/40TC/BK

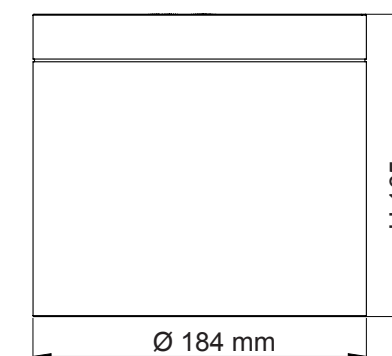

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9605/85/15TC/WH	240/50	15	1350/1500/1425	3000/4000/5700	> 90	60°	Yes	White
S9605/85/15TC/BK	240/50	15	1125/1275/1200	3000/4000/5700	> 90	60°	Yes	Black
S9605/135/30TC/WH	240/50	30	3000/3300/3150	3000/4000/5700	> 90	60°	No	White
S9605/135/30TC/BK	240/50	30	2400/2700/2550	3000/4000/5700	> 90	60°	No	Black
S9605/185/40TC/WH	240/50	40	4000/4400/4200	3000/4000/5700	> 90	60°	No	White
S9605/185/40TC/BK	240/50	40	3200/3600/3400	3000/4000/5700	> 90	60°	No	Black

For terms of catalogue data use, refer to INDEX



DUAL POWER

TC SELECTABLE COLOUR

ALBANY S9514TC - 28W/36W

Recessed LED rectangular shop light with selectable CCT and power

Application


Ideal for any retail or commercial interior space

Design Specifications

- Selectable CCT 3000K / 4000K / 5500K
- Selectable power setting 28W/36W
- Adjustable tilt up to 60°
- Remote non-dimmable LED driver, complete with flex & plug
- Stylish white or silver powder coat finish
- High efficiency LED optics
- Double insulated




Dimensions

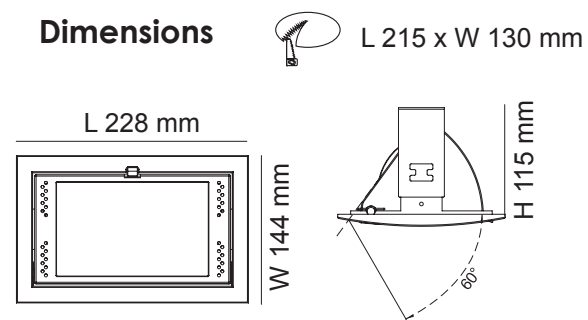

Photometric Data


S9514TC at 3000K

Unit: cd C0/C180 C90/C270



Performance

- Dimmable - Optional, Trailing edge, 1-10V, DALI / DSI

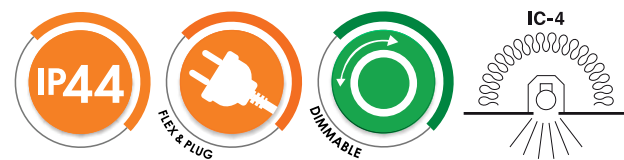

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9514TC WH	240/50	28/36	2800/3600	3000/4000/5500	> 80	100°	Optional	White
S9514TC SL	240/50	28/36	2800/3600	3000/4000/5500	> 80	100°	Optional	Silver

For interior products, the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR

BALMORAL S9087TC - 6W

6 watt dimmable LED downlight with selectable CCT, IP65 ABOVE & BELOW

Application


Ideal for any retail, residential or commercial interior space

Design Specifications

- Durable polyamide body form
- Stylish white body profile and white trim or black trim and reflector edge
- High performance multi-faceted reflector profile, beam 40°, UGR <19, CRI>90
- Integral, dimmable flickerCONTROLLED LED driver, with flex and plug for easy installation
- Selectable CCT 3000K / 4000K / 5700K
- IC - 4 rated, double insulated, IP65 above and below the ceiling




Dimensions

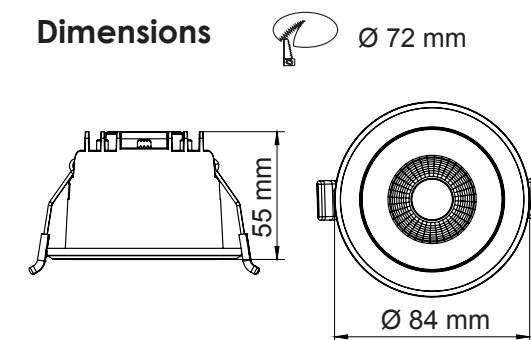

Photometric Data

S9087TC at 4000K

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270



Performance

- Dimmable, trailing edge



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9087TC/WH	240/50	6	500/550/550	3000/4000/5700	> 90	40°	Yes	White
S9087TC/BK	240/50	6	500/550/500	3000/4000/5700	> 90	40°	Yes	Black

For terms of catalogue data use, refer to INDEX



BALMORAL S9088TC/DP - 6W/9W

Selectable power 6 / 9 watt dimmable
LED downlight with selectable CCT, IP65
ABOVE & BELOW

BALMORAL S9089TC/DP - 9W/12W

Selectable power 9 / 12 watt dimmable
LED downlight with selectable CCT, IP65
ABOVE & BELOW

Application

Ideal for any retail, residential
or commercial interior space

Design Specifications

- Durable polyamide body form
- Stylish white body profile and white trim or black trim and reflector edge
- High performance multi-faceted reflector profile, beam 40°, UGR <19, CRI>90
- Integral, dimmable, multi-power flickerCONTROLLED LED driver, with flex and plug for easy installation
- Selectable CCT 3000K / 4000K / 5700K
- IC - 4 rated, double insulated, IP65 above and below the ceiling

Performance

- Dimmable, trailing edge




S9088TC/DP/BK

S9088TC/DP/WH




Dimensions

Ø 92 mm

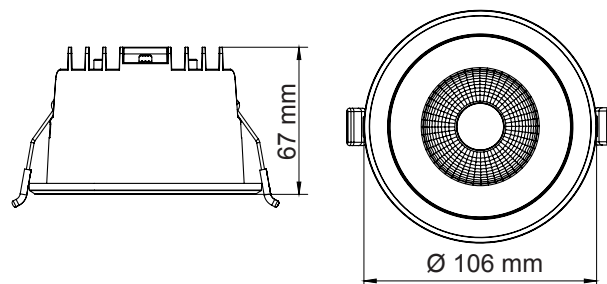

Photometric Data

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270

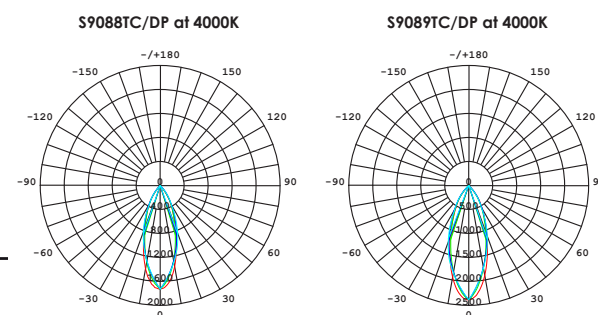

For interior products, the IP rating stated is from below the ceiling



DUAL POWER


S9089TC/DP/BK

S9089TC/DP/WH



Dimensions

Ø 120 mm

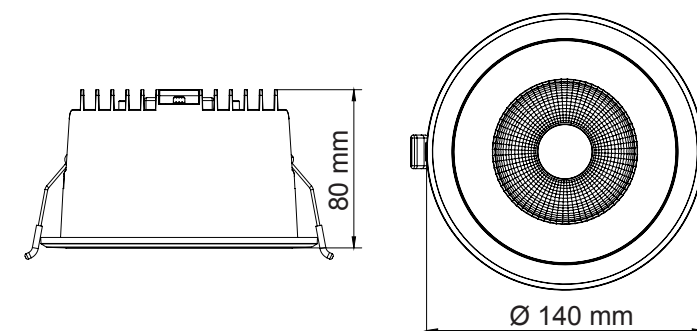

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9088TC/DP/WH	240/50	6 / 9	550/600/550 750/850/800	3000/4000/5700	> 90	40°	Yes	White
S9088TC/DP/BK	240/50	6 / 9	500/550/500 700/800/750	3000/4000/5700	> 90	40°	Yes	Black
S9089TC/DP/WH	240/50	9 / 12	900/1000/950 1150/1300/1250	3000/4000/5700	> 90	40°	Yes	White
S9089TC/DP/BK	240/50	9 / 12	850/950/900 1150/1300/1250	3000/4000/5700	> 90	40°	Yes	Black

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

CLARE S9062TC/S - 10W

Recessed LED downlight with PIR sensor control and selectable CCT

Application

Ideal for interior service areas, bathrooms and storage spaces

Design Specifications


- Selectable CCT 3000K / 4000K / 5700K
- Integral PIR sensor control with a fixed 90 second ON motion detection function, incorporating a light sensor function to engage when the lighting levels are <20lux
- Integral non-dimmable LED 10 watt control gear, IC - 4 rated, complete with flex & plug
- Stylish white trim with an opal PC diffuser
- Double insulated

Performance

- Non-dimmable




Dimensions

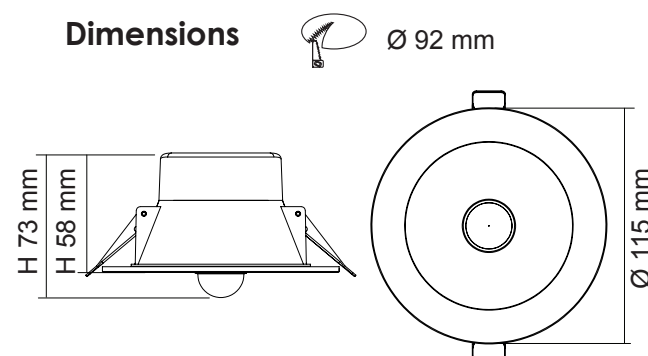

Photometric Data

S9062TC/S at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9062TC/S	240/50	10	760/800/850	3000/4000/5700	> 80	90°	No	White

For interior products, the IP rating stated is from below the ceiling



COOLUM PLUS RIPPLESHIELD S9068TW35/RS - 9W

9 watt dimmable LED downlight, UGR<19, with tunable WHITE and rippleSHIELD

Application

Ideal for any residential or commercial interior space, experiencing nuisance ripple induced flicker

Design Specifications

- Combined with the SAL SDD400RS/BTAM dimmer, the rippleSHIELD Coolum eliminates ALL nuisance non-visible and visible flicker caused by ripple injection
- Integral 9 watt rippleSHIELD dimmable LED driver, with smooth dimming performance down to 1.0% of light output, designed with flex and plug for easy installation.
- Tunable WHITE from 3000K to 6500K
- High efficiency LED optics, multi-faceted optical system, 60° beam distribution, UGR<19, CRI>90
- Polyamide trim and body, choice of white or black
- CA-90 rated, double insulated, Dimmable, only with SDD400RS/BTAM rippleSHIELD

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimension D x H (mm)
S9068TW35WH/RS	240/50	9	800/830/810	3000/4000/6500	60°	White	Ø 103 x 91
S9068TW35BK/RS	240/50	9	570/630/610	3000/4000/6500	60°	Black	Ø 103 x 91


For terms of catalogue data use, refer to INDEX



S9068TW35BK/RS

S9068TW35WH/RS

Dimensions

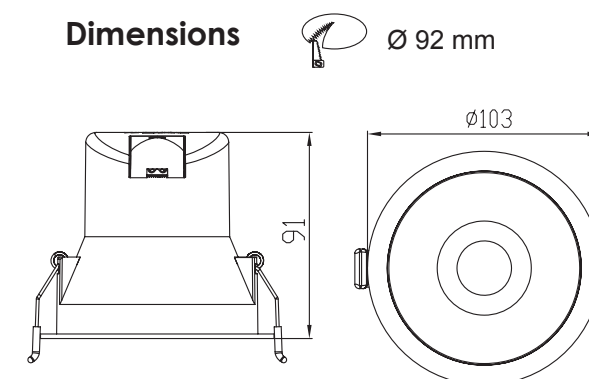

Performance

- Dimmable - Yes





COOLUM PLUS S9067TC - 6W

6 watt dimmable LED downlight,
UGR<19, with selectable CCT

Application


Ideal for any residential or
commercial interior space

Design Specifications

- 6 watt integral flickerCONTROLLED dimmable driver, complete with flex & plug
- High efficiency LED optics, multi-faceted optical system
- Selectable CCT 3000K / 4000K / 5700K, CRI 80, 60° beam distribution, UGR<19
- Polyamide trim and body in white or black
- IC - 4 rated, double insulated



Dimensions

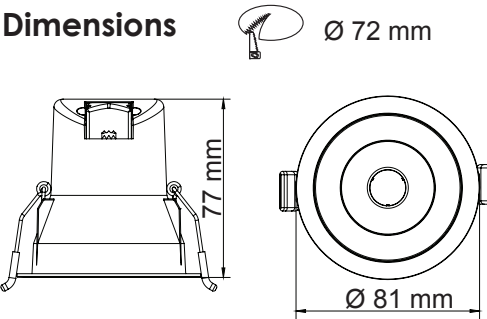


Performance

- Dimmable, trailing edge



Photometric Data

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9067TC/WH	240/50	6	480/530/510	3000/4000/5700	> 90	60°	Yes	White
S9067TC/BK	240/50	6	420/470/440	3000/4000/5700	> 90	60°	Yes	Black

For interior products, the IP rating stated is from below the ceiling



COOLUM PLUS S9068TC - 9W

9 watt dimmable LED downlight,
UGR<19, with selectable CCT

Application


Ideal for any residential or
commercial interior space

Design Specifications

- 9 watt integral flickerCONTROLLED dimmable driver, complete with flex & plug
- High efficiency LED optics, multi-faceted optical system
- Selectable CCT 3000K / 4000K / 5700K, CRI>80, 60° beam distribution, UGR<19
- Polyamide trim and body in white or black
- IC - 4 rated, double insulated



Dimensions

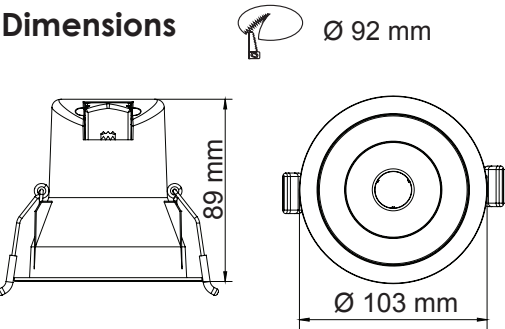


Performance

- Dimmable, trailing edge



Photometric Data

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9068TC/WH	240/50	9	700/800/750	3000/4000/5700	> 90	60°	Yes	White
S9068TC/BK	240/50	9	570/630/610	3000/4000/5700	> 90	60°	Yes	Black

For terms of catalogue data use, refer to INDEX



COOLUM PLUS S9068TC/FG - 9W

9 watt dimmable LED downlight, UGR<19, with selectable CCT and flickerGUARD

Application


Ideal for any residential or commercial interior space, experiencing nuisance harmonic induced flicker

Design Specifications

- The innovative flickerGUARD Coolum responds to both visual and non-visual harmonic induced flicker.
- Integral flickerGUARD trailing edge dimmable LED driver, with smooth dimming performance and flex and plug
- High efficiency LED optics, multi-faceted optical system, 60° beam distribution, UGR<19
- Selectable CCT 3000K / 4000K / 5700K
- White or black polyamide trim and body
- IC - 4 rated, double insulated




Dimensions

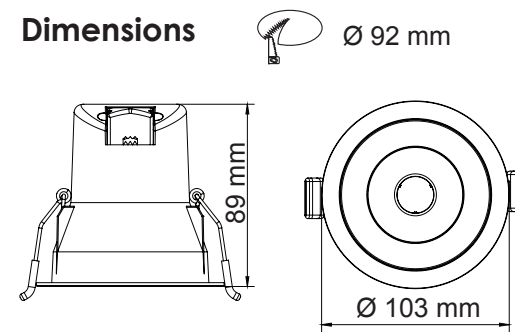

Photometric Data

S9068TC/WH/FG at 4000K

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270



Performance

- Dimmable, trailing edge



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9068TC/WH/FG	240/50	9	700/800/750	3000/4000/5700	> 90	60°	Yes	White
S9068TC/BK/FG	240/50	9	570/630/610	3000/4000/5700	> 90	60°	Yes	Black

For interior products, the IP rating stated is from below the ceiling



COOLUM PLUS S9069TC - 12W

12 watt dimmable LED downlight, UGR<19, with selectable CCT

Application


Ideal for any residential or commercial interior space

Design Specifications

- 12 watt integral constant current dimmable driver complete with flex & plug for easy installation
- High efficiency LED optics, multi-faceted optical system
- Selectable CCT 3000K / 4000K / 5700K, CRI>80, 60° beam distribution, UGR<19
- Polyamide trim and body form available in white or black
- IC - 4 rated, double insulated




Dimensions

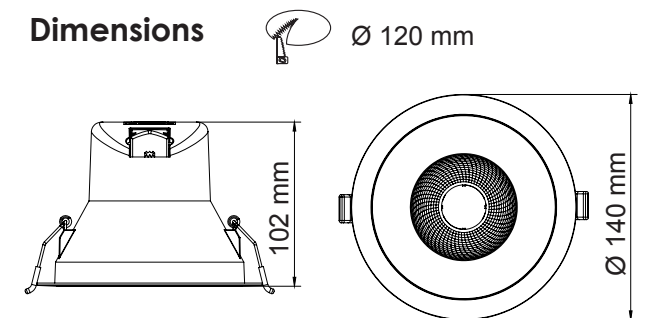

Photometric Data


S9069TC/WH at 4000K

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270



Performance

- Dimmable, trailing edge

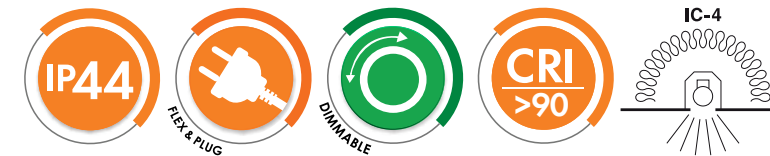

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9069TC/WH	240/50	12	840/920/900	3000/4000/5700	> 90	60°	Yes	White
S9069TC/BK	240/50	12	680/740/720	3000/4000/5700	> 90	60°	Yes	Black

For terms of catalogue data use, refer to INDEX



COOLUM PLUS S9167TC - 6W

6 watt dimmable, LED TILT
downlight, with selectable CCT

Application


Ideal for any residential or
commercial interior space



Design Specifications

- 6 watt integral flickerCONTROLLED dimmable driver, complete with flex & plug for easy installation
- High efficiency LED optics, multi-faceted optical system
- Selectable CCT 3000K / 4000K / 5700K, CRI > 80, 60° beam distribution
- Polyamide trim and body in white or black
- IC - 4 rated, double insulated

Dimensions

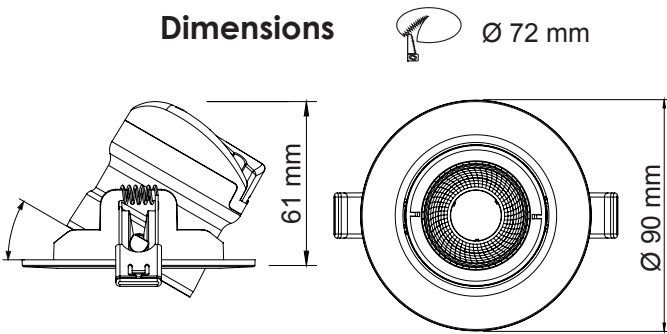

Performance


- Dimmable, trailing edge



Photometric Data

S9167TC/WH at 4000K

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9167TC/WH	240/50	6	500/560/540	3000/4000/5700	> 90	60°	Yes	White
S9167TC/BK	240/50	6	500/560/540	3000/4000/5700	> 90	60°	Yes	Black

For interior products, the IP rating stated is from below the ceiling



COOLUM PLUS S9168TC - 9W

9 watt dimmable, LED TILT
downlight, with selectable CCT

Application


Ideal for any residential or
commercial interior space



Design Specifications

- 9 watt integral flickerCONTROLLED dimmable driver, complete with flex & plug for easy installation
- High efficiency LED optics, multi-faceted optical system
- Selectable CCT 3000K / 4000K / 5700K, CRI > 80, 60° beam distribution
- Polyamide trim and body in white or black
- IC - 4 rated, double insulated

Dimensions

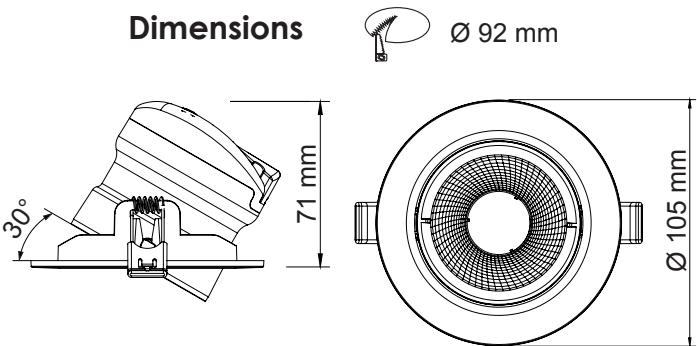

Performance


- Dimmable, trailing edge



Photometric Data

S9168TC/WH at 4000K

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9168TC/WH	240/50	9	750/830/810	3000/4000/5700	> 90	60°	Yes	White
S9168TC/BK	240/50	9	750/830/810	3000/4000/5700	> 90	60°	Yes	Black

For terms of catalogue data use, refer to INDEX



ECOGEM S9041 TC - 10W

Dimmable 10 watt LED downlight,
with selectable CCT, IP44

Application


Ideal for any residential or
commercial interior space

Design Specifications

- Selectable CCT 3000K / 4200K / 5700K
- IC - 4 rated, durable die-cast aluminium body profile
- White powder coat finish or Satin Nickel
- Remote trailing edge dimmable LED driver, with flex and plug
- High efficiency LED optics with an opal polycarbonate diffuser
- White surface mount options available
- Colour trim options: Black (S9041 BK RING), Silver (S9041 SL RING)



Dimensions

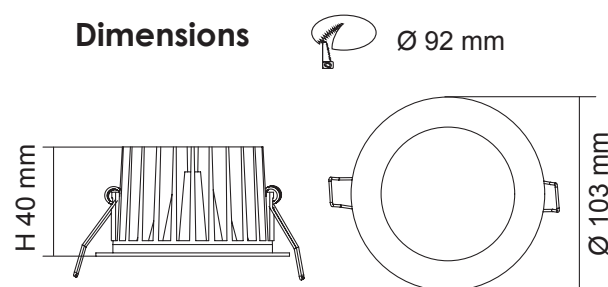

Performance


- Dimmer Type, Trailing edge
- Dimming Options, 1-10V, DALI / DSI



Photometric Data

S9041 TC at 3000K

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9041 TC WH	240/50	10	850/1000/900	3000/4200/5700	> 90	90°	Yes	White
S9041 TC SN	240/50	10	850/1000/900	3000/4200/5700	> 90	90°	Yes	Satin Nickel
S9041TC/BK	240/50	10	850/1000/900	3000/4200/5700	> 90	90°	Yes	Black

For interior products, the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR

ECOGEM SQUARE S9041 TC S - 10W

Dimmable 10 watt LED downlight with
selectable CCT, IP44.

Application


Ideal for any residential or
commercial interior space

Design Specifications

- Selectable CCT 3000K / 4200K / 5700K
- Durable die-cast aluminium square body profile, IC-4 rated
- Trim colour choice of white or satin nickel
- Remote constant current trailing edge dimmable LED driver, with flex and plug
- High efficiency LED optics, opal polycarbonate diffuser.
- High performance, HO 13W model available




Dimensions

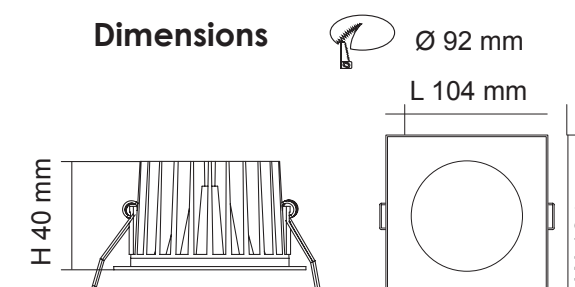

Performance


- Dimmer Type, Trailing edge
- Dimming Options, 1-10V, DALI / DSI

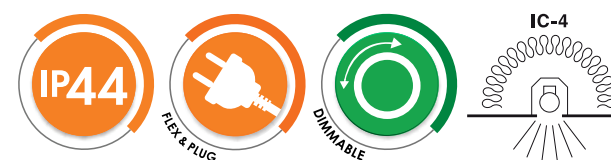

Photometric Data

S9041 TC S at 3000K

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9041 TC S WH	240/50	10	800/900/850	3000/4200/5700	> 80	90°	Yes	White
S9041 TC S SN	240/50	10	800/900/850	3000/4200/5700	> 80	90°	Yes	Satin Nickel

For terms of catalogue data use, refer to INDEX



**ECOGEM FLICKERGUARD
S9041TC2 FG - 10W**

Dimmable 10 watt LED downlight with
selectable CCT and **flickerGUARD**

Application

Ideal for any residential or commercial
interior space, experiencing nuisance
harmonic induced flicker

Design Specifications


- The innovative flickerGUARD Ecogem
responds to both visual and non-visual
harmonic induced flicker.
- Trailing edge dimmable LED driver, with
smooth dimming performance and
flex & plug
- High efficiency LED optics with an opal
polycarbonate diffuser
- Selectable CCT 3000K / 4200K / 5700K
- Durable Polyamide, reinforced aluminium
body profile and white trim.
- Colour trim options: Black (S9041 BK RING),
Silver (S9041 SL RING),
Satin Nickel (S9041 SN RING)
- IC - 4 rated, double insulated

Performance

- Dimmable, trailing edge




Dimensions Ø 92 mm

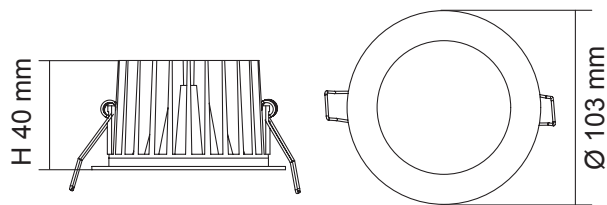

Photometric Data S9041TC2WH/FG at 4000K

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9041TC2WH/FG	240/50	10	850/1000/900	3000/4200/5700	> 90	90°	Yes	White

For interior products, the IP rating stated is from below the ceiling



**FlickerGUARD,TM
MORE THAN
FLICKER
CONTROL.**

Fed up with LED flicker? The solution is the innovative flickerGUARDTM series from
SAL, offering a reliable solution for visual and non-visual harmonic flicker.



TC SELECTABLE COLOUR

ECOGEM S9041HO/TC - 13W

High output dimmable 13 watt LED
downlight, with selectable CCT, IP44

Application


Ideal for any residential or
commercial interior space

Design Specifications

- Selectable CCT 3000K / 4200K / 5700K
- Durable die-cast aluminium body profile
- Stylish white powder coat finish
- Remote, trailing edge dimmable LED driver, with flex and plug
- High efficiency LED optics with an opal polycarbonate diffuser
- Colour trim options: Black (S9041 BK RING), Silver (S9041 SL RING), Satin Nickel (S9041 SN RING)
- IC - 4 rated, double insulated




Dimensions

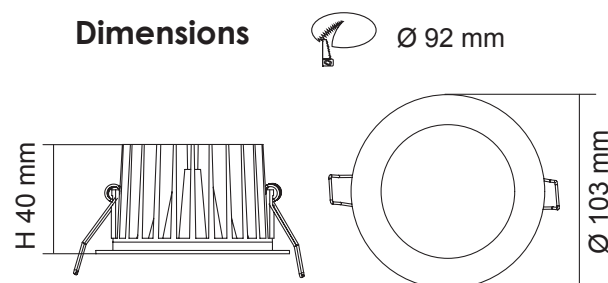

Photometric Data

S9041HO/TC at 3000K

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270



Performance

- Dimmer Type, Trailing edge
- Dimming Options, 1-10V, DALI / DSI



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9041HO/TC/WH	240/50	13	1040/1170/1105	3000/4200/5700	> 80	90°	Yes	White

For interior products, the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR

ECOGEM II S9041TC2 - 10W

Dimmable 10 watt LED downlight,
with selectable CCT, IP44.

Application


Ideal for any residential or
commercial interior space

Design Specifications

- Selectable CCT 3000K/4200K/5700K
- Durable Polyamide, reinforced aluminium body profile, white trim
- Trailing edge dimmable LED driver, with flex and plug
- High efficiency LED optics with an opal polycarbonate diffuser
- Colour trim options: Black (S9041 BK RING), Silver (S9041 SL RING), Satin Nickel (S9041 SN RING)
- IC - 4 rated, double insulated




Dimensions

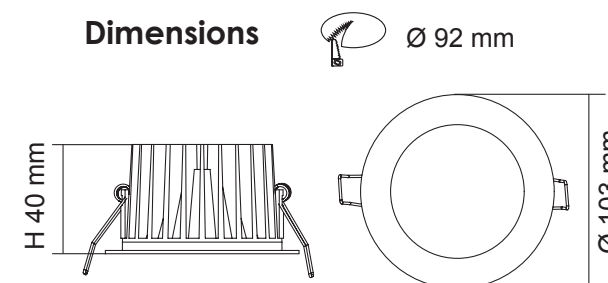

Photometric Data

S9041TC2WH at 3000K

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270



Performance

- Dimmer Type, Trailing edge



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9041TC2WH	240/50	10	850/1000/900	3000/4200/5700	> 80	90°	Yes	White

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

ECOGEM SURFACE MOUNT S9041SM/TC - 10W

Surface mount dimmable LED downlight with selectable CCT

Application

Ideal for any surface mount, residential or commercial interior space design

Design Specifications


- Selectable CCT 3000K / 4200K / 5700K
- Precise pressed metal surface mount profile
- White powder coat finish
- SAL S9041TC LED downlight kit included
- High efficiency LED optics with an opal polycarbonate diffuser
- IP20

Performance

- Dimmer Type, Trailing edge
- Dimming Options, 1-10V, DALI / DSI




Dimensions



Photometric Data

S9041SM/TC/WH at 3000K

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9041SM/TC/WH	240/50	10	850/1000/900	3000/4200/5700	> 90	90°	Yes	White
S9041SM/TC2WH	240/50	10	850/1000/900	3000/4200/5700	> 80	90°	Yes	White
S9041HO/SM/TC/WH	240/50	13	1040/1170/1105	3000/4200/5700	> 80	90°	Yes	White

For interior products, the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR

ECOSTAR S9048TC - 12W

Dimmable 12 watt LED downlight, with selectable CCT, IP54.

Application


Ideal for any residential or commercial interior space

Design Specifications

- Selectable CCT 3000K / 4000K / 5000K
- Durable die-cast aluminium body profile
- Stylish powder coat or plated finish
- High output LED optics
- Multi-faceted reflector, 55° beam
- Remote, trailing edge dimmable LED driver, with flex and plug
- White surface mount options available, 145hm, x Ø152mm (S9048SM/TC/WH)
- IC - 4 rated, double insulated


Performance

- Dimmer Type, Trailing edge
- Dimming Options, 1-10V, DALI / DSI

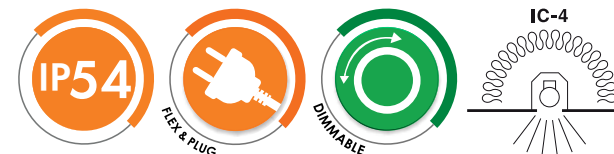

Dimensions


Ø 92 mm

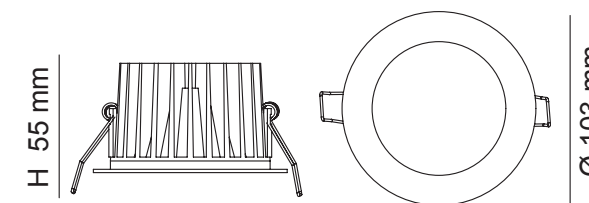

Photometric Data

S9048TC/WH at 3000K

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270

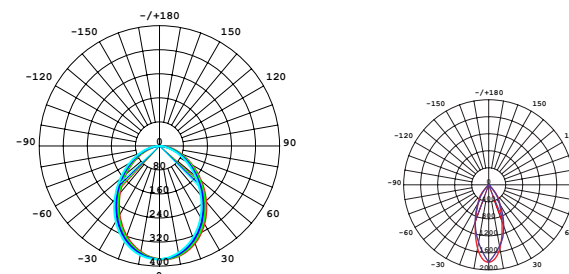

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9048TC/WH	240/50	12	1000/1200/1100	3000/4000/5000	> 80	55°	Yes	White
S9048SM/TC/WH	240/50	12	1000/1200/1100	3000/4000/5000	> 80	55°	Yes	White

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

ECOSTAR S9045TC - 9W

Dimmable 9 watt **FIXED** LED
downlight, with selectable CCT.

Application


Ideal for any residential or
commercial interior space

Design Specifications

- Durable die-cast aluminium body profile
- Stylish white powder coat or satin nickel
- High output LED optics, CRI>80
- Selectable CCT 3000K/4000K/5700K
- Remote, trailing edge, dimmable LED driver, with flex and plug
- IC - 4 rated, double insulated



Dimensions

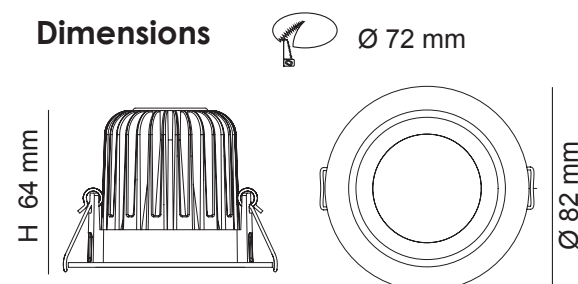

Performance


- Dimmer Type, Trailing edge
- Dimming Options, 1-10V, DALI / DSI



Photometric Data

S9045TC at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9045TC/WH	240/50	9	800/800/850	3000/4000/5700	> 80	60°	Yes	White
S9045TC/SN	240/50	9	800/800/850	3000/4000/5700	> 80	60°	Yes	Satin Nickel

For interior products, the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR

ECOSTAR S9046TC - 9W

Dimmable 9 watt **GIMBAL** LED
downlight, with selectable CCT.

Application


Ideal for any residential or
commercial interior space

Design Specifications

- Durable die-cast aluminium body profile
- Stylish white powder coat or satin nickel
- Versatile gimbal head with 30° tilt
- High output LED optics, CRI > 80
- Selectable CCT 3000K/4000K/5700K
- Remote, trailing edge, dimmable LED driver with flex and plug
- White surface mount options available, 145hm, x Ø152mm (S9046SM/TC/WH)
- IC - 4 rated, double insulated




Dimensions

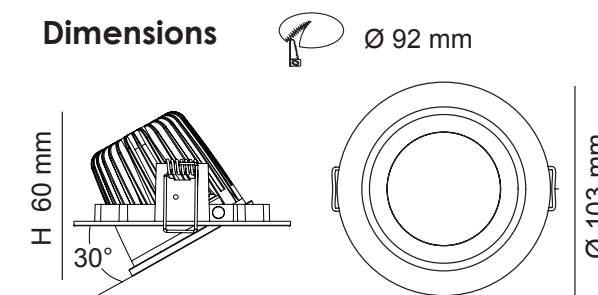

Performance


- Dimmer Type, Trailing edge
- Dimming Options, 1-10V, DALI / DSI

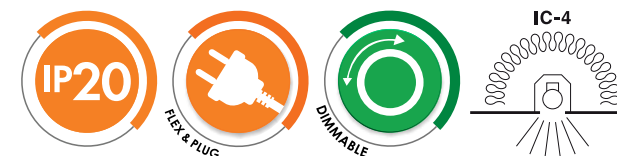

Photometric Data

S9046TC at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9046TC/WH	240/50	9	800/800/850	3000/4000/5700	> 80	60°	Yes	White
S9046TC/SN	240/50	9	800/800/850	3000/4000/5700	> 80	60°	Yes	Satin Nickel
S9046SM/TC/WH	240/50	9	800/800/850	3000/4000/5700	> 80	60°	Yes	White

For terms of catalogue data use, refer to INDEX

BENTO S9691
SQUARE PROFILE
IP44 LED
DOWNLIGHT.

PRODUCT
INFO GUIDE

BLADE LED BATTEN
SL9707TC LOW PROFILE
WIDE BODY

PRODUCT
INFO GUIDE

BLADE LED BATTEN
SL9709TC LOW PROFILE
WIDE BODY

PRODUCT
INFO GUIDE

BRIGHTSTAR ECO
SE7199 LED
FLOODLIGHTS

PRODUCT
INFO GUIDE

THE VERSATILE
CANOPY LED
SHP205

PRODUCT
INFO GUIDE

COOPER III

PRODUCT
INFO GUIDE

COOLUM
PLUS
S9167TC.

PRODUCT
INFO GUIDE

COOPER II

PRODUCT
INFO GUIDE

ECOLINE XV
SL9731TC/DP

PRODUCT
INFO GUIDE

ECOLINE SL9738 LED
WIDE DIFFUSED BATTEN

PRODUCT
INFO GUIDE

EMERGENCY
EXIT
SELK1500EX2

PRODUCT
INFO GUIDE

THE NEW
QUICK CONNECT
ESS107

PRODUCT
INFO GUIDE

STREAMLINE
LOW PROFILE
FRISBEE
SL2104TC

PRODUCT
INFO GUIDE

THE NEW
GIBRALTAR SL9722 TC
LED VANDALPROOF
BATTEN

PRODUCT
INFO GUIDE

RENMARK D
LED DOWNLIGHTS

PRODUCT
INFO GUIDE

COOLUM
PLUS
S9168TC.

PRODUCT
INFO GUIDE

SLIMLINE SEAMLESS
TC LINKABLE SL9706

PRODUCT
INFO GUIDE

PIXIE AMBIENCE
SMART SOCKET

PRODUCT
INFO GUIDE

STARPAD II
SE7071 TC
FLOODLIGHT

PRODUCT
INFO GUIDE

THE NEW UFO
SHB23MP150TC
LED HIGHBAY

PRODUCT
INFO GUIDE

WAVE SE
S9065TC LED
DOWNLIGHT

PRODUCT
INFO GUIDE

WIDELINE SL9733TC/DP

PRODUCT
INFO GUIDE

BISMARCK II
S9794 LED PANEL

PRODUCT
INFO GUIDE

UFO SHB23SE
HIGH BAY

PRODUCT
INFO GUIDE

COOLUM
PLUS
S9069TC.

PRODUCT
INFO GUIDE

ALTONA
SQUARE OR
ROUND LED
WALL
LUMINAIRES.

PRODUCT
INFO GUIDE

BRIGHT STAR
LED FLOODLIGHT
SE7199

PRODUCT
INFO GUIDE

BUNKER 15
TC ROUND

PRODUCT
INFO GUIDE

BUNKER 15
TC OVAL

PRODUCT
INFO GUIDE



SAL YouTube
PRODUCT GUIDES,
MORE INFORMATION,
EASY TO FIND



TC SELECTABLE COLOUR

ECOSTAR II GIMBAL S9146TC2 - 10W

Dimmable, **GIMBAL** 10 watt LED
downlight with selectable CCT.

Application

Ideal for any residential or
commercial interior space

Design Specifications

- Durable die-cast aluminium
body profile 30° gimbal
- Stylish white powder coat finish
- High output LED optics
- Multi-faceted reflector system, 60°
beam distribution
- Polycarbonate optical lens
- Remote, trailing edge dimmable LED
driver, with flex and plug
- Double insulated
- White surface mount options
available, 145mm x Ø152mm
(S9146SM/TC2WH)

Performance


- Dimmer Type, Trailing edge
- Dimming Options, 1-10V, DALI / DSI



Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9146TC2WH	240/50	10	750/900/850	3000/4000/5700	> 80	60°	Yes	White
S9146SM/TC2WH	240/50	10	750/900/850	3000/4000/5700	> 80	60°	Yes	White

For terms of catalogue data use, refer to INDEX

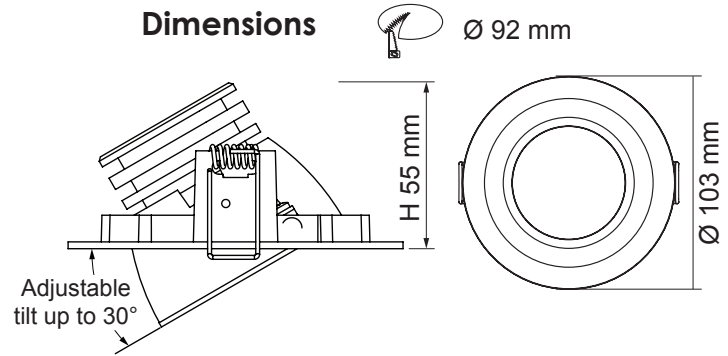

Photometric Data S9146TC2 at 3000K

Unit: cd C0/C180 C90/C270





DUAL POWER
TC SELECTABLE COLOUR

EXMOUTH S9522TC - 15W/22W

Recessed 15/22 watt LED circular shop light with selectable CCT and power

Application


Ideal for any retail or commercial interior space

Design Specifications

- Selectable CCT 3000K / 4000K / 5500K
- Selectable power 15W/22W
- Durable die-cast aluminium body profile, with white or silver trim
- Remote, non-dimmable LED driver, with flex and plug
- High efficiency LED optics with an opal polycarbonate diffuser
- IC - 4 rated, double insulated

Performance

- Dimmable - Optional, Trailing edge, 1-10V, DALI / DSI

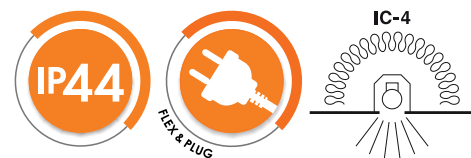


Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9522TC WH	240/50	15/22	1500/2100	3000/4000/5500	> 80	105°	Optional	White
S9522TC SL	240/50	15/22	1500/2100	3000/4000/5500	> 80	105°	Optional	Silver




Dimensions

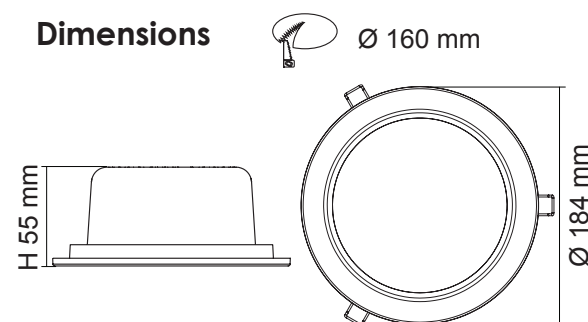

Photometric Data

S9522TC at 3000K

Unit: cd C0/C180 C90/C270



For interior products, the IP rating stated is from below the ceiling



DUAL POWER
TC SELECTABLE COLOUR

EXMOUTH S9523TC - 28W/40W

Recessed 28/40 watt LED circular shop light with selectable CCT and power

Application

Ideal for any retail or commercial interior space

Design Specifications

- Selectable CCT 3000K / 4000K / 5500K
- Selectable power 28W/40W
- Durable die-cast aluminium body profile, with white or silver trim
- Remote, non-dimmable LED driver, with flex and plug
- High efficiency LED optics with an opal polycarbonate diffuser
- IC - 4 rated, double insulated
- IP20 surface mount options available 160mm x Ø 240mm (S9523SM/TC/WH)

Performance

- Dimmable - Optional, Trailing edge, 1-10V, DALI / DSI




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9523TC WH	240/50	28/40	2800/3800	3000/4000/5500	> 80	105°	Optional	White
S9523TC SL	240/50	28/40	2800/3800	3000/4000/5500	> 80	105°	Optional	Silver
S9523TC/WH/SM	240/50	28/40	2800/3800	3000/4000/5500	> 80	105°	Optional	White




Dimensions

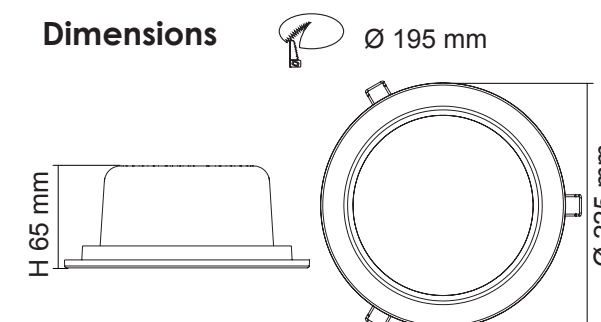

Photometric Data

S9523TC at 3000K

Unit: cd C0/C180 C90/C270



For terms of catalogue data use, refer to INDEX



DUAL POWER

TC SELECTABLE COLOUR

NEWMAN MKIII
S9545TC DP2 - 28W/38W

Rotatable & retractable LED Shoplight
with selectable CCT and power

Application

Ideal for any retail or commercial
interior space

Design Specifications

- Durable die-cast aluminium body profile, with white trim
- Selectable CCT 3000K / 4000K / 5700K
- Selectable power 28W/38W
- Opal PMMA diffuser
- High efficiency LED optics, 90° reflector system
- Remote, non-dimmable, dual power LED driver, with flex and plug
- Double insulated


Performance

- Dimmable - Optional, Trailing edge, 1-10V, DALI / DSI




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9545TC/WH/DP2	240/50	28 38	2100/2400/2200 2600/3200/2800	3000/4000/5700	> 80	90°	Optional	White

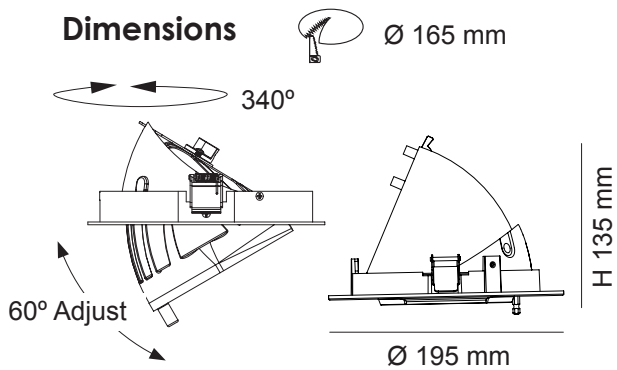

Photometric Data S9545TC/WH/DP2 at 3000K

Unit: cd C0/C180 C90/C270



For interior products, the IP rating stated is from below the ceiling

Image courtesy of Anita Cirson



TC SELECTABLE COLOUR

NEWMAN IV S9525 TC - 12W/35W

Retractable & rotatable LED Shoplight, with selectable CCT, selectable power and dimming options

Application

Ideal for any retail or commercial interior space

Design Specifications

- Durable die-cast aluminium body profile in three convenient sizes
- Stylish white powder coat finish
- Optimum tilting function 340° horizontal plane, 60° vertical plane
- High output LED optics, 36° beam distribution with a multi-faceted reflector system, CRI>90
- Selectable CCT 2700/4000/6000K
- Remote, flickerCONTROLLED LED driver with flex and plug and optional dimming and selectable power functions - 12 watt dimmable only or 15/20/25 watt or 25/30/35 watt with non-dimmable and selectable power functions.


Performance

- Dimmer Type, Trailing edge, refer model No.
- Dimming Options, 1-10V, DALI / DSI



MULTI POWER


Dimensions

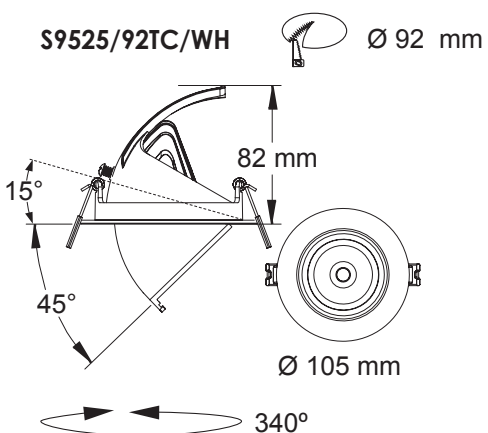

Photometric Data

S9525/92TC/WH at 4000K



Unit: cd C0/C180 — C90/C270



For interior products, the IP rating stated is from below the ceiling



SAL

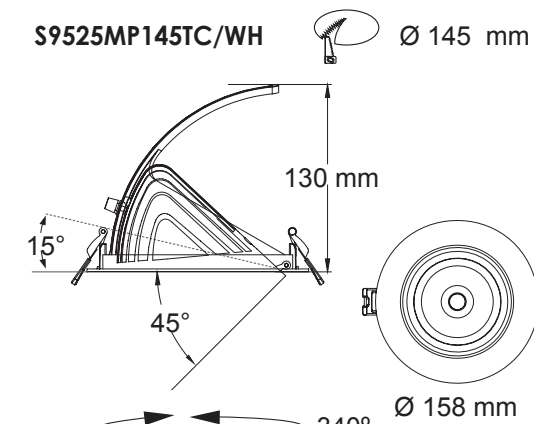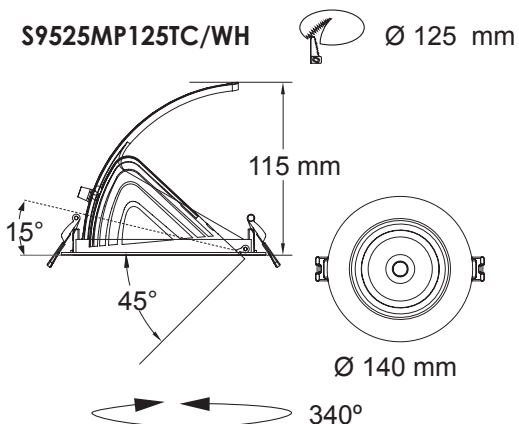

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
S9525/92TC/WH	240/50	12	850/1000/950	2700/4000/6000	> 90	Yes	White
S9525MP125TC/WH	240/50	15 20 25	1600/1850/1900 1950/2250/2300 2300/2650/2650	2700/4000/6000	> 90	No	White
S9525MP145TC/WH	240/50	25 30 35	2650/2950/3050 3050/3350/3450 3350/3700/3750	2700/4000/6000	> 90	No	White

For terms of catalogue data use, refer to INDEX



PENTE S9086C5MP - 10W

Dimmable LED downlight, CRI90 with 5 x selectable CCT and selectable power with flickerCONTROLLED technology, IP44

Application


Ideal for any residential or commercial interior space

Design Specifications

- Selectable CCT 3000K/3500/4000K/5000/6000K
- Opal polycarbonate diffuser and body
- Integral flickerCONTROLLED trailing edge dimmable LED driver, with selectable power functions 6/8/10 watt
- High efficiency LED optics CRI>90
- IC - 4 rated, double insulated, IP44 from below
- Deco ring options:
Satin Nickel (S9065SN/RING),
Black (S9065BK/RING)




Dimensions

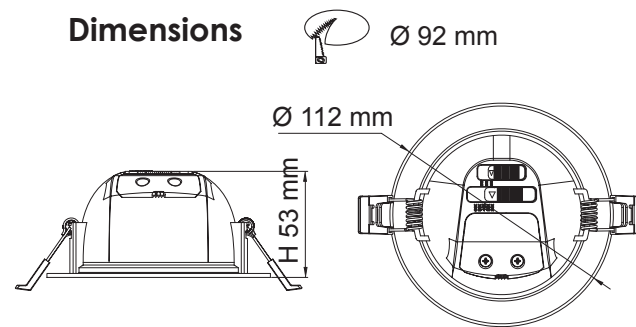

Photometric Data

S9086C5MP at 3000K

Unit: cd C0/C180 C90/C270



Performance

- Dimmable - Trailing edge



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable
S9086C5MP	240/50	6 8 10	620/650/680/690/690 830/860/900/900/900 1000/1050/1200/1100/1100	3000/3500/4000 /5000/6000	> 90	100°	Yes

For interior products, the IP rating stated is from below the ceiling



POPPI S9041R/TC2WH - 9W

9 watt dimmable LED downlight, CRI80, with selectable CCT

Application


Perfect for residential or commercial applications

Design Specifications

- 9 watt remote flickerCONTROLLED dimmable driver, complete with flex & plug
- High efficiency LED optics, recessed low glare optical system
- Selectable CCT 3000K / 4000K / 5700K, CRI>80, 60° beam distribution
- Polyamide covered aluminium body profile with PC trim
- IC - 4 rated downlight and driver, double insulated
- IP54 from below the ceiling, IP40 above




Dimensions

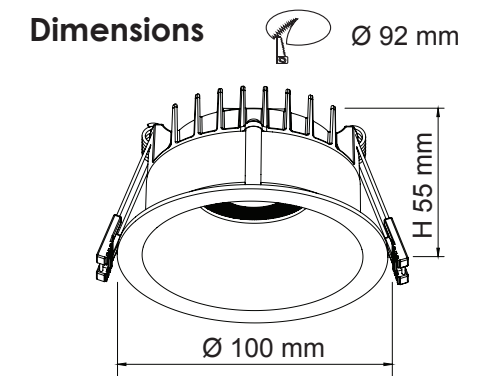

Photometric Data

S9041R/TC2WH at 4000K

Unit: cd C0/C180 C90/C270



Performance

- Dimmable - Trailing edge



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9041R/TC2WH	240/50	9	830/930/900	3000/4000/5700	> 80	60°	Yes	White

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

PREMIER S9071TC - 10W

Dimmable 10 watt LED downlight
with selectable CCT, IP64

Application


Ideal for any residential or commercial
interior space

Design Specifications

- Selectable CCT 3000K / 4000K / 5700K
- Premium aluminium body profile
- Stylish white or silver trim
- Recessed opal polycarbonate diffuser
- High efficiency LED optics
- Remote, trailing edge dimmable LED driver, with flex and plug
- IC - 4 rated, double insulated



Dimensions

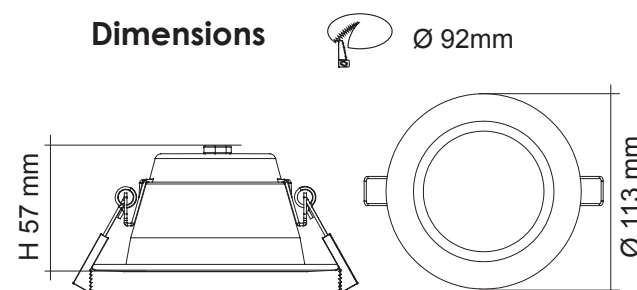

Performance


- Dimmable, Trailing edge
- Dimming Options, 1-10V, DALI / DSI



Photometric Data

S9071TC at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9071TC WH	240/50	10	900/1050/1000	3000/4000/5700	> 90	90°	Yes	White
S9071TC SL	240/50	10	900/1050/1000	3000/4000/5700	> 90	90°	Yes	Silver

For interior products, the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR

PREMIER S9072TC - 14W

Dimmable 14 watt LED downlight
with selectable CCT, IP64.

Application


Ideal for any residential or
commercial interior space

Design Specifications

- Selectable CCT 3000K / 4000K / 5700K
- Premium aluminium body profile
- Stylish white or silver trim
- Recessed opal polycarbonate diffuser
- High efficiency LED optics
- Remote, trailing edge dimmable LED driver, with flex and plug
- IC - 4 rated, double insulated



Dimensions

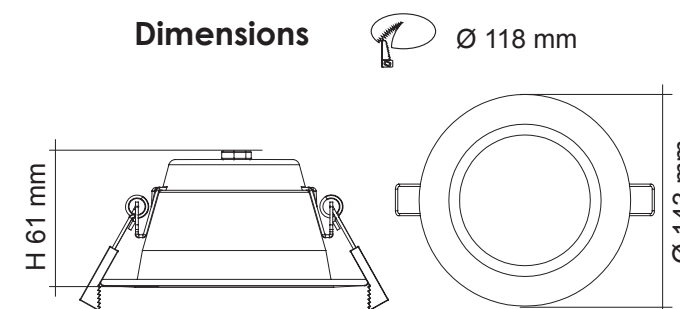

Performance


- Dimmable, Trailing edge
- Dimming Options, 1-10V, DALI / DSI



Photometric Data

S9072TC at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9072TC WH	240/50	14	1200/1350/1300	3000/4000/5700	> 90	90°	Yes	White
S9072TC SL	240/50	14	1200/1350/1300	3000/4000/5700	> 90	90°	Yes	Silver

For terms of catalogue data use, refer to INDEX



DUAL POWER
TC SELECTABLE COLOUR

PREMIER S9073TC DP - 13W/18W

Dimmable 13/18 watt LED downlight with selectable CCT and power, IP64

Application


Ideal for any residential or commercial interior space

Design Specifications

- Selectable CCT 3000K / 4000K / 5700K
- Premium aluminium body, IC-4 rated
- Stylish white or silver trim
- Recessed opal polycarbonate diffuser
- High efficiency LED optics
- Remote, trailing edge dimmable, dual power, LED driver, with flex and plug
- Double insulated



Dimensions

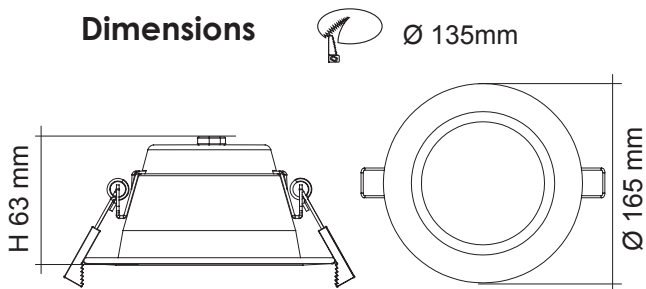

Performance


- Dimmable, Trailing edge
- Dimming Options, 1-10V, DALI / DSI



Photometric Data

S9073TC/WH/DP at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9073TC/WH/DP	240/50	13/18	1250/1400/1350 1600/1800/1700	3000/4000/5700	> 90	90°	Yes	White
S9073TC/SL/DP	240/50	13/18	1250/1400/1350 1600/1800/1700	3000/4000/5700	> 90	90°	Yes	Silver

For interior products, the IP rating stated is from below the ceiling



DUAL POWER
TC SELECTABLE COLOUR

PREMIER S9074TC DP/HP - 10W/20W

10/20 watt LED downlight with selectable CCT and power, IP64

Application


Ideal for any residential or commercial interior space

Design Specifications

- Premium aluminium body, IC-4 rated
- Selectable CCT 3000K / 4000K / 5700K
- Stylish white trim
- Recessed opal polycarbonate diffuser
- High efficiency LED optics
- (S9074DP) remote, non-dimmable, dual power LED driver, with flex and plug
- (S9074HP) trailing edge dimmable driver
- Double insulated



Dimensions

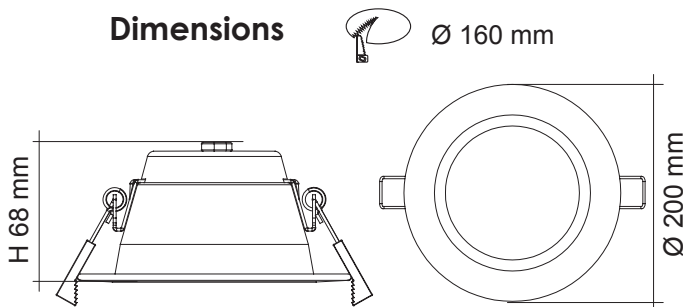

Performance


- Dimmable - Refer model No.
- Dimmer Type, Trailing edge
- Dimming Options, 1-10V, DALI / DSI



Photometric Data

S9074TC/WH/DP at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9074TC/WH/HP	240/50	10	1000/1100/1000	3000/4000/5700	> 90	90°	Yes	White
S9074TC/WH/DP	240/50	15/20	1650/1900/1800 1800/2100/2000	3000/4000/5700	> 90	90°	Optional	White

For terms of catalogue data use, refer to INDEX



DUAL POWER

TC SELECTABLE COLOUR

PREMIER S9075TC DP/HP - 14W/30W

14/30 watt LED downlight with selectable CCT and power, IP64

Application


Ideal for any residential or commercial interior space

Design Specifications

- Premium aluminium body, IC-4 rated
- Selectable CCT 3000K / 4000K / 5700K
- Stylish white trim
- Recessed opal polycarbonate diffuser
- High efficiency LED optics
- (S9075DP) remote, non-dimmable, dual power LED driver, with flex and plug
- (S9075HP) trailing edge dimmable driver
- Double insulated



Dimensions

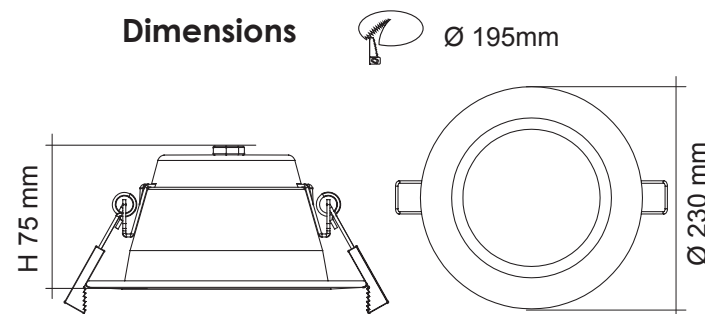

Performance


- Dimmable - Refer model No.
- Dimmer Type, Trailing edge
- Dimming Options, 1-10V, DALI / DSI



Photometric Data

S9075TC/WH/DP at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9075TC/WH/HP	240/50	14	1500/1650/1650	3000/4000/5700	> 90	90°	Yes	White
S9075TC/WH/DP	240/50	23/30	2100/2400/2300/2850/3400/3100	3000/4000/5700	> 90	90°	Optional	White

For interior products, the IP rating stated is from below the ceiling



DUAL POWER

TC SELECTABLE COLOUR

PREMIER S9076TC DP/HP - 20W/40W

Non-dimmable 20/40 watt LED downlight with selectable CCT and power, IP64

Application


Ideal for any residential or commercial interior space

Design Specifications

- Premium aluminium body, IC-4 rated
- Stylish white trim
- Recessed opal polycarbonate diffuser
- High efficiency LED optics
- Remote, non-dimmable, dual power LED driver, with flex and plug
- Double insulated



Dimensions

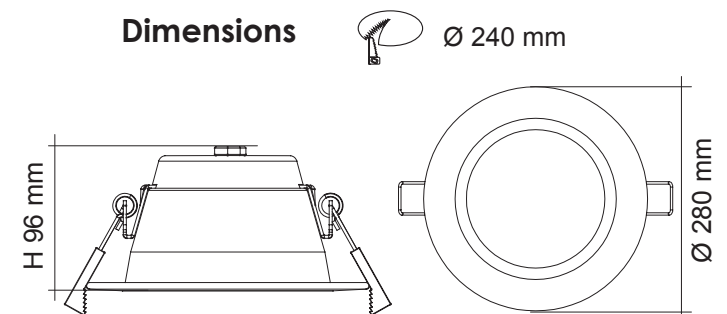

Performance


- Dimmable - Optional
- Dimmer Type, trailing edge, 1-10V, DALI / DSI



Photometric Data

S9076TC/WH/DP at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9076TC/WH/HP	240/50	20	2100/2300/2250	3000/4000/5700	> 90	90°	Optional	White
S9076TC/WH/DP	240/50	30/40	3000/3400/3250/3750/4400/4000	3000/4000/5700	> 90	90°	Optional	White

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

RENMARK S9081D10TC/WH - 10W

10 watt LED downlight with
selectable CCT, IP64

Application


Ideal for any retail or
commercial interior space

Design Specifications

- Premium aluminium body profile
- Stylish white body profile and trim
- Optional white square, black round or black square quick connect trims to order
- High performance mirror optical system, beam distribution 80°
- Remote, premium trailing edge dimmable flickerCONTROLLED LED driver, with flex and plug
- Selectable CCT 3000K / 4000K / 5700K
- IC - 4 rated, double insulated




Dimensions

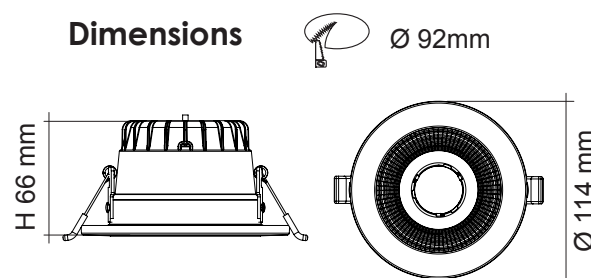

Photometric Data

S9081D10TC/WH at 3000K

Unit: cd C0/C180 C90/C270



Performance

- Dimmable, Trailing edge
- Dimming Options, 1-10V, DALI / DSI



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9081D10TC/WH	240/50	10	1000/1100/1050	3000/4000/5700	> 90	80°	Yes	White
Accessories	S9081RD/BK/P, S9081SQ/BK/P, S9081SQ/WH/P							

For interior products, the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR

RENMARK S9081R10TC/WH - 10W

10 watt LED downlight with
selectable CCT, IP64

Application


Ideal for any retail or
commercial interior space

Design Specifications

- Premium aluminium body profile
- Stylish white body profile and trim
- Optional white square, black round or black square quick connect trims to order
- High performance faceted reflector profile, beam 60° , UGR <19
- Remote, premium trailing edge dimmable flickerCONTROLLED LED driver, with flex and plug
- Selectable CCT 3000K / 4000K / 5700K
- IC - 4 rated, double insulated




Dimensions

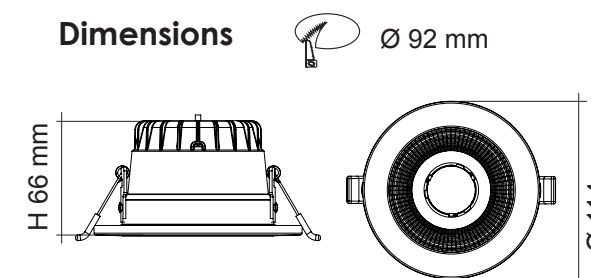

Photometric Data

S9081R10TC/WH at 3000K

Unit: cd C0/C180 C90/C270



Performance

- Dimmable, Trailing edge
- Dimming Options, 1-10V, DALI / DSI



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9081R10TC/WH	240/50	10	850/950/900	3000/4000/5700	> 90	60°	Yes	White
Accessories	S9081RD/BK/P, S9081SQ/BK/P, S9081SQ/WH/P							

For terms of catalogue data use, refer to INDEX



DUAL POWER
TC SELECTABLE COLOUR

RENMARK S9082D20TC/DP - 14W/20W

14/20 watt LED downlight with
selectable CCT and power, IP64



Application


Ideal for any retail or
commercial interior space

Design Specifications

- Premium aluminium body profile
- Stylish white body profile and trim
- Optional white square, black round or black square quick connect trims to order
- High performance mirror optical system, beam distribution 80°
- Remote, premium flickerCONTROLLED LED driver, with flex and plug
- Selectable CCT 3000K / 4000K / 5700K
- IC - 4 rated, double insulated



Dimensions

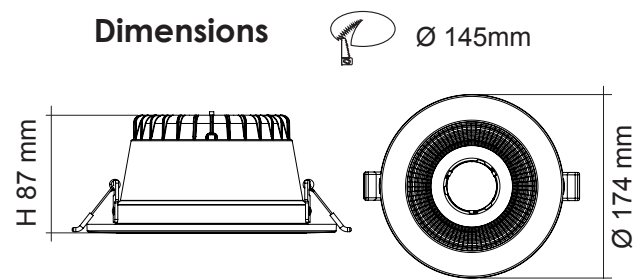

Performance


- Dimming Options, trailing edge 1-10V, DALI / DSI



Photometric Data

S9082D20TC/DP at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9082D20TC/DP	240/50	14/20	1550/1750/1600 2100/2400/2300	3000/4000/5700	> 90	80°	optional	White
Accessories	S9082RD/BK/P, S9082SQ/BK/P, S9082SQ/WH/P							

For interior products, the IP rating stated is from below the ceiling



DUAL POWER
TC SELECTABLE COLOUR

RENMARK S9082R20TC/DP - 14W/20W

14/20 watt LED downlight with
selectable CCT and power, IP64



Application


Ideal for any retail or
commercial interior space

Design Specifications

- Premium aluminium body profile
- Stylish white body profile and trim
- Optional white square, black round or black square quick connect trims to order
- High performance faceted reflector profile, beam 60° , UGR <19
- Remote, premium flickerCONTROLLED LED driver, with flex and plug
- Selectable CCT 3000K / 4000K / 5700K
- IC - 4 rated, double insulated



Dimensions

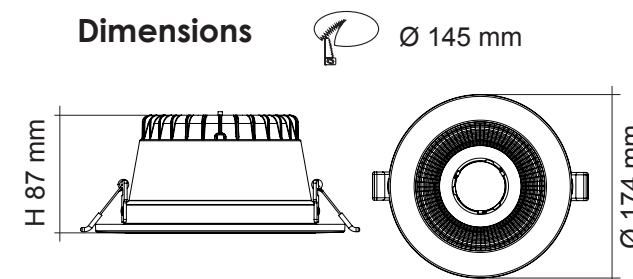

Performance


- Dimming Options, trailing edge 1-10V, DALI / DSI



Photometric Data

S9082R20TC/DP at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9082R20TC/DP	240/50	14/20	1250/1400/1300 1700/1900/1800	3000/4000/5700	> 90	60°	optional	White
Accessories	S9082RD/BK/P, S9082SQ/BK/P, S9082SQ/WH/P							

For terms of catalogue data use, refer to INDEX



DUAL POWER
TC SELECTABLE COLOUR

RENMARK S9083D35TC/DP - 24W/35W

24/35 watt LED downlight with selectable CCT and power, IP64



Application


Ideal for any retail or commercial interior space

Design Specifications

- Premium aluminium body profile
- Stylish white body profile and trim
- Optional white square, black round or black square quick connect trims to order
- High performance mirror optical system, beam distribution 80°
- Remote, premium trailing edge dimmable flickerCONTROLLED LED driver, with flex and plug
- Selectable CCT 3000K / 4000K / 5700K
- IC - 4 rated, double insulated



Dimensions

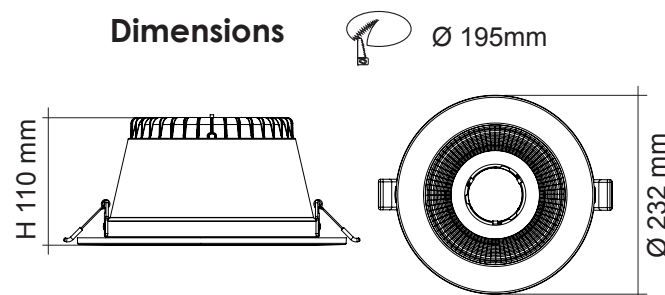

Performance


- Dimming Options, trailing edge 1-10V, DALI / DSI



Photometric Data

S9083D35TC/DP at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9083D35TC/DP	240/50	24/35	2500/2900/2800 3500/4000/3850	3000/4000/5700	> 90	80°	optional	White
Accessories	S9083RD/BK/P, S9083SQ/BK/P, S9083SQ/WH/P							

For interior products, the IP rating stated is from below the ceiling



DUAL POWER
TC SELECTABLE COLOUR

RENMARK S9083R35TC/DP - 24W/35W

24/35 watt LED downlight with selectable CCT and power, IP64



Application


Ideal for any retail or commercial interior space

Design Specifications

- Premium aluminium body profile
- Stylish white body profile and trim
- Optional white square, black round or black square quick connect trims to order
- High performance faceted reflector profile, beam 60° , UGR <19
- Remote, premium trailing edge dimmable flickerCONTROLLED LED driver, with flex and plug
- Selectable CCT 3000K / 4000K / 5700K
- IC - 4 rated, double insulated



Dimensions

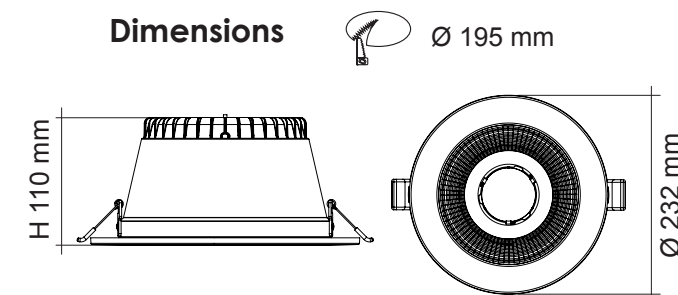

Performance


- Dimming Options, trailing edge 1-10V, DALI / DSI



Photometric Data

S9083R35TC/DP at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9083R35TC/DP	240/50	24/35	2150/2400/2300 3000/3300/3150	3000/4000/5700	> 90	60°	optional	White
Accessories	S9083RD/BK/P, S9083SQ/BK/P, S9083SQ/WH/P							

For terms of catalogue data use, refer to INDEX



DUAL POWER

TC SELECTABLE COLOUR

RENMARK S9084D50TC/DP - 35W/50W

35/50 watt LED downlight with selectable CCT and power, IP64



Application


Ideal for any retail or commercial interior space

Design Specifications

- Premium aluminium body profile
- Stylish white body profile and trim
- Optional white square, black round or black square quick connect trims to order
- High performance mirror optical system, beam distribution 80°
- Remote, premium trailing edge dimmable flickerCONTROLLED LED driver, with flex and plug
- Selectable CCT 3000K / 4000K / 5700K
- IC - 4 rated, double insulated




Dimensions

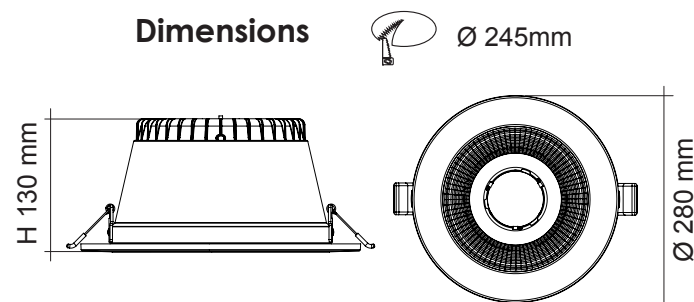

Photometric Data

S9084D50TC/DP at 3000K

Unit: cd C0/C180 C90/C270



Performance

- Dimming Options, trailing edge 1-10V, DALI / DSI



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9084D50TC/DP	240/50	35/50	3150/3650/3500 4500/5250/5000	3000/4000/5700	> 90	80°	optional	White
Accessories	S9084RD/BK/P, S9084SQ/BK/P, S9084SQ/WH/P							

For interior products, the IP rating stated is from below the ceiling



DUAL POWER

TC SELECTABLE COLOUR

RENMARK S9084R50TC/DP - 35W/50W

35/50 watt LED downlight with selectable CCT and power, IP64



Application


Ideal for any retail or commercial interior space

Design Specifications

- Premium aluminium body profile
- Stylish white body profile and trim
- Optional white square, black round or black square quick connect trims to order
- High performance faceted reflector profile, beam 60° , UGR <19
- Remote, premium trailing edge dimmable flickerCONTROLLED LED driver, with flex and plug
- Selectable CCT 3000K / 4000K / 5700K
- IC - 4 rated, double insulated




Dimensions

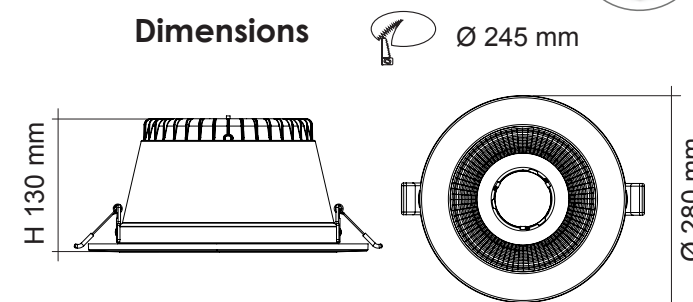

Photometric Data

S9084R50TC/DP at 3000K

Unit: cd C0/C180 C90/C270



Performance

- Dimming Options, trailing edge 1-10V, DALI / DSI



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9084R50TC/DP	240/50	35/50	2800/3150/2950 4000/4500/4250	3000/4000/5700	> 90	60°	optional	White
Accessories	S9084RD/BK/P, S9084SQ/BK/P, S9084SQ/WH/P							

For terms of catalogue data use, refer to INDEX



STAR SPOT II
S9362WW - 3W

Compact design LED
3 watt downlight

Application


Ideal for any residential feature
lighting or commercial interior space

Design Specifications

- 35mm diameter trim face,
low profile design, 30mm cut-out
- Available in Black or White finish
- Durable aluminium body profile
- CCT 3000K, 170 lumens, CRI>80
- High output LED optics,
30° beam distribution
- Designed with a remote, dimmable
driver, complete with flex and plug
- Double insulated




Dimensions

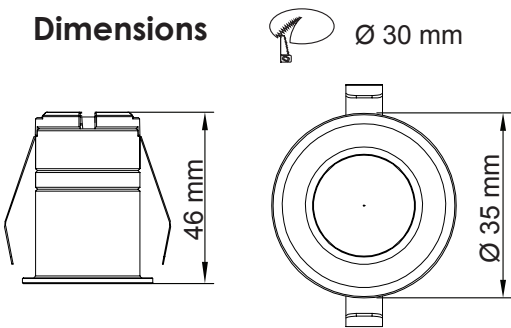

Photometric Data S9362WW at 3000K

Unit: cd C0/C180 C90/C270



Performance

- Dimmable, Trailing edge



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9362WW/WH	240/50	3	170	3000	> 80	30°	Yes	White
S9362WW/BK	240/50	3	170	3000	> 80	30°	Yes	Black

For interior products, the IP rating stated is from below the ceiling



STAR SPOT II
S9363WW - 7W

Compact design LED
7 watt downlight

Application


Ideal for any residential feature
lighting or commercial interior space

Design Specifications

- 55mm diameter trim face,
low profile design, 50mm cut-out
- Available in Black or White finish
- Durable aluminium body profile
- CCT 3000K, 470 lumens, CRI>80
- High output LED optics,
30° beam distribution
- Designed with a remote, dimmable
driver, complete with flex and plug
- Double insulated




Dimensions

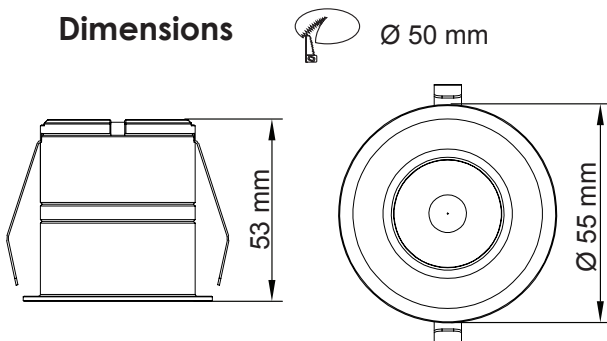

Photometric Data S9363WW at 3000K

Unit: cd C0/C180 C90/C270



Performance

- Dimmable, Trailing edge



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9363WW/WH	240/50	7	470	3000	> 80	30°	Yes	White
S9363WW/BK	240/50	7	470	3000	> 80	30°	Yes	Black

For terms of catalogue data use, refer to INDEX



**SURFACE MOUNT CAN 92
S9063SMC/WH**

Surface mount can designed for SAL Ecogem, Wave, Tradegem, Renmark, & Ecostar downlights with a 92mm cut-out

Application

Ideal for any residential or commercial interior space

Design Specifications

- Stylish white (RAL9016) UV resistant powder coat finish, IP20
- Easy installation design, robust steel construction
- Designed to suit SAL 92mm cut-out downlights - Ecogem, Wave Tradegem, Renmark or Ecostar
- SAL compatible product codes ordered separately - S9041TC/WH, S9041TC2WH, S9041TC2WH/FG, S9141TC2WH, S9048TC/WH, S9065TC/WH, S9065TC/WH/FG, S9065TC/MS, S9065TC/MP/S, S9071TC/WH, S9081D10TC, S9081R10TC, S9086C5MP, SEL10SF3DIP65




Technical Specifications

Model No.	Material	Fitting Colour	Dimensions (D x H mm)
S9063SMC/WH	RAL9016	Matt White	Ø 152 x 120



Dimensions

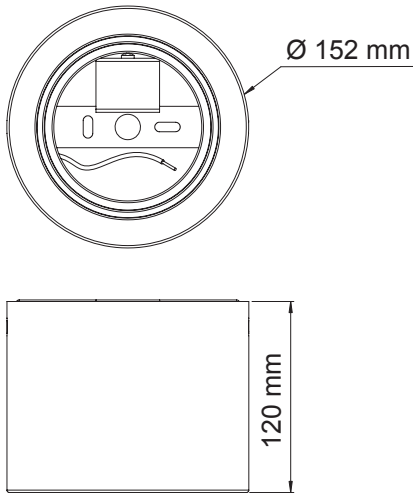

For interior products, the IP rating stated is from below the ceiling



**SURFACE MOUNT CAN 145
S9073SMC**

Surface mount can designed for SAL S9073 / Premier and S9082 / Renmark downlights with a 135/145mm cut-out

**SURFACE MOUNT CAN 195
S9075SMC**

Surface mount can designed for SAL S9075 / Premier and S9083 / Renmark downlights with a 195mm cut-out

Application

Ideal for any residential or commercial interior space

Design Specifications

- Stylish white or black UV resistant powder coat finish, IP20
- Easy installation design, robust steel construction
- CAN145 SAL compatible product codes ordered separately S9073TC/WH/DP, S9073TC/SL/DP, S9082R20TC/DP, S9082D20TC/DP, S9082R20TC/DP, S9082D20TC/DP (S9073SMC)
- CAN195 SAL compatible product codes ordered separately S9075TC/WH/DP, S9075TC/SL/DP, S9083R35TC/DP, S9083D35TC/DP, S9083R35TC/DP, S9083D35TC/DP (S9075SMC)




Technical Specifications

Model No.	Material	Fitting Colour	Dimensions (D x H mm)
S9073SMC/WH	RAL9016	Matt White	Ø 182 x 155
S9073SMC/BK	RAL9016	Black	Ø 182 x 155
S9075SMC/WH	RAL9016	Matt White	Ø 240 x 180
S9075SMC/BK	RAL9016	Black	Ø 240 x 180

For terms of catalogue data use, refer to INDEX



Dimensions

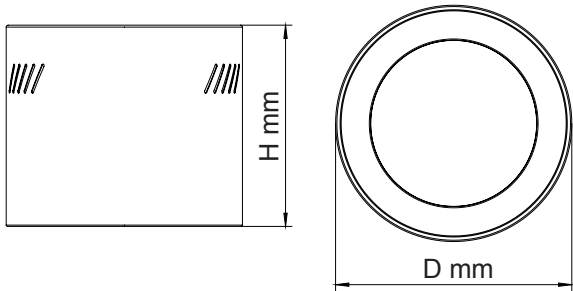



DUAL POWER

TC SELECTABLE COLOUR

SURFACE SPOT SMT9017TC - 10/15W

Dimmable 10/15 watt LED downlight with selectable CCT and power.

Application


Ideal for any residential feature lighting or commercial interior space

Design Specifications

- Selectable CCT 3000K / 4000K / 5700K
- Durable Polyamide body profile
- Surface mount
- Integral, dimmable control gear with selectable power
- Choice of Black or White finish
- 40° beam distribution, optional 60°, CRI>80
- Double insulated




Dimensions



Photometric Data

SMT9017TC at 4000K

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270



Performance

- Dimmable, Trailing edge



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
SMT9017TC/WH	240/50	10 15	580/700/630 1000/1150/1100	3000/4000/5700	> 80	40°	Yes	White
SMT9017TC/BK	240/50	10 15	580/700/630 1000/1150/1100	3000/4000/5700	> 80	40°	Yes	Black

For interior products, the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR

TRADEGEM S9140TC2WH - 8W

Dimmable 8 watt LED downlight with selectable CCT, IP44

Application

Ideal for any residential or commercial interior space


Design Specifications

- Selectable CCT 3000K/4000K/5700K
- Durable Polyamide, reinforced aluminium body profile, IC-4 rated
- Stylish white powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency LED optics
- Trailing edge dimmable LED driver, with flex and plug
- Deco ring options - Satin Nickel (S9140SN/RING)
- Double insulated



Dimensions


Ø 72 mm

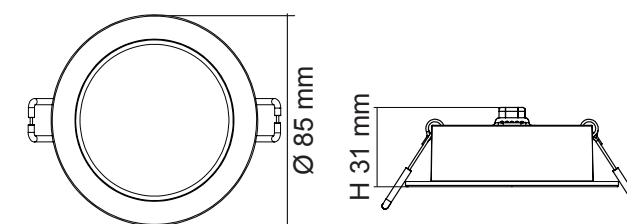

Photometric Data

S9140TC2WH at 3000K

Unit: cd C0/C180 C90/C270



Performance

- Dimmable, Trailing edge



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9140TC2WH	240/50	8	650/700/700	3000/4000/5700	> 90	90°	Yes	White

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

TRADEGEM SURFACE MOUNT S9141TC SM - 9W

Dimmable 9 watt surface mount LED
downlight with selectable CCT, IP20, CRI>90

Application

Ideal for any surface mount, residential
or commercial interior space

Design Specifications


- Selectable CCT 3000K/4000K/5700K
- Durable aluminium surface mount
body profile, IP20
- Stylish white or black powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency LED optics
- Integral, trailing edge dimmable
LED driver



S9141TC/WH/SM

S9141TC/BK/SM


Dimensions



Photometric Data

S9141TC SM at 3000K

Unit: cd C0/C180 C90/C270



Performance

- Dimmable, Trailing edge



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9141TC/WH/SM	240/50	9	700/850/800	3000/4000/5700	> 90	90°	Yes	White
S9141TC/BK/SM	240/50	9	700/850/800	3000/4000/5700	> 90	90°	Yes	Black

For interior products, the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR

TRADEGEM S9141TC2WH - 9W

Dimmable 9 watt LED downlight
with selectable CCT, IP44

Application

Ideal for any residential or
commercial interior space


Design Specifications

- Selectable CCT 3000K/4000K/5700K
- Durable Polyamide, aluminium
reinforced body profile, IC-4 rated
- Stylish white finish
- Quality opal polycarbonate diffuser
- High efficiency LED optics
- Trailing edge dimmable LED driver
with flex and plug
- Colour trim options:
Satin Nickel (S9141SN/RING), Black
(S9141BK/RING)
- Double insulated



Dimensions


Ø 92 mm

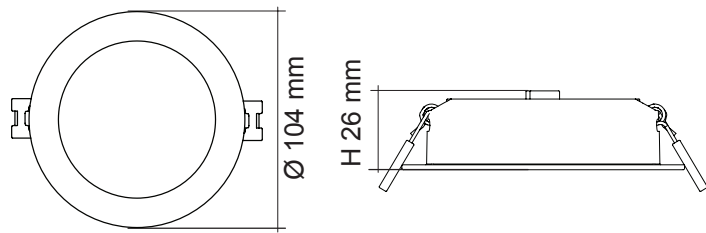

Photometric Data

S9141TC2WH at 3000K

Unit: cd C0/C180 C90/C270



Performance

- Dimmable, Trailing edge



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9141TC2WH	240/50	9	900/1050/1000	3000/4000/5700	> 90	110°	Yes	White

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

UNIFIT S9008TC2 - 10W

Dimmable fixed 10 watt LED
downlight, with selectable CCT

Application


Ideal for any residential or
commercial interior space



Design Specifications


- Durable die-cast aluminium body profile
- Stylish white or black powder coat finish
- High output LED optics
- Multi-faceted reflector system,
60° beam distribution.
- Polycarbonate optical lens
- Remote, trailing edge dimmable LED
driver with flex and plug
- Double insulated

Dimensions

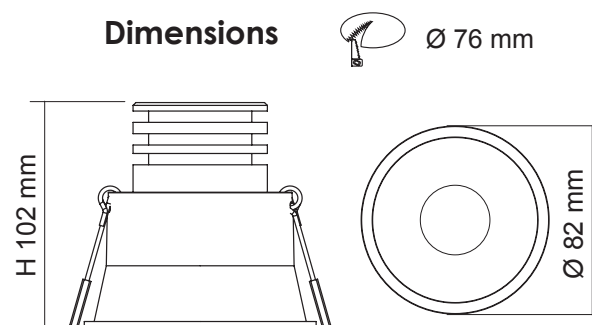

Performance


- Dimmable, Trailing edge
- Dimming Options, 1-10V, DALI / DSI

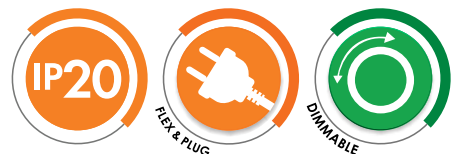

Photometric Data

S9008TC2 at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9008TC2WH	240/50	10	750/900/850	3000/4000/6000	> 80	60°	Yes	Matt White
S9008TC2BK	240/50	10	750/900/850	3000/4000/6000	> 80	60°	Yes	Black

For interior products, the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR

UNIFIT S9009TC2 - 10W

Centre tilt 23° dimmable 10 watt
LED downlight, with selectable CCT

Application


Ideal for any residential or
commercial interior space



Design Specifications


- Durable die-cast aluminium body profile
- Stylish white or black powder coat finish
- High output LED optics
- Multi-faceted reflector system,
60° beam distribution.
- Polycarbonate optical lens
- Remote, trailing edge dimmable LED
driver with flex and plug
- Double insulated

Dimensions

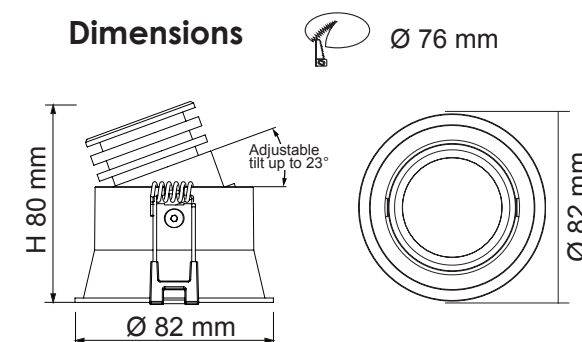

Performance


- Dimmable, Trailing edge
- Dimming Options, 1-10V, DALI / DSI

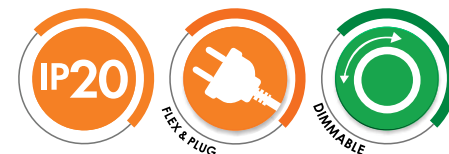

Photometric Data

S9009TC2 at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9009TC2WH	240/50	10	750/900/850	3000/4000/6000	> 80	60°	Yes	Matt White
S9009TC2BK	240/50	10	750/900/850	3000/4000/6000	> 80	60°	Yes	Black

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

UNIFIT S9011TC2 - 10W

Fixed dimmable 10 watt LED
downlight, with selectable CCT


Application

Ideal for any residential or
commercial interior space

Design Specifications


- Durable die-cast aluminium body profile
- Stylish white or black powder coat finish
- High output LED optics, polycarbonate lens, 60° beam distribution
- Remote, trailing edge dimmable LED driver with flex and plug
- Double insulated

Dimensions

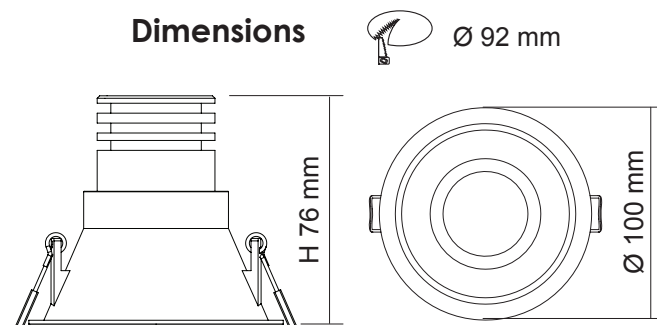

Performance


- Dimmable, Trailing edge
- Dimming Options, 1-10V, DALI / DSI

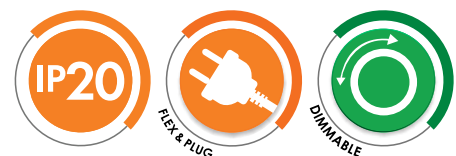

Photometric Data

S9011TC2 at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9011TC2WH	240/50	10	750/900/850	3000/4000/6000	> 80	60°	Yes	Matt White
S9011TC2BK	240/50	10	750/900/850	3000/4000/6000	> 80	60°	Yes	Black

For interior products, the IP rating stated is from below the ceiling

SAL

Coolum Plus

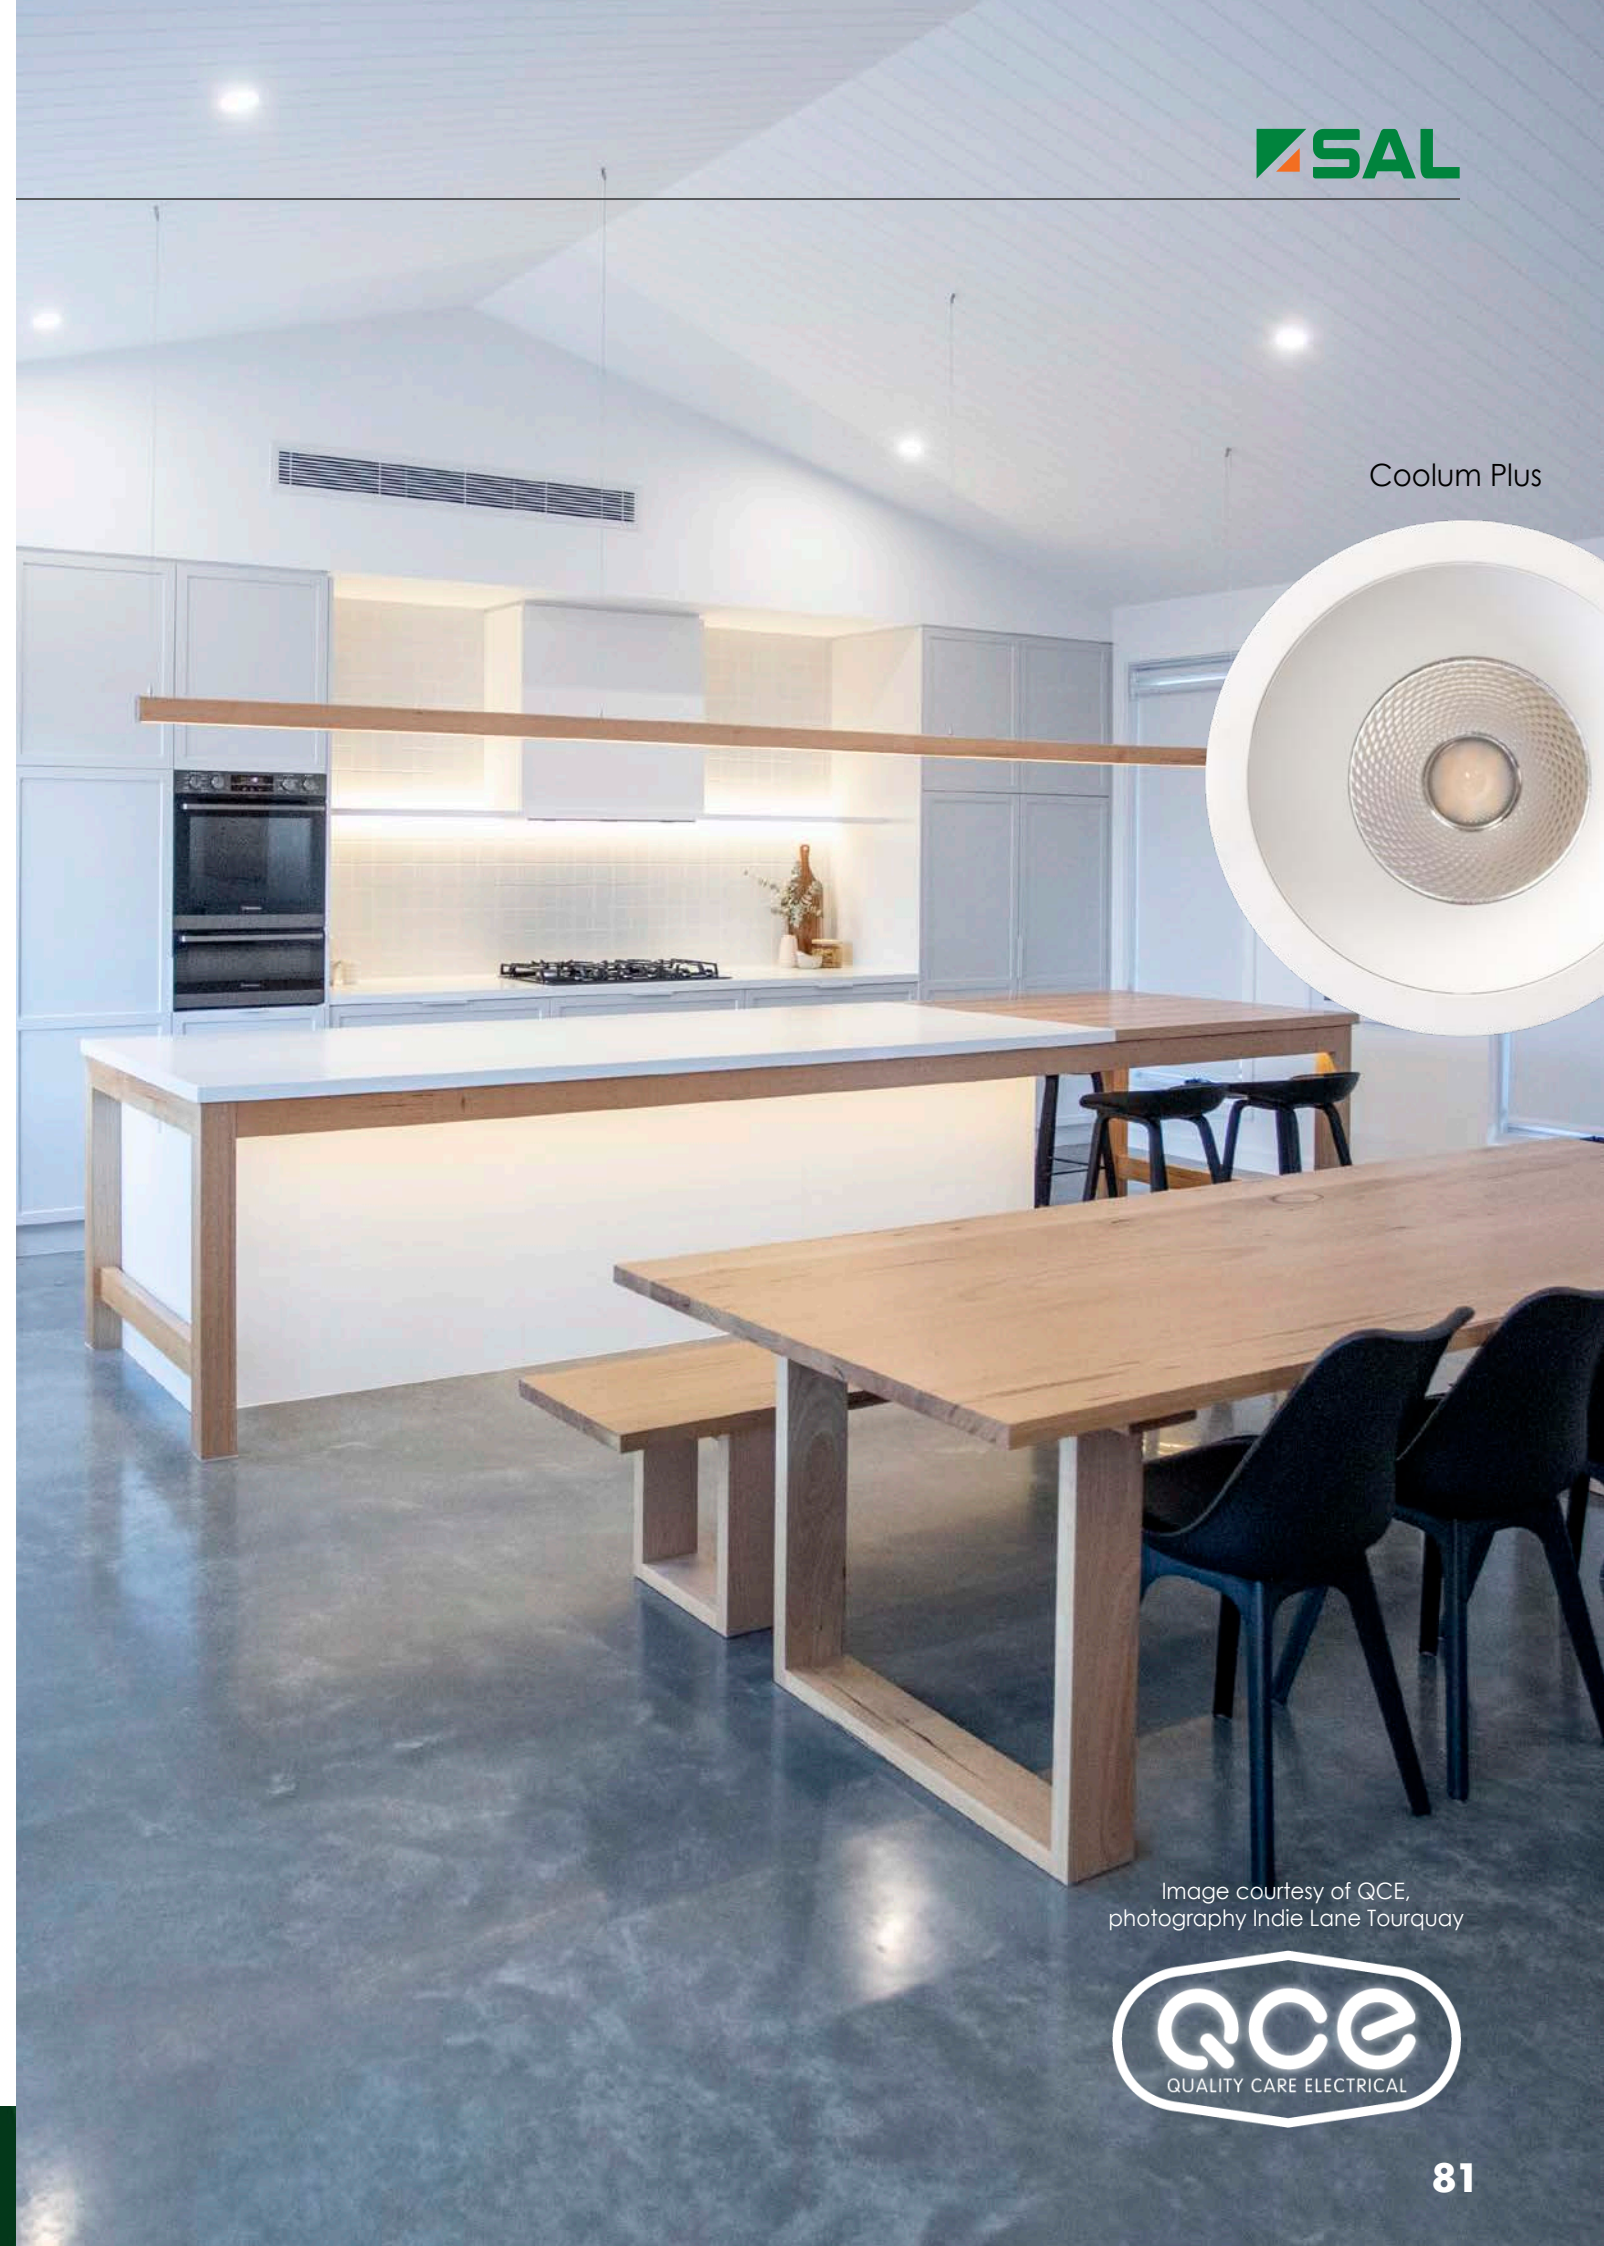


Image courtesy of QCE,
photography Indie Lane Tourquay





TC SELECTABLE COLOUR

UNIFIT
S9053TCP2 - 10W

Dimmable 10 watt LED module,
with selectable CCT

Application


Ideal for any residential or
commercial interior space

Design Specifications


- Efficient die-cast aluminium heat sink
- High output LED optics
- Multi-faceted reflector system,
60° beam distribution
- Polycarbonate optical lens
- Remote, trailing edge dimmable LED
driver, fitted with flex and plug
- A comprehensive range of downlight
trims are available, see MIX & MATCH
model numbers
- Double insulated

Performance

- Dimmable, Trailing edge
- Dimming Options, 1-10V, DALI / DSI

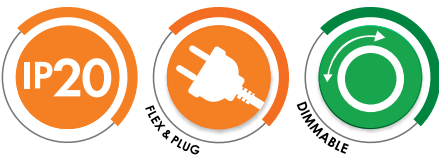


Dimensions

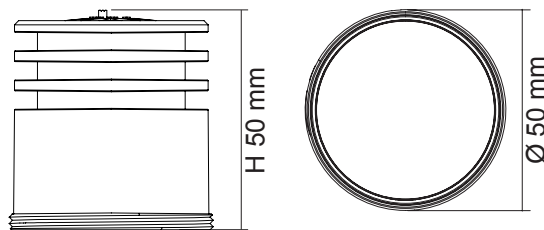

Photometric Data S9053TCP2 at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable
S9053TCP2	240/50	10	750/900/850	3000/4000/6000	> 80	60°	Yes

For interior products, the IP rating stated is from below the ceiling



MIX AND MATCH THE TRIM PROFILES



For terms of catalogue data use, refer to INDEX



UNIFIT COMPACT S9054TC/GY - 8W

Dimmable 8 watt integral LED module, with selectable CCT

Application


Ideal for any residential or commercial interior space

Design Specifications

- Polyamide coated aluminium body profile
- High output 8 watt LED optics, CRI >80
- Prismatic visor, 60° beam distribution
- Selectable CCT 3000/4000/5700K
- Integral flickerCONTROLLED dimmable control gear with plug and play flex and plug, double insulated
- Downlight trim ordered separately, Ø 50mm trim face




Dimensions

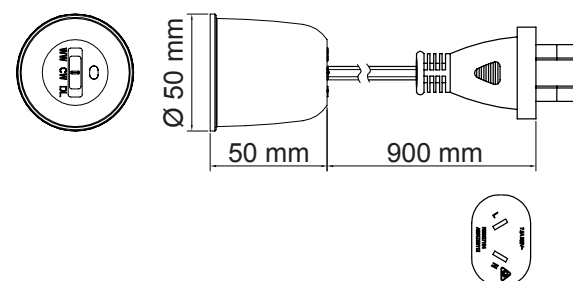

Photometric Data


S9054TC/GY at 3000K

Unit: cd C0/C180 C90/C270



Performance

- Dimmable, Trailing edge

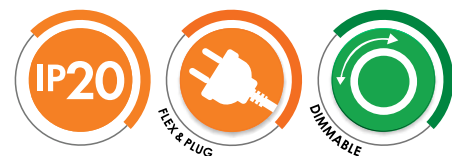

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable
S9054TC/GY	240/50	8	680/720/680	3000/4000/5700	> 80	60°	Yes

For interior products, the IP rating stated is from below the ceiling



UNITREK RECESSED MOUNT SRC9017TC - 10/15W

Dimmable, 10/15 watt LED downlight with selectable CCT and power.

Application


Ideal for any residential feature lighting or commercial interior space

Design Specifications

- Selectable CCT 3000K / 4000K / 5700K
- Durable Polyamide body profile
- Recessed mount, cut-out 72mm
- Integral, dimmable control gear, selectable power with flex and plug
- Choice of Black or White finish
- CRI>80, standard 40° beam distribution, optional 60°
- Double insulated




Dimensions

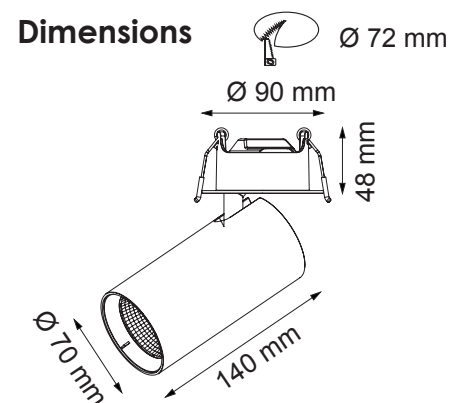

Photometric Data


SRC9017TC at 3000K

Unit: cd C0/C180 C90/C270



Performance

- Dimmable, Trailing edge

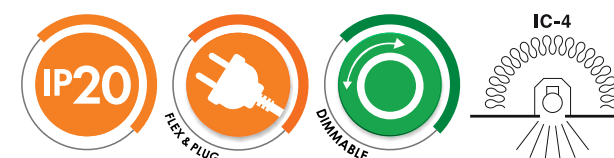

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
SRC9017TC/WH	240/50	10/15	580/700/630 1000/1150/1100	3000/4000/5700	> 80	40°	Yes	White
STC9017TC/BK	240/50	10/15	580/700/630 1000/1150/1100	3000/4000/5700	> 80	40°	Yes	Black

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

WAVE S9064TC WH - 7W

Dimmable LED downlight with selectable CCT, IP44

Application


Ideal for any residential or commercial interior space

Design Specifications

- Selectable CCT 3000K / 4000K / 5700K
- Poly covered aluminium body
- Quality opal polycarbonate diffuser
- Integral, trailing edge dimmable LED driver, with flex and plug
- High efficiency LED optics
- Deco ring options: Satin Nickel (S9064SN/RING), Black (S9064BK/RING)
- IC - 4 rated, double insulated



Dimensions

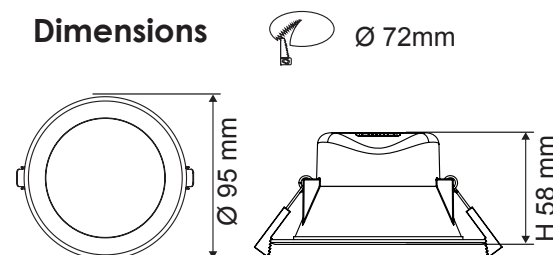

Performance


- Dimmable, trailing edge



Photometric Data

S9064TC WH at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9064TC WH	240/50	7	750/850/800	3000/4000/5700	> 80	90°	Yes	White

For interior products, the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR

WAVE S9065TC WH - 9W

Dimmable LED downlight, CRI90 with selectable CCT and flickerCONTROLLED technology, IP44

Application


Ideal for any residential or commercial interior space

Design Specifications

- Selectable CCT 3000K/4000K/5700K, CRI90
- Poly covered aluminium body, quality opal polycarbonate diffuser
- Integral flickerCONTROLLED trailing edge dimmable LED driver, with flex and plug
- High efficiency LED optics
- Deco ring options: Satin Nickel (S9065SN/RING), Black (S9065BK/RING)
- IC - 4 rated, double insulated



Dimensions

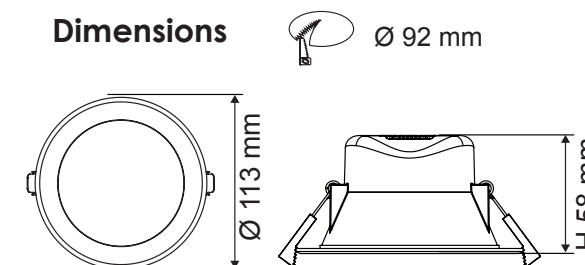

Performance


- Dimmable, trailing edge



Photometric Data

S9065TC WH at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9065TC WH	240/50	9	750/850/800	3000/4000/5700	> 90	90°	Yes	White

For terms of catalogue data use, refer to INDEX



WAVE FLICKERGUARD S9065TC/WH/FG - 8W

Dimmable 8 wattLED downlight with selectable CCT and flickerGUARD

Application


Ideal for any residential or commercial interior space, experiencing nuisance harmonic induced flicker

Design Specifications

- The innovative flickerGUARD Wave responds to both visual and non-visual harmonic induced flicker.
- Selectable CCT 3000K / 4000K / 5700K
- Integral flickerGUARD trailing edge dimmable LED driver, with smooth dimming performance, designed with flex and plug for easy installation.
- Poly covered aluminium body,
- Deco ring options: Satin Nickel (S9065SN/RING), Black (S9065BK/RING)
- IC - 4 rated, double insulated




Dimensions

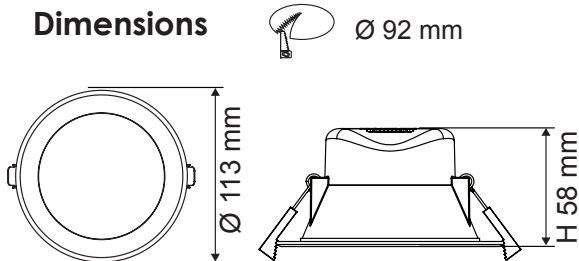

Photometric Data

S9065TC/WH/FG at 3000K

Unit: cd C0/C180 C90/C270



Performance

- Dimmable, trailing edge



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9065TC/WH/FG	240/50	8	800/950/850	3000/4000/5700	> 90	90°	Yes	White

For interior products, the IP rating stated is from below the ceiling



WAVE SENSOR S9065TC/MP/S - 9W

Recessed 9 watt LED downlight with microwave sensor control and selectable CCT, IP44

Application


Ideal for any residential or strata common area interior spaces

Design Specifications

- Selectable power, CCT 3000K/4000K/5700K and integral microwave sensor
- Poly covered aluminium body
- Opal polycarbonate diffuser, IP44
- Integral multi-power (3/6/9 watt) flickerCONTROLLED non-dimmable LED driver, with flex and plug
- Microwave sensor adjustments - 5sec/90sec/5min/30min, daylight threshold 30lux, detection distances Ø 8M @ 2.4hm, manual override function
- Deco ring options - Satin Nickel (S9065SN/RING), Black (S9065BK/RING)
- IC - 4 rated, double insulated




Dimensions

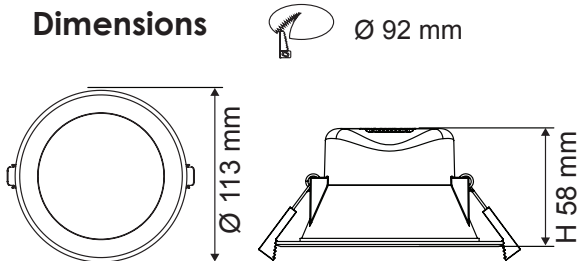

Photometric Data

S9065TC/MP/S at 3000K

Unit: cd C0/C180 C90/C270



Performance

- Non-dimmable
- Sensor Type - MICROWAVE



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9065TC/MP/S	240/50	9	700/850/800	3000/4000/5700	> 90	120°	No	White

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

WAVE S9066TC - 12W

Dimmable IP44 LED downlight
with selectable CCT

Application


Ideal for any residential or
commercial interior space

Design Specifications

- Selectable CCT 3000K/4000K/5700K
- Poly covered aluminium body,
IC - 4 rated, double insulated
- Opal polycarbonate diffuser
- Integral, trailing edge dimmable LED
driver, with flex and plug
- High efficiency LED optics
- Deco ring options:
Satin Nickel (S9066SN/RING),
Black (S9066BK/RING)




Dimensions

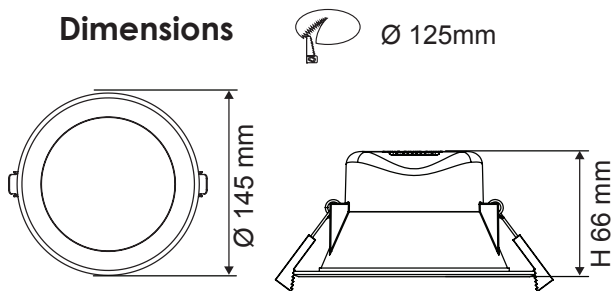

Photometric Data


S9066TC at 3000K

Unit: cd C0/C180 C90/C270



Performance

- Dimmable, trailing edge

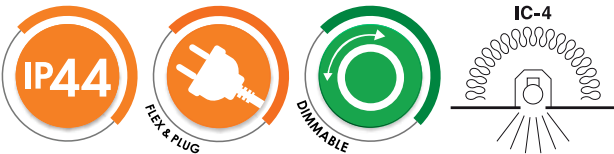

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9066TC WH	240/50	12	1300/1450/1350	3000/4000/5700	> 80	90°	Yes	White

For interior products, the IP rating stated is from below the ceiling



WAVE - S9066TC





SELV LED DOWNLIGHT KITS S9001, S9003

Low voltage LED downlight kits (Round)

Select your downlight in three easy steps

Step 1 - Select your downlight head profile

Technical Specifications

Model No.	Head	Fitting Colour	Cut Out (Ø)	Dimensions (Ø)
S9001BK	Fixed head, twist lock	Black	72mm	81mm
S9001WH	Fixed head, twist lock	White	72mm	81mm
S9001SC	Fixed head, twist lock	Satin Chrome	72mm	81mm
S9003BK	Gimbal 45°, twist lock	Black	92mm	103mm
S9003WH	Gimbal 45°, twist lock	White	92mm	103mm
S9003SC	Gimbal 45°, twist lock	Satin Chrome	92mm	103mm



Step 2 - Select your driver type

Electronic transformers (please select one for MR16 lamps)

Model No.	Input (V)/(Hz)	Power (W)	Output (V)	Power Factor	Dimensions (L x W x H mm)	1.2 m flex & 2 pin plug fitted
MINI60	240/50	20-60	11.5	0.99	109 x 42 x 24	No
MINI/P60	240/50	20-60	11.5	0.99	109 x 42 x 24	Yes

OR

Dimmable LED modules (please select one)

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable
S9053TC2P	240/50	10	750/900/850	3000/4000/6000	> 80	60°	Yes
S9053HC/WP	240/50	8	620	3000	> 90	60°	Yes
S9053WW/RS	240/50	9	700	3000	> 80	60°	Yes

For interior products, the IP rating stated is from below the ceiling



Step 3 - Select your lamp type and you are ready to go!



MR16/5W/TC

MR16/7W/TC

MR16DIM9

ACCESSORY S9000LH



MR16CC7KIT/WW

S9053TCP2

S9053WP/RS

S9053HC/WP

Low voltage LED globes (please select one)

Model No.	Input (AC/DC)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Dimmable	Lamp Base	Dimensions (D x H mm)
MR16/5W/TC	12 V	4	360/400/380	3000/4000/6000	38°	No	GU5.3	50 x 55
MR16/7W/TC	12 V	6	500/600/380	3000/4000/6000	38°	No	GU5.3	50 x 55
MR16DIM9WW	12 V	9	550	3000	60°	Yes	GU5.3	50 x 49
MR16DIM9CW	12 V	9	550	4000	60°	Yes	GU5.3	50 x 49
MR16DIM9DL	12 V	9	550	6000	60°	Yes	GU5.3	50 x 49

For terms of catalogue data use, refer to INDEX




ADAPTOR PLATES S9901, S9903, S9931, S9933

Interior downlight adaptor plates

Design Specifications

- Pressed steel plate, black, satin nickel, matt white, or gloss white powder coat finish

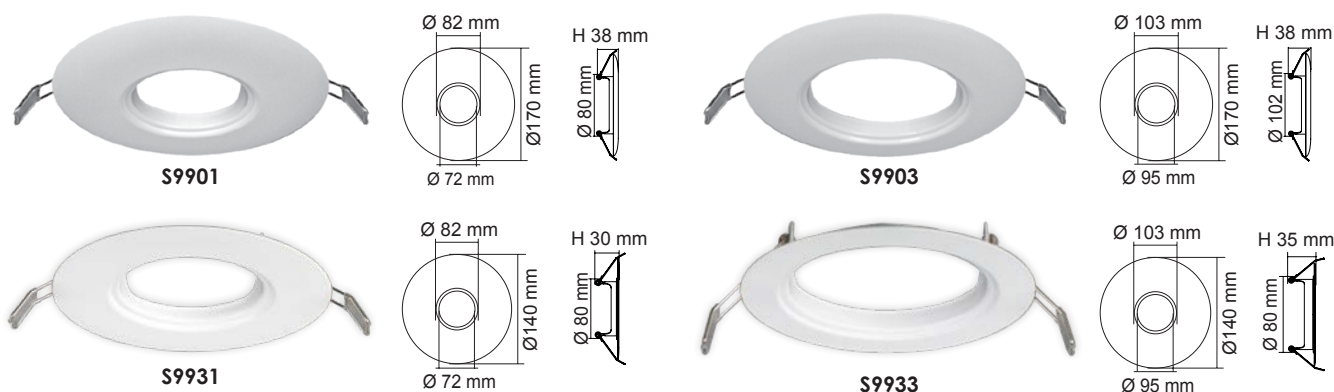

Technical Specifications


Model No.	Internal (D mm)	Overall (D mm)	Colour	Suits
S9901BK	72	170	Black	S9001BK
S9903BK	95	170	Black	S9003BK
S9903WH	95	170	Matt White	S9146WH, S9048WH, S9141WH, S9842WH
S9903GWH	95	170	Gloss White	S9041WH, S9046WH
S9931WH	72	140	Matt White	S9145WH
S9933WH	95	140	Matt White	S9146WH, S9048WH, S9141WH, S9842WH

REDUCER RINGS S9922, S9923

Interior downlight adaptor plates

Design Specifications

- Adaptor plate, gloss white powder coat finish

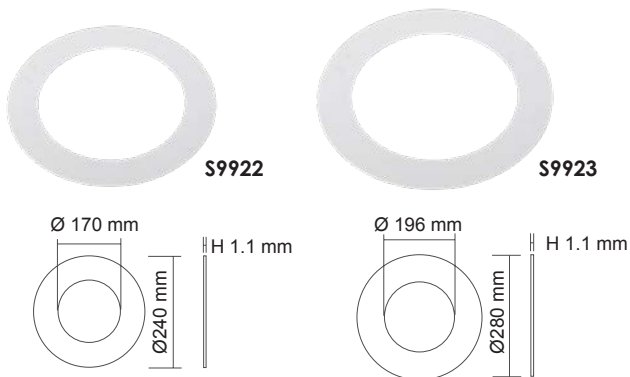

Technical Specifications

Model No.	Internal (D mm)	Overall (D mm)	Colour	Suits
S9922	170	240	White	S9522, S9074, S9545, S9656
S9923	196	280	White	S9523, S9075

For interior products, the IP rating stated is from below the ceiling



Image courtesy of QCE,
photography Indie Lane Tourquay



SMARTER LIGHTING CHOICES



🏠 SAL National Pty Ltd - 40 Biloela St, Villawood NSW 2163

☎ + 61 2 9723 3099

🌐 www.sal.net.au

✉ info@sal.net.au

🏠 VICT/TAS - 46/48 Keys Road Moorabbin VIC 3189

☎ + 61 3 9532 3168

✉ info@sal.net.au

🏠 QLD - 36 Whitelaw Place Richlands QLD 4077

☎ + 61 7 3879 5999

✉ info@sal.net.au

🏠 SA/NT - 79 Frederick St, Welland SA 5009

☎ +61 8 7084 1958

✉ info@sal.net.au

🏠 WA - 29 Beringarra Avenue Malaga WA 6090

☎ +61 8 9248 7458

✉ info@sal.net.au



2026/28