

SMARTER LIGHTING CHOICES



SAL Lighting a Smarter Future  



2026/28





An extensive range of LED Batten and LED interior Linear Profiles, with a wide selection of colours and installation choices.



TC SELECTABLE COLOUR

BLADE SL9707 TC - 20W/35W

LED low profile batten, with selectable CCT.

Application

Conventional LED low profile battens for commercial spaces

Design Specifications

- Selectable CCT 3000K / 4000K / 5700K
- Extruded aluminium body profile with a rear cable channel for easy wiring access
- White powder coat finish
- Integral constant current non-dimmable LED driver, 20 or 30 or 35 watt
- Robust opal polycarbonate diffuser
- High efficiency LED optics, CRI >80, 120° beam distribution


Performance

- Non-dimmable



Photometric Data

Unit: cd C0/C180 C90/C270

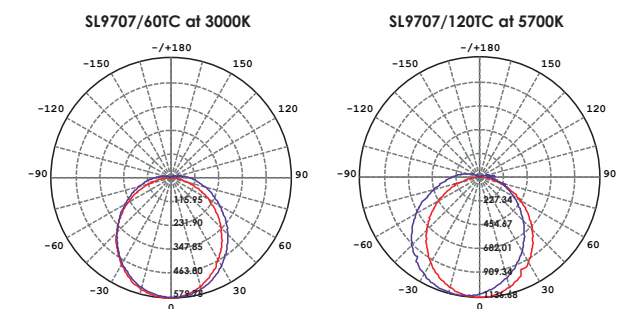

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimension L x W x H (mm)
SL9707/60TC	240/50	20	2500/2700/2600	3000/4000/5700	120°	White	597 x 80 x 35
SL9707/120TC	240/50	30	3800/4100/4000	3000/4000/5700	120°	White	1197 x 80 x 35
SL9707/150TC	240/50	35	4500/4800/4700	3000/4000/5700	120°	White	1485 x 80 x 35

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

BLADE SL9709 TC - 25W/50W

LED low profile batten with selectable CCT

Application

Conventional LED low profile battens for commercial spaces

Design Specifications

- Selectable CCT 3000K/4000K/5700K
- Extruded aluminium body profile with a rear cable channel for easy wiring access
- White powder coat finish
- Integral constant current non-dimmable LED driver, 25 or 45 or 50 watt
- Robust opal polycarbonate diffuser
- High efficiency LED optics, CRI >80, 120° beam distribution

Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimension L x W x H (mm)
SL9709/60TC	240/50	25	3200/3400/3300	3000/4000/5700	120°	White	613 x 120 x 35
SL9709/120TC	240/50	45	5900/6300/6000	3000/4000/5700	120°	White	1213 x 120 x 35
SL9709/150TC	240/50	50	6500/6900/6700	3000/4000/5700	120°	White	1485 x 120 x 35

For interior products, the IP rating stated is from below the ceiling



DUAL POWER

TC SELECTABLE COLOUR

ECOLINE EXTRA SL9737 TC/DP - 10W/50W

LED WIDE (90mm) diffused batten with selectable CCT, dual power with emergency and sensor options

Application

Wide 90mm conventional style linear LED batten design for commercial spaces

Design Specifications

- White powder coat finish with a robust opal polycarbonate diffuser
- Selectable power
- Large terminal block for easier installation
- Selectable CCT 3000K/4000K/5700K
- High efficiency LED optics, CRI >80, 120° beam distribution
- Optional sensor, dimming and emergency configurations

Performance

- Dimmable - optional, trailing edge, 1-10V, DALI



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimension L x W x H (mm)
SL9737/20TC/DP	240/50	10/20	1350/1400/1350 2400/2600/2400	3000/4000/5700	100°	White	610 x 90 x 66
SL9737/40TC/DP	240/50	20/40	2550/2750/2750 4550/5200/4950	3000/4000/5700	100°	White	1225 x 90 x 66
SL9737/50TC/DP	240/50	25/50	3000/3250/3200 5600/6450/5950	3000/4000/5700	100°	White	1519 x 90 x 66

For terms of catalogue data use, refer to INDEX

SL9737/20TC/DP



SL9737/40TC/DP




SL9737/50TC/DP



Photometric Data

Unit: cd C0/C180 C90/C270

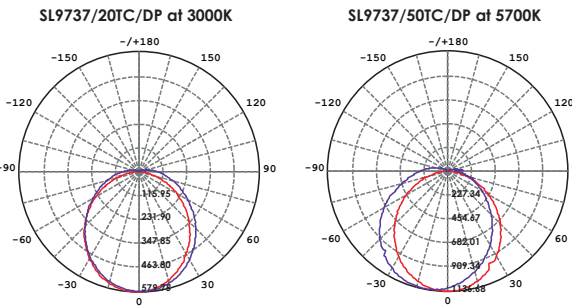



DUAL POWER

TC SELECTABLE COLOUR



ECOLINE III SL9732 TC/DP3 - 10W/50W

LED narrow diffused batten with selectable CCT and Dual Power

Application

Conventional linear LED batten products for commercial services

Design Specifications

- 65 mm narrow steel body
- White powder coat finish with a robust polycarbonate diffuser
- Large terminal block, easy installation
- Selectable CCT 3000K/4000K/5700K
- High efficiency LED optics, CRI >80, 120° beam distribution
- Integral flickerCONTROLLED LED driver with selectable power
- Emergency options available
- Non-dimmable corridorSTANDBY options available

Performance

- Dimmable - Optional, refer model No.
- Dimmer Type, Trailing edge, DALI
- Optional sensor ON/OFF, refer model No. (DP3S)
- Optional corridorSTANDBY sensor



SL9732/20TC



SL9732/40TC




SL9732/50TC



Photometric Data

Unit: cd C0/C180 C90/C270

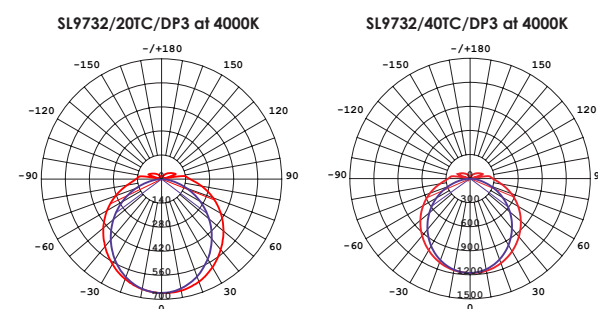

For interior products, the IP rating stated is from below the ceiling



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Dimmable	CRI	Dimensions (L x W x H mm)
SL9732/20TC/C	240/50	20	2370/2600/2440	3000/4000/5700	No	> 80	600 x 65 x 65
SL9732/20TC/DP3	240/50	10 20	1400/1490/1460 2370/2600/2440	3000/4000/5700	No	> 80	600 x 65 x 65
SL9732/20TC/DP3S	240/50	10 20	1400/1490/1460 2370/2600/2440	3000/4000/5700	No	> 80	600 x 65 x 65
SL9732/20TC3DIM	240/50	20	2200/2400/2350	3000/4000/5700	Yes	> 80	600 x 65 x 65
SL9732/40TC/C	240/50	40	4200/5100/4860	3000/4000/5700	No	> 80	1135 x 65 x 65
SL9732/40TC/DP3	240/50	20 40	2670/2800/2790 4200/5100/4860	3000/4000/5700	No	> 80	1135 x 65 x 65
SL9732/40TC/DP3S	240/50	20 40	2670/2800/2790 4200/5100/4860	3000/4000/5700	No	> 80	1135 x 65 x 65
SL9732/40TC3DIM	240/50	40	4650/4900/4750	3000/4000/5700	Yes	> 80	1135 x 65 x 65
SL9732/50TC/C	240/50	50	6100/6700/6200	3000/4000/5700	No	> 80	1455 x 65 x 65
SL9732/50TC/DP3	240/50	25 50	3280/3500/3460 6100/6700/6200	3000/4000/5700	No	> 80	1455 x 65 x 65
SL9732/50TC/DP3S	240/50	25 50	3280/3500/3460 6100/6700/6200	3000/4000/5700	No	> 80	1455 x 65 x 65
SL9732/50TC3DIM	240/50	50	6050/6650/6500	3000/4000/5700	Yes	> 80	1455 x 65 x 65

For terms of catalogue data use, refer to INDEX



DUAL POWER

TC SELECTABLE COLOUR

ECOLINE SUPER WIDE SL9739 TC/DP - 10W/50W

LED super wide 160mm body diffused batten
with selectable CCT and Dual Power

Application

Super wide 160mm linear LED batten for
commercial spaces

Design Specifications

- 160mm super wide steel body
- White powder coat finish with PC diffuser
- Large terminal block, easy installation
- Selectable CCT 3000K/4000K/5700K
- High efficiency LED, CRI >80,
120° beam distribution
- Integral flickerCONTROLLED non-dimmable
LED driver with selectable power
- Emergency options available,
non-dimmable corridorSTANDBY options

Performance

- In Built Sensor - OPTIONAL
- Sensor Type - MICROWAVE



Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimension L x W x H (mm)
SL9739/20TC/DP	240/50	10 20	1250/1300/1260 2300/2450/2200	3000/4000/5700	120°	White	610 x 160 x 82
SL9739/40TC/DP	240/50	20 40	2400/2500/2400 4550/4850/4350	3000/4000/5700	120°	White	1225 x 160 x 82
SL9739/50TC/DP	240/50	25 50	2900/3000/2850 5550/5950/5350	3000/4000/5700	120°	White	1519 x 160 x 82

For interior products, the IP rating stated is from below the ceiling



Photometric Data

Unit: cd C0/C180 C90/C270

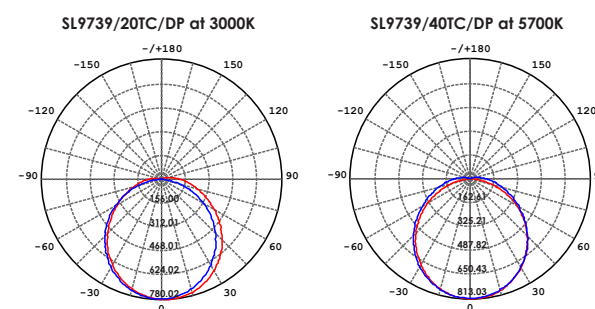

DUAL POWER

TC SELECTABLE COLOUR

ECOLINE WIDE SL9738 TC/DP2 - 10W/40W

LED extra wide 110mm body diffused batten
with selectable CCT and Dual Power

Application

Extra wide 110mm linear LED batten for
residential or commercial service spaces

Design Specifications

- 110mm extra wide steel body
- White powder coat finish with PC diffuser
- Large terminal block, easy installation
- Selectable CCT 3000K/4000K/5700K
- High efficiency LED optics,
CRI >80, 120° beam distribution
- Integral flickerCONTROLLED non-dimmable
LED driver with selectable power
- Emergency options available
- Non-dimmable corridorSTANDBY options

Performance

- Dimmable - optional, trailing edge,
DALI / DSI



Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimension L x W x H (mm)
SL9738/20TC/DP2	240/50	10 20	1300/1400/1380 2200/2450/2350	3000/4000/5700	120°	White	610 x 110 x 65
SL9738/40TC/DP2	240/50	20 40	2600/2780/2750 4600/5200/4900	3000/4000/5700	120°	White	1225 x 110 x 65
SL9738/20TC2DIM	240/50	20	2200/2400/2350	3000/4000/5700	120°	White	610 x 110 x 65
SL9738/40TC2DIM	240/50	40	4600/4950/4800	3000/4000/5700	120°	White	1225 x 110 x 65


For terms of catalogue data use, refer to INDEX



Photometric Data

Unit: cd C0/C180 C90/C270

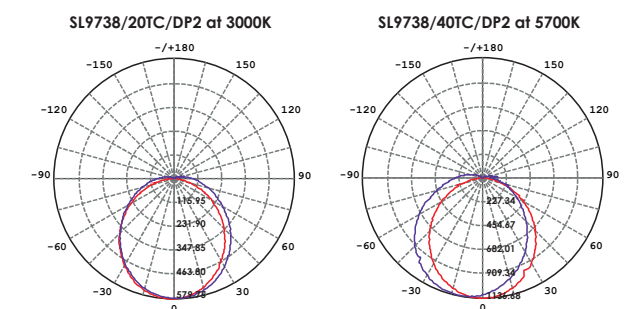



LEDLINE

SLD2000TC/MP - 20W

SLD4000TC/MP - 40W

LED diffused batten 20 or 40 watt with selectable CCT and Dual Power

Application

Conventional LED linear surface mount battens for commercial service space

Design Specifications

- Robust, pressed steel body profile 100mm wide with a white powder coat finish and opal PMMA diffuser
- High efficiency LED optics, CRI > 80
- Integral flickerCONTROLLED non-dimmable LED driver as standard, optional dimming, emergency and sensor functions available
- Unique diffuser design allows end to end installation and large terminal block for easy installation


Performance

- Dimmable - OPTIONAL
- Dimmer Type - Trailing edge, 1-10V, DALI / DSI
- In Built Sensor - OPTIONAL MV



Photometric Data

Unit: cd C0/C180 — C90/C270

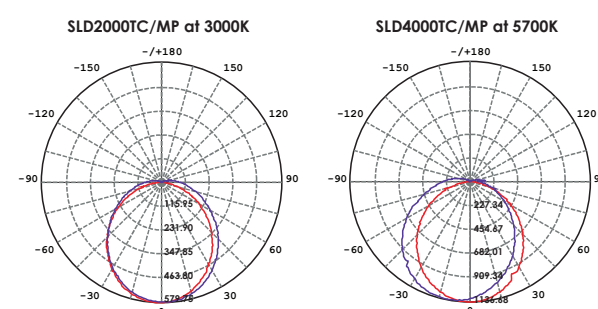

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimension L x W x H (mm)
SLD2000TC/MP	240/50	Max. 20	2250/2400/2300	3000/4000/5700	110°	White	600 x 100 x 77
SLD4000TC/MP	240/50	Max. 40	4500/4800/4600	3000/4000/5700	110°	White	1120 x 100 x 77

For interior products, the IP rating stated is from below the ceiling



Image courtesy of





TC SELECTABLE COLOUR

PHOENIX II SL9775TC - 30W

30 watt LED linkable with selectable CCT

Application

Decorative commercial service spaces,
meeting rooms, amenity areas

Design Specifications

- Extruded rectangular aluminium profile with an opal polycarbonate diffuser
- Choice of white or black finish
- High efficiency LED optics, CRI > 80
- Selectable CCT 3000/4000/5700K
- Integral 1-10V dimmable LED driver
- Surface mount or suspended
- Suspension kit (2 off 1800mm drops) incl.
- Optional surface mount, accessories to order (SL9775TC/CLIP - pack of two)
- Max connected units 15 off, optional straight joiner required (SL9775TC/LINK - pack of one)
- Continuous 5m diffuser roll (SL9775TC/DF5)

Performance

- Dimmable 1-10V




SL9775TC/BK

SL9775TC/WH

Photometric Data

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL9775TC/WH	240/50	30	3100/3300/3300	3000/4000/5700	> 80	105°	White	1129 x 35 x 50
SL9775TC/BK	240/50	30	3100/3300/3300	3000/4000/5700	> 80	105°	Black	1129 x 35 x 50

For interior products, the IP rating stated is from below the ceiling



DUAL POWER

TC SELECTABLE COLOUR



PHOENIX MINI SL9773 DC - 15W/40W

LED architectural profile, designed with
selectable CCT and Dual Power

Application

Decorative commercial service spaces,
meeting rooms, amenity areas

Design Specifications

- Low profile, extruded rectangular aluminium design with an opal polycarbonate diffuser
- Choice of white or black finish
- High efficiency LED optics, CRI > 80, beam distribution 105°
- Integral flickerCONTROLLED control gear
- Selectable CCT 3000/4000K
- Selectable power
- Suspended kit included 1800mm drop, non-linkable design

Performance

- Non-dimmable




SL9773/1128DC/BK

SL9773/1128DC/WH

Photometric Data

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL9773/1128DC/WH	240/50	15/30	1500/1550/2850/3000	3000/4000	> 80	105°	White	1128 x 25 x 25
SL9773/1128DC/BK	240/50	15/30	1500/1550/2850/3000	3000/4000	> 80	105°	Black	1128 x 25 x 25
SL9773/1500DC/WH	240/50	20/40	2000/2100/3800/4000	3000/4000	> 80	105°	White	1500 x 25 x 25
SL9773/1500DC/BK	240/50	20/40	2000/2100/3800/4000	3000/4000	> 80	105°	Black	1500 x 25 x 25

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

SLIMLINE SEAMLESS TC LINKABLE SL9706 TC - 4W/22W

Selectable CCT, linkable slimline LED
batten profile

Application

Great for commercial shop spaces,
home pantries, walk-in wardrobes

Design Specifications

- Selectable CCT 3000K / 4000K / 5700K,
beam distribution 120°, CRI >80
- Polycarbonate body profile and opal diffuser
- Integral constant current non-dimmable driver
- Individual switch control, plug and play flex
and plug included
- Accessories: SL9706/32CM LINK (L 320mm)
SL9706/76CM LINK (L 760 mm)
- Double insulated

Performance

- Non-dimmable








Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
SL9706/280TC	240/50	4	350/400/350	3000/4000/5700	> 80	120°	No	White
SL9706/540TC	240/50	9	850/1050/900	3000/4000/5700	> 80	120°	No	White
SL9706/840TC	240/50	13	1300/1500/1400	3000/4000/5700	> 80	120°	No	White
SL9706/1140TC	240/50	18	1800/2100/1850	3000/4000/5700	> 80	120°	No	White
SL9706/1440TC	240/50	22	2150/2450/2200	3000/4000/5700	> 80	120°	No	White

For interior products, the IP rating stated is from below the ceiling



Dimensions

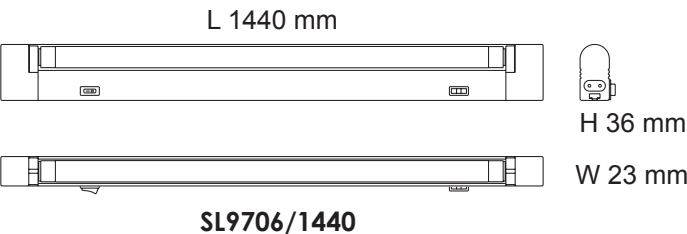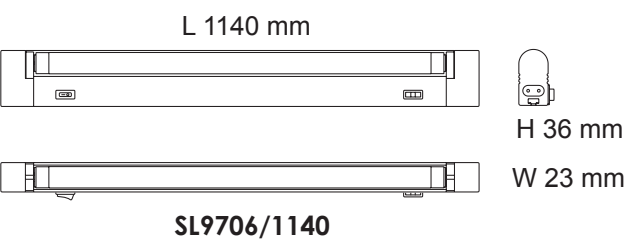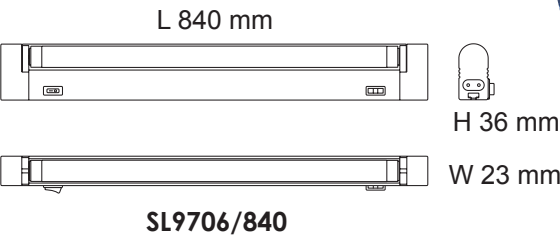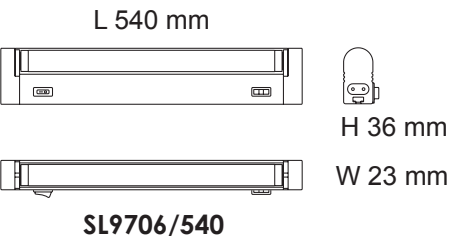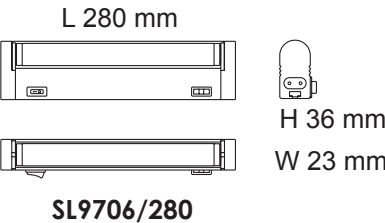

For terms of catalogue data use, refer to INDEX



Image courtesy of



TUBELINE STD25 TC - 9W/36W

Conventional LED tube diffused
battens 9 - 36 watt, with selectable CCT
and GEMS approved lamps

Application

Conventional linear LED batten profile ideal
for residential and commercial spaces

Design Specifications

- Durable metal body profile, white powder coat finish
- High efficiency LED T8 tubes included with selectable CCT, CRI >90
- Large terminal block, easy installation
- Integral safety HRC fuse
- High performance PMMA prismatic diffuser, beam distribution 120°
- GEMS approved lamps

Performance


- Non-dimmable



Photometric Data

STD25/212TC at 4000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
STD25/106TC	240/50	9	750/850/750	3000/4000/6000	120°	White	620 x 69 x 83
STD25/112TC	240/50	18	1500/1700/1550	3000/4000/6000	120°	White	1230 x 69 x 83
STD25/206TC	240/50	2 x 9	1550/1750/1600	3000/4000/6000	120°	White	620 x 109 x 83
STD25/212TC	240/50	2 x 18	3050/3450/3150	3000/4000/6000	120°	White	1230 x 109 x 83

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

TITAN

S9776 TC - 40W/80W

40 or 80 watt LED connectable profile

Application

Decorative commercial applications, meeting rooms or amenity areas

Design Specifications

- Extruded aluminium profile colour white or black, with opal polycarbonate diffuser
- High efficiency LED optics, CRI >80, beam distribution 90°
- Selectable CCT 3000K/4000K/5700K
- Integral constant current non-dimmable LED driver 40 or 80 watt as standard
- Adjustable suspension kit included (2 x SSY1512),
- Accessory option - straight link (S9776IP)
- Surface mounted (allow min. 200 mm clearance at both ends)
- Loop in loop out cable duct


Performance

- Dimmable - Optional
- Dimmer Type, Trailing edge, DALI / DSI




S9776/40TC

S9776/40TC/BK

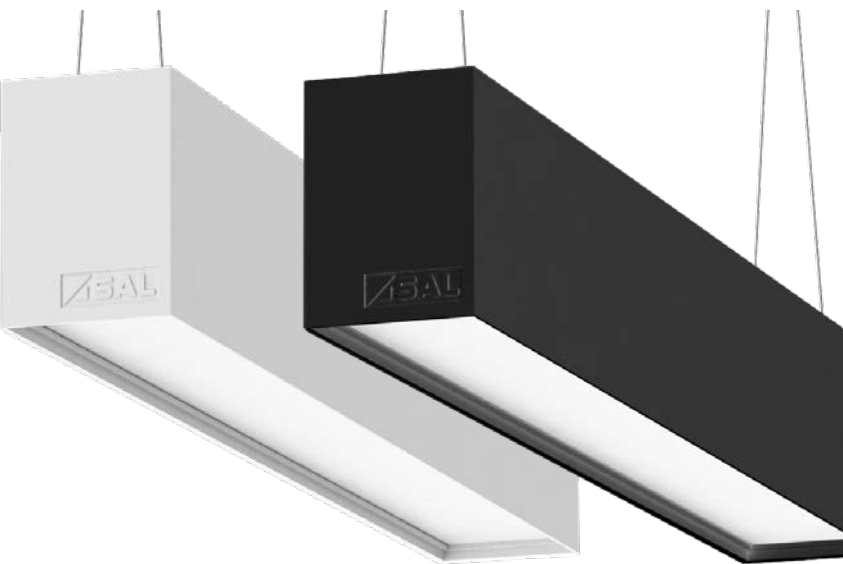

Photometric Data

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Dimmable	Fitting Colour	Dimensions (L x W x H mm)
S9776/40TC	240/50	40	3900/4050/3950	3000/4000/5700	Optional	White	1136 x 71 x 99
S9776/40TC/BK	240/50	40	3900/4050/3950	3000/4000/5700	Optional	Black	1136 x 71 x 99
S9776/80TC	240/50	80	7800/8100/7900	3000/4000/5700	Optional	White	2256 x 71 x 99
S9776/80TC/BK	240/50	80	7800/8100/7900	3000/4000/5700	Optional	Black	2256 x 71 x 99

For interior products, the IP rating stated is from below the ceiling



DUAL POWER

TC SELECTABLE COLOUR

WIDELINE

SL9733 TC/DP - 9W/55W

LED super wide 160mm body diffused batten
9 - 55 watt with selectable CCT and Dual Power

Application

Low profile design suitable for residential apartments and commercial service spaces

Design Specifications

- Super wide 160mm pressed steel base with opal polycarbonate diffuser
- Quality white powder coated finish
- High efficiency LED optics, CRI >80, beam distribution 120°
- Integral constant current non-dimmable LED driver
- Selectable CCT 3000K/4000K/5700K
- Large terminal block, for easy installation

Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL9733/206TC/DP	240/50	9/18	1200/1250/1230 2100/2300/2200	3000/4000/5700	> 80	120°	White	610 x 160 x 63
SL9733/212TC/DP	240/50	18/36	2300/2400/2350 3800/4150/3900	3000/4000/5700	> 80	120°	White	1145 x 160 x 63
SL9733/215TC/DP	240/50	28/55	3550/3700/3650 5900/6350/6100	3000/4000/5700	> 80	120°	White	1495 x 160 x 63


For terms of catalogue data use, refer to INDEX



160mm WIDE

Photometric Data

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270

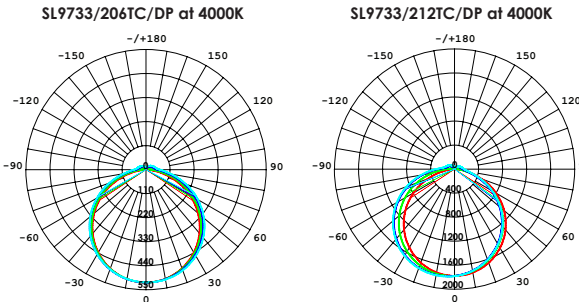

SMARTER LIGHTING CHOICES



🏠 SAL National Pty Ltd - 40 Biloela St, Villawood NSW 2163

☎ + 61 2 9723 3099

🌐 www.sal.net.au

✉ info@sal.net.au

🏠 VICT/TAS - 46/48 Keys Road Moorabbin VIC 3189

☎ + 61 3 9532 3168

✉ info@sal.net.au

🏠 QLD - 36 Whitelaw Place Richlands QLD 4077

☎ + 61 7 3879 5999

✉ info@sal.net.au

🏠 SA/NT - 79 Frederick St, Welland SA 5009

☎ +61 8 7084 1958

✉ info@sal.net.au

🏠 WA - 29 Beringarra Avenue Malaga WA 6090

☎ +61 8 9248 7458

✉ info@sal.net.au



2026/28