

SMARTER LIGHTING CHOICES



SAL Lighting a Smarter Future  



2026/28





A stylish selection of decorative interior LED Track systems, ideal for retail environments.





SINGLE CIRCUIT UNIVERSAL TRACK & ACCESSORIES STR4800

Single circuit track, universal HALO type

Application


Designed for creative retail or residential applications

Design Specifications

- Extruded aluminium profile, with quality powder coat finish
- Length 1 m or 2 m
- Complete with end cap and live end
- Track components: Straight joiner, Live end, Live centre feed, L-shaped joiner, T-shaped joiner, Cross joiner, Track adaptor, Suspension kit
- Rating: TOTAL current capacity 10A per system


Track Components

Straight Joiner




Model No.	Colour
STR4801 WH	White
STR4801 BK	Black

Live End




Model No.	Colour
STR4802 WH	White
STR4802 BK	Black

Live Centre Feed




Model No.	Colour
STR4803 WH	White
STR4803 BK	Black

L-shaped Joiner




Model No.	Colour
STR4804 WH	White
STR4804 BK	Black

Dimensions

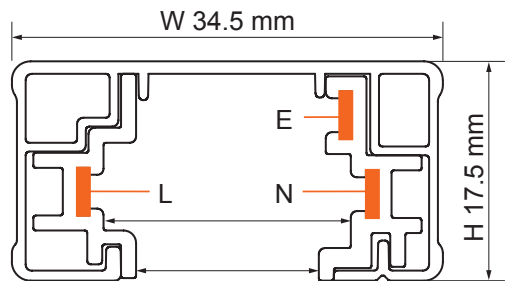


T-shaped Joiner




Model No.	Colour
STR4805 WH	White
STR4805 BK	Black

Cross Joiner



Model No.	Colour
STR4806 WH	White
STR4806 BK	Black


Track Adaptor



Model No.	Colour
STR4808 WH	White
STR4808 BK	Black

Maximum (mass) load limit per track adaptor is 2kg

Suspension Kit




Model No.	Colour
SSI1512	Stainless Steel

For interior products, the IP rating stated is from below the ceiling



SINGLE CIRCUIT TRACK DIAGRAM

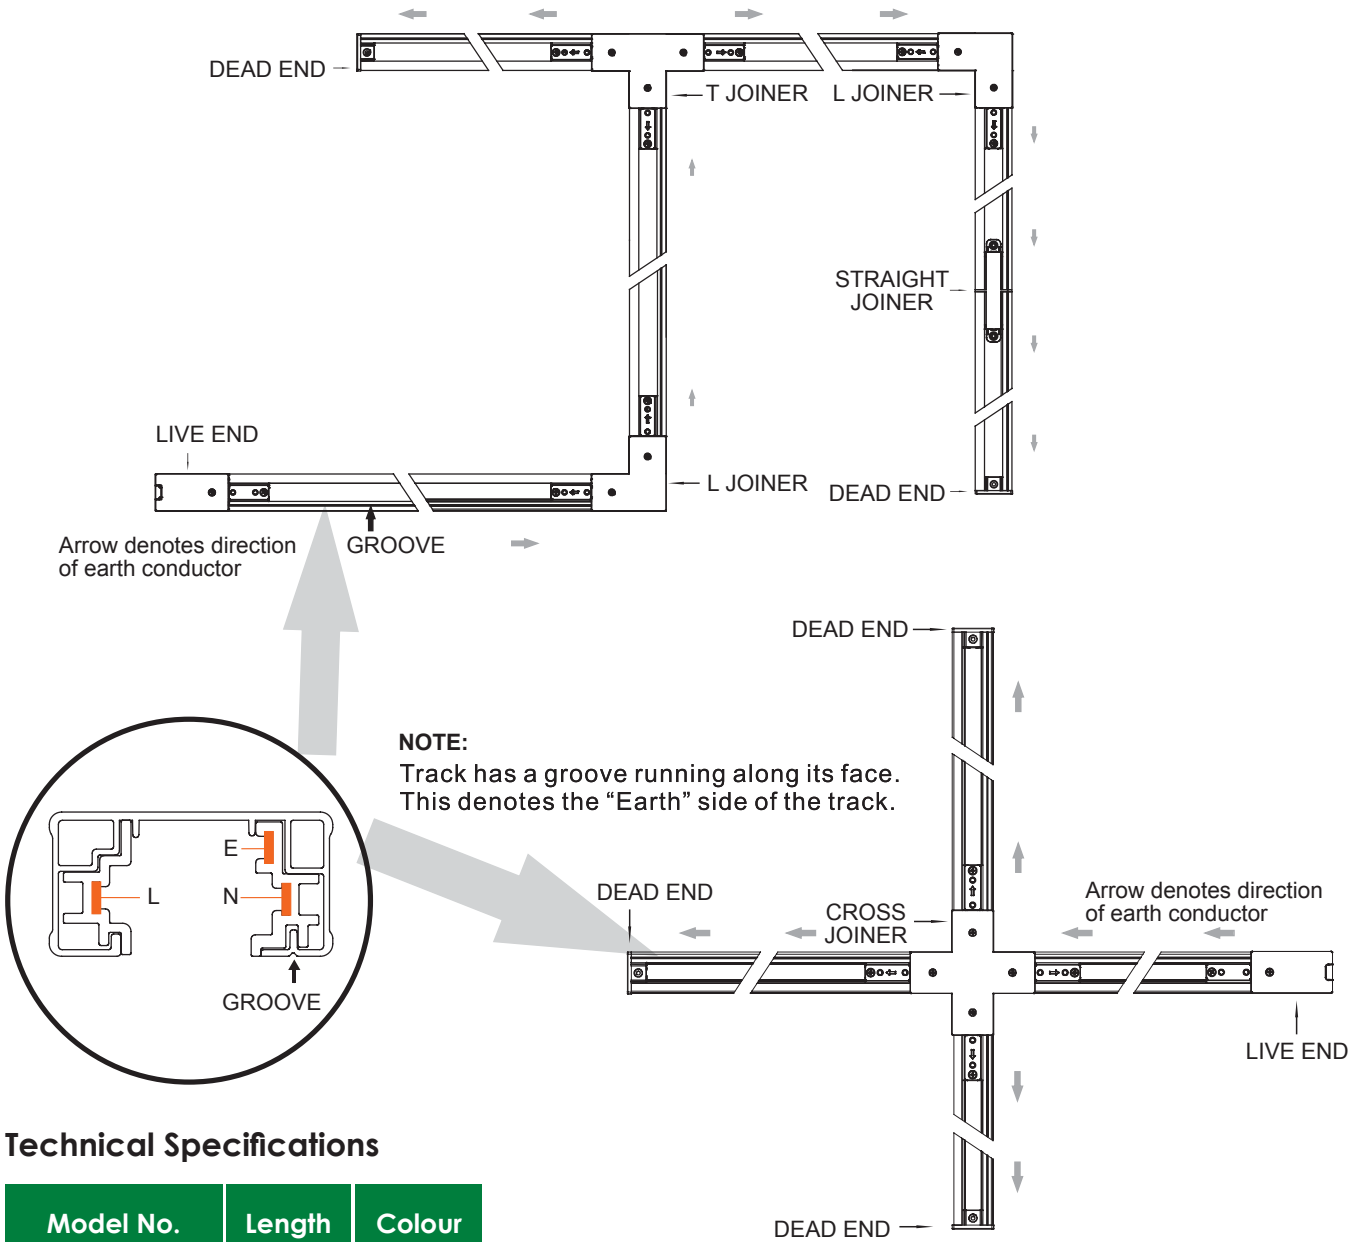

Technical Specifications

Model No.	Length	Colour
STR4800/1 WH	1 m	White
STR4800/1 BK	1 m	Black
STR4800/2 WH	2 m	White
STR4800/2 BK	2 m	Black
STR4800EC/WH	—	White
STR4800EC/BK	—	Black



For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

SPOT II LED GU10 SINGLE CIRCUIT LED TRACK LIGHT STR4863TC - 4W

4 watt LED GU10, architectural single circuit track spot

Application

Ideal for decorative retail and interior residential spaces

Design Specifications


- Aluminium body profile
- Powder coat finish in white or black
- GU10 lamp base
- Selectable CCT GU10 lamp included, 3000/4000/6000K CRI>80, beam distribution 50°
- 350° horizontal rotation, 120° vertical
- Lamp options: GU10L550TC, GU10LR750, GU10LA750 (trailing edge dimmable)

Performance

- Dimmable - Optional, Trailing edge dimmable lamp GU10LA750



Dimensions

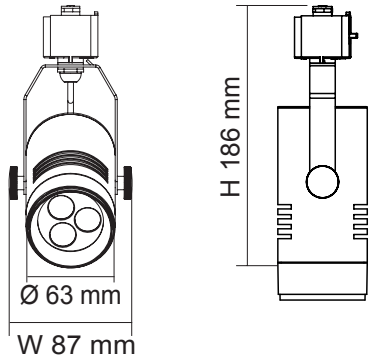

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
STR4863TC/WH	240/50	4	360/400/380	3000/4000/6000	> 80	50°	Optional	White
STR4863TC/BK	240/50	4	360/400/380	3000/4000/6000	> 80	50°	Optional	Black

For interior products, the IP rating stated is from below the ceiling



DUAL POWER

TC SELECTABLE COLOUR

UNITREK SLIMLINE DIMMABLE SINGLE CIRCUIT LED TRACK LIGHT STR9015 DC - 10W/28W

Single circuit, dimmable 15/20/28 watt architectural track spot, with integral driver, selectable power and CCT

Application


Ideal for decorative retail or interior residential spaces

Design Specifications


- Durable aluminium body profile in a choice of white or black
- High performance LED optics, CRI >90, beam distribution 40° and selectable CCT 3000K / 4000K / 5700K
- Integral trailing edge dimmable driver, with flickerCONTROLLED technology
- Selectable power 10/15, 15/20, 20/28 watt
- Horizontal optical rotation of 350° and vertical tilt of 90°

Performance

- Dimmable - Trailing edge

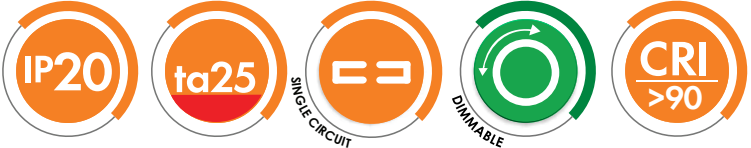

Dimensions

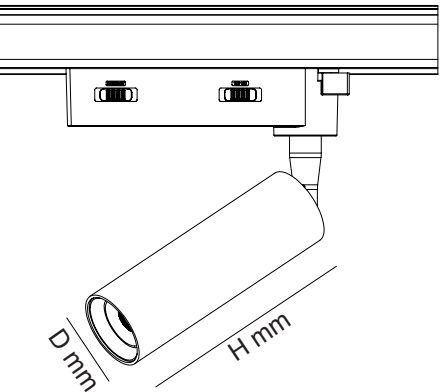

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimension (D x H mm)
STR9015/15DC/WH STR9015/15DC/BK	240/50	10 15	900/950/950 1350/1420/1420	3000/4000/5700	> 90	40°	White Black	Ø42 x 128
STR9015/20DC/WH STR9015/20DC/BK	240/50	15 20	1350/1420/1420 1800/1900/1900	3000/4000/5700	> 90	40°	White Black	Ø50 x 128
STR9015/30DC/WH STR9015/30DC/BK	240/50	20 28	1800/1900/1900 2520/2660/2660	3000/4000/5700	> 90	40°	White Black	Ø60 x 128

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

UNITREK DIMMABLE
SINGLE CIRCUIT LED TRACK LIGHT
STR9017 TC - 10W/15W

Single circuit, dimmable 10/15 watt architectural track spot, with integral driver

Application


Ideal for decorative retail or interior residential spaces

Design Specifications


- Durable Polyamide body profile, colour white or black
- High output LED optics, CRI >80, selectable CCT 3000K / 4000K / 5700K
- Polycarbonate lens, 40° beam distribution
- 10/15 watt integral trailing edge dimmable driver
- Optional black or white baffle available

Performance

- Dimmable - Trailing edge

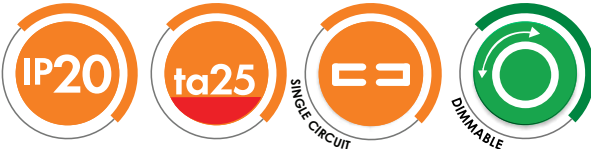

Dimensions

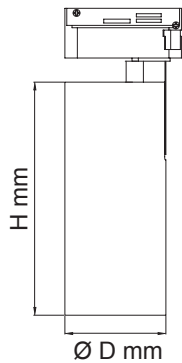

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimension (D x H mm)
STR9017/10TC/WH	240/50	10	580/700/630	3000/4000/5700	> 80	40°	White	Ø 60 x 125
STR9017/10TC/BK	240/50	10	580/700/630	3000/4000/5700	> 80	40°	Black	Ø 60 x 125
STR9017/15TC/WH	240/50	15	1000/1150/1100	3000/4000/5700	> 80	40°	White	Ø 70 x 140
STR9017/15TC/BK	240/50	15	1000/1150/1100	3000/4000/5700	> 80	40°	Black	Ø 70 x 140

For interior products, the IP rating stated is from below the ceiling



DUAL POWER

TC SELECTABLE COLOUR

UNITREK
SINGLE CIRCUIT LED TRACK LIGHT
STR9017/30TC/DP - 21W/30W

Single circuit, 21/30 watt architectural track spot, with integral driver

Application

Ideal for decorative retail or interior residential spaces

Design Specifications


- Durable Polyamide body profile, colour white or black
- High output LED optics, CRI >80, selectable CCT 3000K / 4000K / 5700K
- Polycarbonate lens, 40° beam distribution
- 21/30 watt integral non-dimmable LED driver
- Optional black or white baffle available

Performance

- Non-dimmable



Dimensions

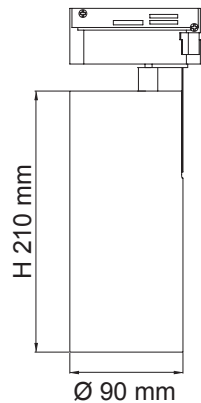

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimension (D x H mm)
STR9017/30TC/DP/WH	240/50	21/30	1600/1900/1700 2100/2400/2200	3000/4000/5700	40°	White	Ø 90 x 210
STR9017/30TC/DP/BK	240/50	21/30	1600/1900/1700 2100/2400/2200	3000/4000/5700	40°	Black	Ø 90 x 210

For terms of catalogue data use, refer to INDEX



THREE CIRCUIT TRACK STR4890

Universal track - three circuit

Application

Designed for creative retail or residential applications

Design Specifications

- Extruded aluminium profile
- Power coat finish in black or white
- Profile length choices 1m or 2m
- Complete with one end cap
- Rating: TOTAL current capacity 16A per system


Track Components

Mini Joiner



Model No.	Colour
STR4891 WH	White
STR4891 BK	Black

Live End




Model No.	Colour
STR4892 WH	White
STR4892 BK	Black

Straight Connector



Model No.	Colour
STR4893 WH	White
STR4893 BK	Black

L-shaped Connector




Model No.	Colour
STR4894 WH	White
STR4894 BK	Black

T-shaped Connector



Model No.	Colour
STR4895 WH	White
STR4895 BK	Black


Cross Shaped Connector




Model No.	Colour
STR4896 WH	White
STR4896 BK	Black



Dimensions



Adjustable Connector



Model No.	Colour
STR4897 WH	White
STR4897 BK	Black

Circuits Adaptor



Model No.	Colour
STR4898 WH	White
STR4898 BK	Black

T-bar Mounting Kit



Model No.	Colour
STR4899/1 WH	White
STR4899/1 BK	Black

Suspension Unit with Rod (M6 x 1000 mm threaded rod)




Model No.	Colour
STR4899/2 WH	White
STR4899/2 BK	Black

Suspension Unit with Wire (Ø1.5 mm x 1500 mm wire)




Model No.	Colour
STR4899/3 WH	White
STR4899/3 BK	Black

For interior products, the IP rating stated is from below the ceiling



THREE CIRCUIT TRACK

Assembly note: The Track system is designed with a raised spline that runs along one side of the track and the track components all have an arrow on one side. To assemble, insert each component into the track so that the arrow is on the same side as the raised spline.

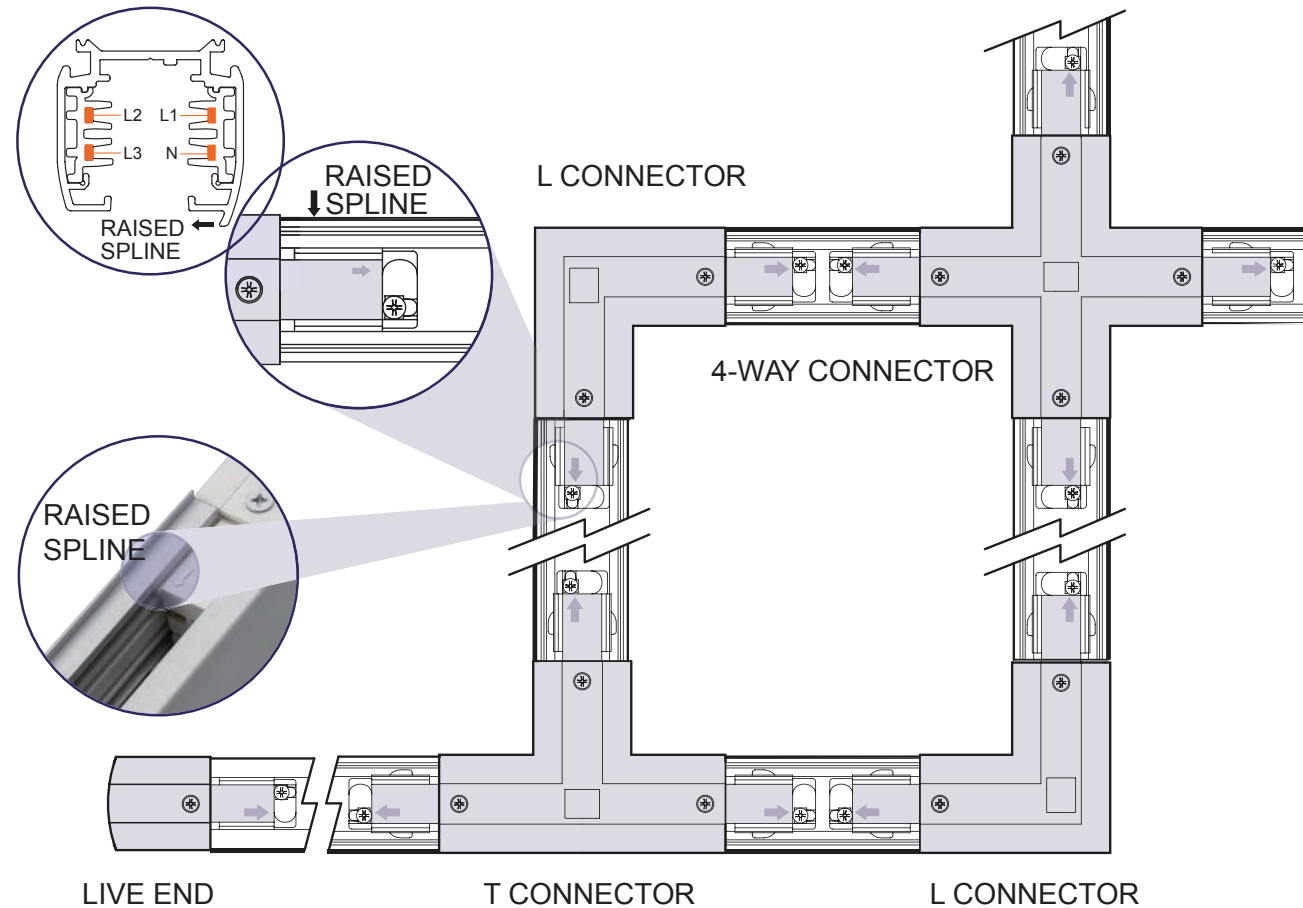

Technical Specifications

Model No.	Length	Colour
STR4890/1 WH	1 m	White
STR4890/1 BK	1 m	Black
STR4890/2 WH	2 m	White
STR4890/2 BK	2 m	Black
STR4890EC/WH	—	White
STR4890EC/BK	—	Black



For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

UNITREK THREE CIRCUIT LED TRACK LIGHT STR3/9017/15TC - 15W

15 watt architectural, three circuit track spot

Application

Ideal for decorative interior and retail designs

Design Specifications

- Architectural cylindrical shape, 350° horizontal rotation
- Durable Polyamide body profile, colour white or black
- High efficiency LED optics, CRI >80, CCT selectable 3000K/4000K/5700K
- Multi-faceted reflector system, standard beam distribution 40°
- 15 watt integral dimmable LED driver
- Optional black or white baffle available

Performance

- Dimmable




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimension (D x H mm)
STR3/9017/15TC/WH	240/50	15	1000/1150/1100	3000/4000/5700	40°	White	Ø 70 x 140
STR3/9017/15TC/BK	240/50	15	1000/1150/1100	3000/4000/5700	40°	Black	Ø 70 x 140

For interior products, the IP rating stated is from below the ceiling




Dimensions



Photometric Data

STR3/9017/15TC at 3000K

Unit: cd C0/C180 C90/C270



DUAL POWER

TC SELECTABLE COLOUR

UNITREK THREE CIRCUIT LED TRACK LIGHT STR3/9017/30TC/DP - 21W/30W

30 watt architectural, three circuit track spot

Application

Ideal for decorative interior and retail designs

Design Specifications

- Architectural cylindrical shape, 350° horizontal rotation
- Durable Polyamide body profile, colour white or black
- High efficiency LED optics, CRI >80, CCT selectable 3000K/4000K/5700K
- Multi-faceted reflector system, standard beam distribution 40°
- Optional black or white baffle available

Performance

- Non-dimmable




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimension (D x H mm)
STR3/9017/30TC/DP/WH	240/50	21/30	1600/1900/1700/2100/2400/2200	3000/4000/5700	40°	White	Ø 90 x 210
STR3/9017/30TC/DP/BK	240/50	21/30	1600/1900/1700/2100/2400/2200	3000/4000/5700	40°	Black	Ø 90 x 210

For terms of catalogue data use, refer to INDEX




Dimensions



Photometric Data

STR3/9017/30TC/DP at 3000K

Unit: cd C0/C180 C90/C270





MULTI POWER
TC SELECTABLE COLOUR

CAMDEN THREE CIRCUIT LED TRACK LIGHT STR4886MP TC - 20W /35W

Decorative three circuit, rotatable LED track light, with multi-focus adjustments, selectable CCT and power

Application


Designed for decorative residential, retail and commercial applications

Design Specifications

- Extruded aluminium profile, horizontal 350° rotation, 90° vertical tilt
- White or black powder coated finish
- High output LED optics, CRI >90, CCT selectable 2700K/4000K/6000K
- Adjustable beam distribution, 24° - 60°
- Integral constant current non-dimmable, selectable power.

Performance

- Non-dimmable

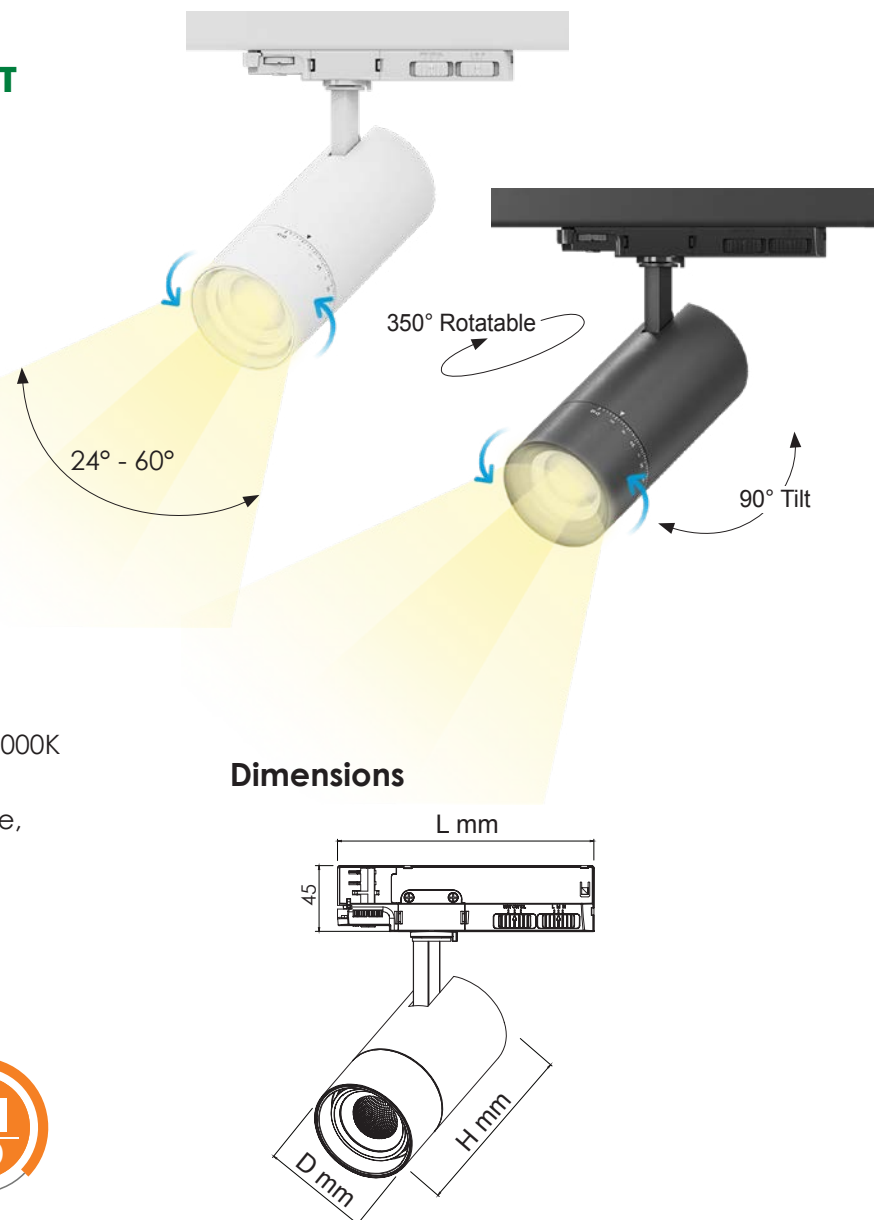

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Dimension (L x D x H mm)
STR4886MP30TC/WH	240/50	20	1600/1750/1750	2700/4000/6000	24° - 60° adjustable	170 x 72 x 145
STR4886MP30TC/BK		25	1850/2050/2050			
		30	2100/2300/2250			
STR4886MP40TC/WH	240/50	25	2450/2700/2800	2700/4000/6000	24° - 60° adjustable	170 x 80 x 185
		30	2750/3100/3100			
STR4886MP40TC/BK		35	3200/3500/3450			

For interior products, the IP rating stated is from below the ceiling



MULTI POWER
TC SELECTABLE COLOUR

WARRAGUL THREE CIRCUIT LED TRACK LIGHT STR4884MP TC - 15W/25W STR4885MP TC - 25W/35W

Decorative three circuit, rotatable LED track light, with selectable CCT and power.

Application



Designed for decorative residential, retail and commercial applications

Design Specifications

- Aluminium profile, horizontal 350° rotation, 90° vertical tilt
- Choice of white or black powder coated finish
- High performance LED optics, CRI >90
- CCT selectable 2700K / 4000K / 6000K
- Beam distribution 36°
- Integral non-dimmable flickerCONTROLLED gear with selectable power 15/20/25W, 25/30/35W

Performance

- Non-dimmable

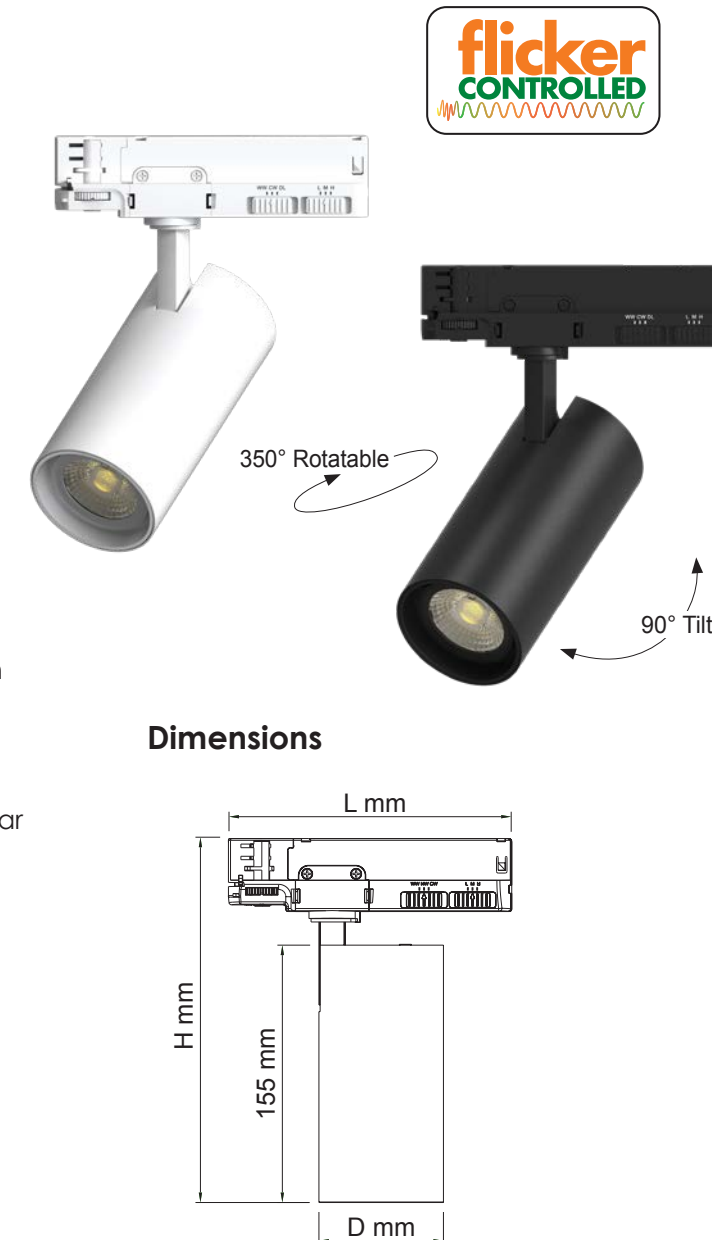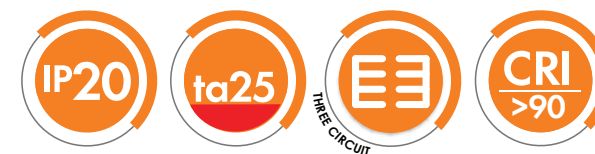

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Fitting Colour	Dimension (L x D x H mm)
STR4884MP25TC/WH	240/50	15/20/25	2700/3100/3000	2700/4000/6000	White	170 x 75 x 220
STR4884MP25TC/BK	240/50	15/20/25	2500/2900/2800	2700/4000/6000	Black	170 x 75 x 220
STR4885MP35TC/WH	240/50	25/30/35	3600/3900/3800	2700/4000/6000	White	170 x 85 x 210
STR4885MP35TC/BK	240/50	25/30/35	3200/3500/3400	2700/4000/6000	Black	170 x 85 x 210

For terms of catalogue data use, refer to INDEX

SMARTER LIGHTING CHOICES



 SAL National Pty Ltd - 40 Biloela St, Villawood NSW 2163

 + 61 2 9723 3099

 www.sal.net.au

 info@sal.net.au

 VICT/TAS - 46/48 Keys Road Moorabbin VIC 3189

 + 61 3 9532 3168

 info@sal.net.au

 QLD - 36 Whitelaw Place Richlands QLD 4077

 + 61 7 3879 5999

 info@sal.net.au

 SA/NT - 79 Frederick St, Welland SA 5009

 +61 8 7084 1958

 info@sal.net.au

 WA - 29 Beringarra Avenue Malaga WA 6090

 +61 8 9248 7458

 info@sal.net.au



2026/28