

SMARTER LIGHTING CHOICES



SAL Lighting a Smarter Future  



2026/28





A robust range of residential, commercial and industrial LED bulkheads with optional sensor control.



TC SELECTABLE COLOUR

BENDIGO SL7273TC – 15W

Robust, IP54 LED surface mount luminaire, IK06 rated

Application

A great solution for residential interior or (covered eave) exterior spaces and security

Design Specifications

- Low profile polycarbonate body and visor
- Choice of white or black profiles
- Integral 15W flickerCONTROLLED LED control gear
- Selectable CCT 3000 / 4000 / 5700K

Performance

- Dimmable - No




Dimensions



Photometric Data

SL7273TC at 3000K

Unit: cd C0/C180 C90/C270

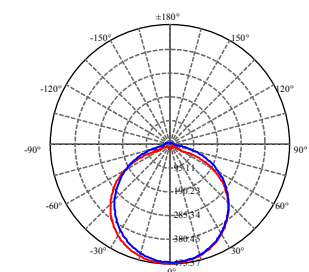

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL7273TC/WH	240/50	15	1100/1200/1100	3000/4000/5700	> 80	120°	White	195 x 121 x 43
SL7273TC/BK	240/50	15	1100/1200/1100	3000/4000/5700	> 80	120°	Black	195 x 121 x 43

For terms of catalogue data use, refer to INDEX



BRONX
SE7089BK - 50W

Vandal resistant, IP65 LED wall mount luminaire,
IK10 rated

Application


A robust solution for commercial exterior
spaces and security

Design Specifications

- Die-cast aluminium body
- Durable black powder coat finish
- UV stabilised opal polycarbonate diffuser
- High efficiency LED optics
- Integral non-dimmable LED driver, prewired
with 450mm of 3 x core rubber flex



Dimensions

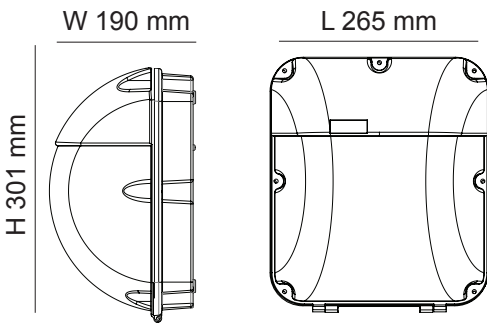

Performance


- Dimmable - No



Photometric Data

SE7089BK at 5000K

Unit: cd C0/C180 — C90/C270

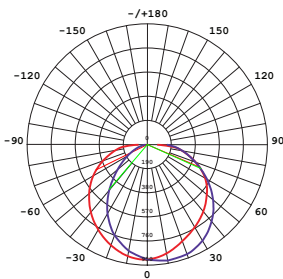

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
SE7089BK	240/50	50	4500	5000	> 70	No	Black



IK ratings , why are they important?



An IK rating of a lighting product is covered by BS EN 62262 and is a measure
of the impact resistance of a product.

The test process measures a products mechanical impact (impact energy
joules) limits, against a known mass and varied distances.

As a guide, the higher the IK rating (limit IK10), the higher the products ability to
withstand impact forces. For example, an IK10 rated product would be seen in
harsh environments, such as vandal prone installations or correctional centres.

IK RATING CHART

IK00 No protection	IK05 Protected against 0.7 joules of impact (equivalent of a 0.25 kg object dropped from a height of 280mm).
IK01 Protected against 0.14 joules of impact (equivalent of a 0.25 kg object dropped from a height of 56mm).	IK06 Protected against 1 joules of impact (equivalent of a 0.25 kg object dropped from a height of 400mm).
IK02 Protected against 0.2 joules of impact (equivalent of a 0.25 kg object dropped from a height of 80mm).	IK07 Protected against 2 joules of impact (equivalent of a 0.5 kg object dropped from a height of 400mm).
IK03 Protected against 0.35 joules of impact (equivalent of a 0.25 kg object dropped from a height of 140mm).	IK08 Protected against 5 joules of impact (equivalent of a 1.7 kg object dropped from a height of 300mm).
IK04 Protected against 0.5 joules of impact (equivalent of a 0.25 kg object dropped from a height of 200mm).	IK09 Protected against 10 joules of impact (equivalent of a 5.0 kg object dropped from a height of 200mm).
	IK10 Protected against 20 joules of impact (equivalent of a 5.0 kg object dropped from a height of 400mm).



TC SELECTABLE COLOUR

BUNKER 15 OVAL SL7271TC - 15W

LED 15 watt surface mount oval shaped
bunker, selectable CCT, IP65

Application


A robust solution for residential and
apartment interior or (covered eave)
exterior utility spaces

Design Specifications

- Durable white or black polycarbonate body, opal polycarbonate diffuser
- Integral control gear, 15 watt
- CRI >80, 1400/1500/1450lm
- Selectable CCT 3000/4000/6500K
- Quick connect installation design
- Robust IK06 protection, wall or ceiling mount



Dimensions

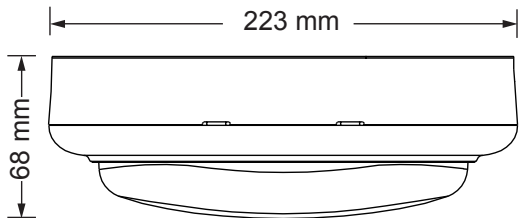

Performance


- Dimmable - No



Photometric Data

SL7271TC at 4000K

Unit: cd C0/C180 C90/C270

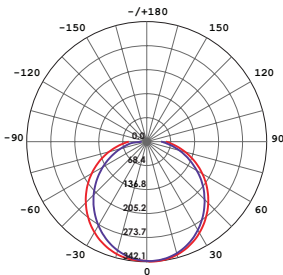

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL7271TC/WH	240/50	15	1400/1500/1450	3000/4000/6500	110°	White	223 x 131 x 68
SL7271TC/BK	240/50	15	1400/1500/1450	3000/4000/6500	110°	Black	223 x 131 x 68



TC SELECTABLE COLOUR

BUNKER 15 OVAL WITH SENSOR SL7271TC/S - 15W

LED 15 watt surface mount oval shaped
bunker, selectable CCT, IP54 with PIR sensor

Application


A robust solution for residential and
apartment interior or (covered eave)
exterior utility spaces

Design Specifications

- Durable white or black polycarbonate body, opal polycarbonate diffuser
- Integral control gear, 15 watt
- PIR sensor control, fixed 30 seconds ON with motion trigger
- Detection distance 7 metres diameter at 2.5hm, daylight threshold <20 lux
- CRI >80, 1400/1500/1450lm
- Selectable CCT 3000/4000/6500K
- Quick connect installation design
- Robust IK06 protection, wall or ceiling mount



Dimensions

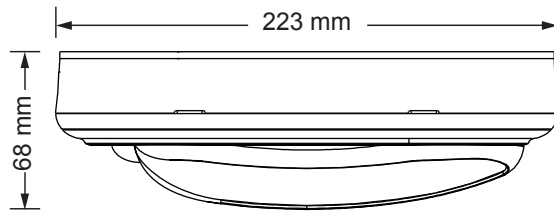

Performance


- Dimmable - No



Photometric Data

SL7271TC/WH/S at 4000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL7271TC/WH/S	240/50	15	1400/1500/1450	3000/4000/6500	110°	White	223 x 131 x 68
SL7271TC/BK/S	240/50	15	1400/1500/1450	3000/4000/6500	110°	Black	223 x 131 x 68

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

BUNKER 15 ROUND SL7272TC - 15W

LED 15 watt surface mount round shaped
bunker, selectable CCT, IP65

Application

A robust solution for residential and
apartment interior or (covered eave)
exterior utility spaces

Design Specifications

- Durable white or black polycarbonate
body, opal polycarbonate diffuser
- Integral control gear, 15 watt
- CRI >80, 1350/1450/1400lm
- Selectable CCT 3000 /4000 / 6500K
- Quick connect installation design
- Robust IK06 protection, wall or
ceiling mount

Performance

- Dimmable - No




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SL7272TC/WH	240/50	15	1350/1450/1400	3000/4000/6500	110°	White	Ø 180 x 66
SL7272TC/BK	240/50	15	1350/1450/1400	3000/4000/6500	110°	Black	Ø 180 x 66




Dimensions

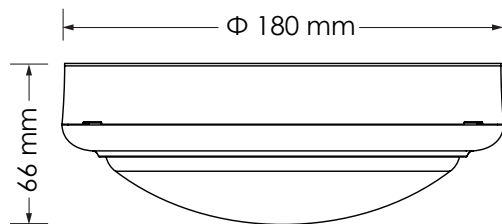

Photometric Data

SL7272TC at 4000K

Unit: cd C0/C180 C90/C270



TC SELECTABLE COLOUR

BUNKER 15 ROUND WITH SENSOR SL7272TC/S - 15W

LED 15 watt surface mount round shaped
bunker, selectable CCT, IP54 with PIR sensor

Application

A robust solution for residential and
apartment interior or (covered eave)
exterior utility spaces

Design Specifications

- Durable white or black polycarbonate
body, opal polycarbonate diffuser
- Integral control gear, 15 watt with PIR
sensor control, fixed 30 seconds ON
with motion trigger
- Detection distance 7 metres diameter at
2.5hm, daylight threshold < 20 lux
- CRI >80, 1350/1450/1400lm, selectable CCT
- Quick connect installation design
- Robust IK06 protection, wall or ceiling mount

Performance

- Dimmable - No




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SL7272TC/WH/S	240/50	15	1350/1450/1400	3000/4000/6500	110°	White	Ø 180 x 66
SL7272TC/BK/S	240/50	15	1350/1450/1400	3000/4000/6500	110°	Black	Ø 180 x 66




Dimensions

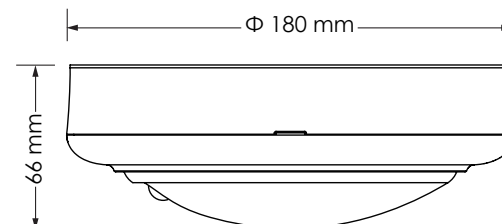

Photometric Data

SL7272TC/WH/S at 4000K

Unit: cd C0/C180 C90/C270





TC SELECTABLE COLOUR

COOPER SE7081TC - 16W


16 watt, IP65 LED commercial
bunker luminaire, selectable CCT,
IK10 rated, ceiling or wall mount

Application

A decorative architectural solution
for commercial exteriors



Dimensions

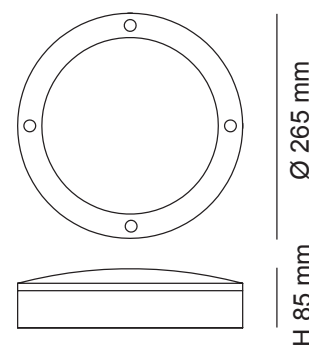

Design Specifications

- Robust die-cast aluminium body,
durable black or silver powder coat finish
- Stainless steel allen screws
- High efficiency LED optics
- Integral non-dimmable LED driver
- Selectable CCT 3000 / 4000 / 5700K

Performance


- Sensor - optional microwave



Photometric Data

SE7081TC at 3000K

Unit: cd C0/C180 — C90/C270

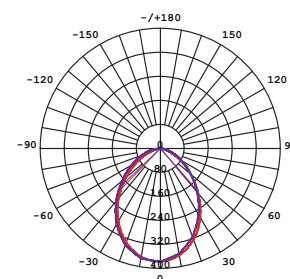

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7081TC/BK	240/50	16	1100/1150/1100	3000/4000/5700	100°	Black	Ø 265 x 85
SE7081TC/SL	240/50	16	1100/1150/1100	3000/4000/5700	100°	Silver	Ø 265 x 85



TC SELECTABLE COLOUR

COOPER SE7082TC - 16W


16 watt, IP65 LED commercial
bunker luminaire, selectable CCT,
IK10 rated, ceiling or wall mount

Application

A decorative architectural solution
for commercial exteriors



Dimensions

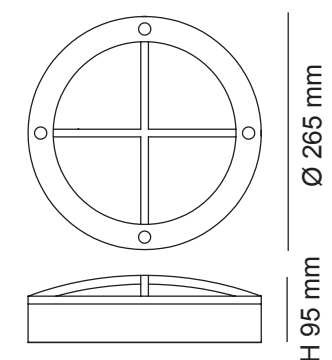

Design Specifications

- Robust die-cast aluminium body,
durable black powder coat finish
- Stainless steel allen screws
- High efficiency LED optics
- Integral non-dimmable LED driver
- Selectable CCT 3000 / 4000 / 5700K

Performance


- Sensor - optional microwave



Photometric Data

SE7082TC at 3000K

Unit: cd C0/C180 — C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7082TC/BK	240/50	16	1100/1150/1100	3000/4000/5700	100°	Black	Ø 265 x 95

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

COOPER SE7083TC - 23W

23 watt, IP65 LED commercial
bunker luminaire, selectable CCT,
IK10 rated, ceiling or wall mount

Application

A decorative architectural solution
for commercial exteriors

Design Specifications


- Robust die-cast aluminium body,
durable black or silver powder coat finish
- Stainless steel allen screws
- High efficiency LED optics
- Integral non-dimmable LED driver
- Selectable CCT 3000 / 4000 / 5700K
- Optional Emergency models available

Performance

- Sensor - optional microwave
- Dimming - optional trailing edge




Dimensions

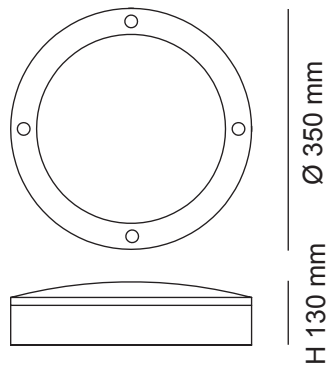

Photometric Data

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7083TC/BK	240/50	23	1400/1500/1500	3000/4000/5700	100°	Black	Ø 350 x 130
SE7083TC/SL	240/50	23	1400/1500/1500	3000/4000/5700	100°	Silver	Ø 350 x 130



TC SELECTABLE COLOUR

COOPER SE7084TC - 23W

23 watt, IP65 LED commercial
bunker luminaire, selectable CCT,
IK10 rated, ceiling or wall mount

Application

A decorative architectural solution
for commercial exteriors

Design Specifications


- Robust die-cast aluminium body,
durable black or silver powder coat finish
- Stainless steel allen screws
- High efficiency LED optics
- Integral non-dimmable LED driver
- Selectable CCT 3000 / 4000 / 5700K
- Optional Emergency models available

Performance

- Sensor - optional microwave
- Dimming - optional trailing edge




Dimensions

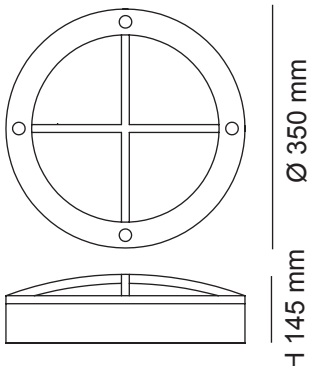

Photometric Data

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7084TC/BK	240/50	23	1400/1500/1500	3000/4000/5700	100°	Black	Ø 350 x 145
SE7084TC/SL	240/50	23	1400/1500/1500	3000/4000/5700	100°	Silver	Ø 350 x 145

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

COOPER III
SE7191TC/BK - 12W

Decorative 12 watt round profile IP65 architectural LED wall or ceiling mount luminaire, with selectable CCT

Application

A decorative architectural solution for residential & commercial interior or exterior spaces

Design Specifications


- Selectable CCT 3000K / 4000K / 5700K
- Stylish black finish
- Integral non-dimmable LED control gear, 12 watt
- Robust PC body profile and diffuser
- High efficiency LED optics

Performance

- Non-dimmable




Dimensions

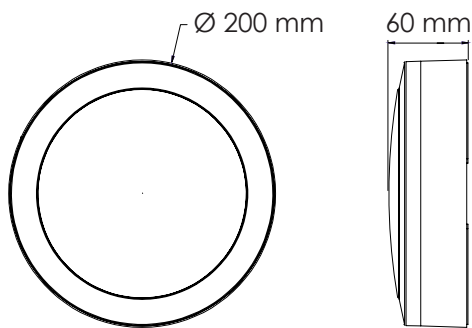

Photometric Data

SE7191TC/BK at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SE7191TC/BK	240/50	12	1050/1150/1100	3000/4000/5700	> 80	Black	Ø200 x H60



TC SELECTABLE COLOUR

COOPER III
SE7192TC/BK - 18W

Decorative 18 watt round profile IP65 architectural LED wall or ceiling mount luminaire, with selectable CCT

Application


A decorative architectural solution for residential & commercial interior or exterior spaces

Design Specifications

- Selectable CCT 3000K / 4000K / 5700K
- Stylish black finish
- Integral non-dimmable control gear, 18 watt
- Robust PC body profile and diffuser
- High efficiency LED optics
- Optional (wall mount) eyelid cover to order, code SE7192TC/BK/P
- Optional Emergency models available


Performance

- Non-dimmable

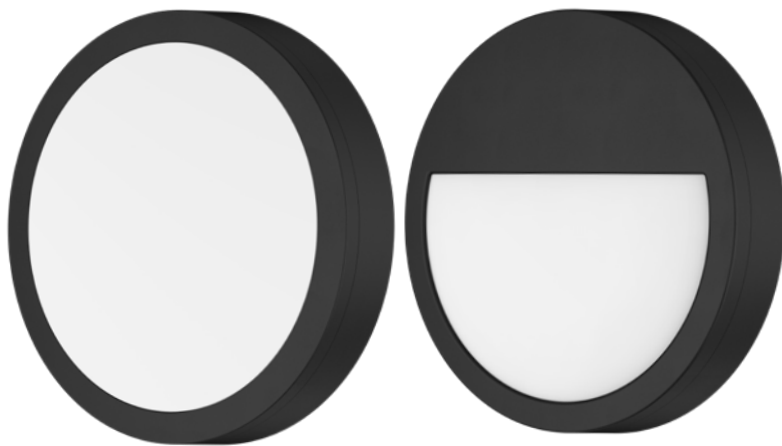

Optional eyelid


Dimensions

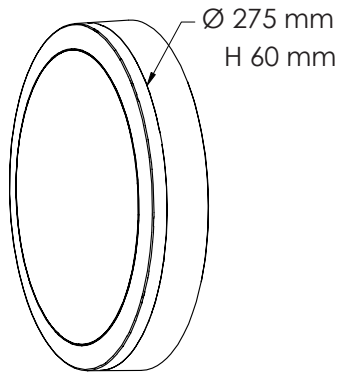

Photometric Data

SE7192TC/BK at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SE7192TC/BK	240/50	18	1600/1800/1750	3000/4000/5700	> 80	Black	Ø275 x H60

For terms of catalogue data use, refer to INDEX



**MEMPHIS ROUND
SL9719RD - 22W**

Vandal resistant, IP65 LED round profile,
wall or ceiling mount luminaire, IK10 rated

Application

A robust solution for industrial and
commercial spaces

Design Specifications


- Die-cast aluminium body with a frosted polycarbonate diffuser
- Stainless steel allen screws
- High efficiency LED optics
- Integral non-dimmable LED driver
- Designed with multi access rear or side conduit entry points
- Non-dimmable corridorSTANDBY options
- Product selections compliant to AS/NZS2293 Emergency Lighting & Exit Signs are located in the exterior emergency section of this catalogue.

Performance

- Dimmable - optional, trailing edge, DALI/DSI
- Sensor - optional, microwave




Dimensions

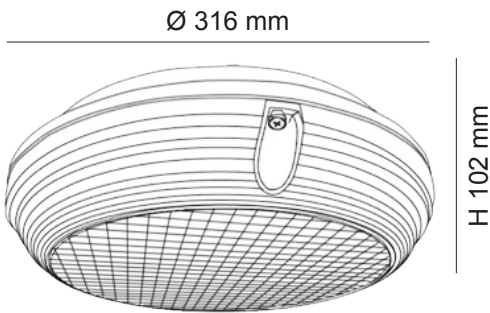

Photometric Data SL9719RD at 4000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
SL9719RD	240/50	22	1700	4000	> 80	Optional	White
SL9719RD/C	240/50	22	1700	4000	> 80	No	White



Strathfield Station underpass - NSW
Memphis Square



MEMPHIS SQUARE
SL9719SQ - 22W

Vandal resistant, IP65 LED square profile,
wall or ceiling mount luminaire, IK10 rated

Application

A robust solution for industrial and
commercial spaces

Design Specifications


- Die-cast aluminium body with a frosted polycarbonate diffuser
- Stainless steel allen screws
- High efficiency LED optcis
- Integral non-dimmable LED driver
- Designed with multi access rear or side conduit entry points
- Non-dimmable corridorSTANDBY options
- Product selections compliant to AS/NZS2293 Emergency Lighting & Exit Signs are located in the exterior emergency section of this catalogue

Performance

- Dimmable - optional, trailing edge, DALI/DSI
- Sensor - optional, microwave




Dimensions

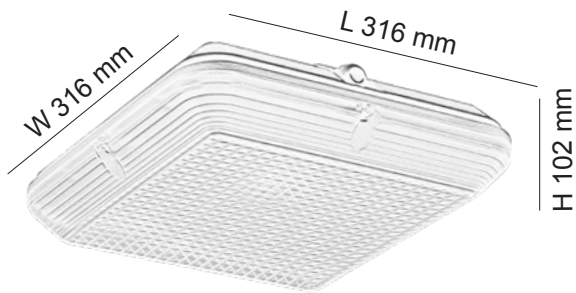

Photometric Data SL9719SQ at 4000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimmable	Fitting Colour
SL9719SQ	240/50	22	1700	4000	> 80	Optional	White
SL9719SQ/C	240/50	22	1700	4000	> 80	No	White



REC-BUNKER
SE7087L - 18W

Vandal resistant, IP54 LED bunker
ceiling mount luminaire, IK10 rated

Application

A reliable solution for commercial
or industrial utility spaces

Design Specifications


- Robust die-cast aluminium body
- Durable white powder coat finish
- Stainless steel allen screws
- High efficiency LED optics, beam distribution 90°
- Integral non-dimmable LED driver
- UV stabilised opal polycarbonate diffuser and silicone gasket

Performance

- Dimmable - optional, trailing edge




Dimensions

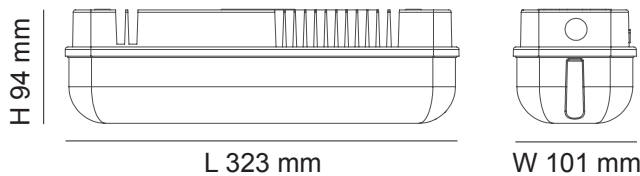

Photometric Data SE7087L at 4000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
SE7087L	240/50	18	1450	4000	> 80	90°	Optional	White

For terms of catalogue data use, refer to INDEX

SMARTER LIGHTING CHOICES



🏠 SAL National Pty Ltd - 40 Biloela St, Villawood NSW 2163

☎ + 61 2 9723 3099

🌐 www.sal.net.au

✉ info@sal.net.au

🏠 VICT/TAS - 46/48 Keys Road Moorabbin VIC 3189

☎ + 61 3 9532 3168

✉ info@sal.net.au

🏠 QLD - 36 Whitelaw Place Richlands QLD 4077

☎ + 61 7 3879 5999

✉ info@sal.net.au

🏠 SA/NT - 79 Frederick St, Welland SA 5009

☎ +61 8 7084 1958

✉ info@sal.net.au

🏠 WA - 29 Beringarra Avenue Malaga WA 6090

☎ +61 8 9248 7458

✉ info@sal.net.au



2026/28