

SMARTER LIGHTING CHOICES



SAL Lighting a Smarter Future  



2026/28





An expansive range of LED exterior emergency luminaires compliant to AS/NZS 2293.



TC SELECTABLE COLOUR

MULTI POWER

MAINTAINED

NON-MAINTAINED



BARRACUDA
SL9723 TC/MP/EM – 12W/40W

MAINTAINED OR NON-MAINTAINED, LED emergency weatherproof batten, 12/40 watt models, with selectable CCT and power

Application

Commercial or industrial ceiling or suspended mount applications requiring IP66 and IK10 performance


Design Specifications

- Selectable CCT 3000K /4000K /5700K
- Rounded profile design, robust aluminium body and UV stabilized polycarbonate diffuser
- Integral flickerCONTROLLED non-dimmable, multi-power LED driver, 12/15/18/21 watt or 24/30/35/40 watt models
- Secure stainless steel fasteners for the diffuser retention, optional accessories - M6 304 stainless steel security screws to fit a T30 TORX key (SL9723TP/SCREW)
- Installation types - Surface mount (standard), Suspended (two off, SSY1512 wire suspension kits are required)
- Compliant to AS/NZS 2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO₄ battery technology. Emergency spacing class - (20W) D63@C0, D40@C90, (40W) D63@C0, D32@C90.



Photometric Data SL9723/20TC/MP/EM at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL9723/20TC/MP/EM	240/50	12	1350/1450/1400	> 80	120°	Grey	698 x 137 x 115
		15	1700/1800/1750				
		18	2000/2150/2100				
		21	2300/2500/2400				
SL9723/40TC/MP/EM	240/50	24	2800/2950/2900	> 80	120°	Grey	1306 x 137 x 115
		30	3450/3650/3550				
		35	4050/4350/4200				
		40	4600/5000/4800				

For terms of catalogue data use, refer to INDEX



COOPER EM
SE7083TC/EM - 23W

MAINTAINED OR NON-MAINTAINED,
23 watt, LED commercial bunker
luminaire, wall or ceiling mount, IK10
rated with selectable CCT, IP65

Application

A decorative architectural solution
for commercial exteriors

Design Specifications


- Robust die-cast aluminium body, UV stabilised opal polycarbonate diffuser
- Durable black or silver powder coat finish
- Stainless steel allen screws
- High efficiency LED optics, with selectable CCT
- Integral non-dimmable LED driver
- Compliant to AS/NZS 2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO₄ battery technology. Emergency spacing classification D25@C0

Performance

- Dimmable - Optional
- Dimmer Type - Trailing edge
- In Built Sensor - Optional
- Sensor Type - Microwave




Dimensions

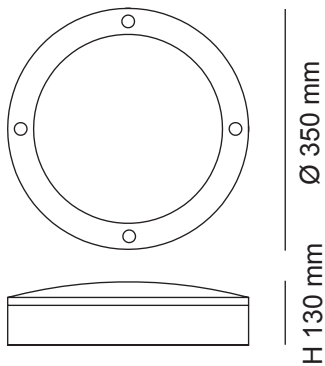

Photometric Data SE7083TC/EM at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7083TC/EM/BK	240/50	23	1400/1500/1500	3000/4000/5700	100°	Black	Ø 350 x 130
SE7083TC/EM/SL	240/50	23	1400/1500/1500	3000/4000/5700	100°	Silver	Ø 350 x 130



COOPER EM
SE7084TC/EM - 23W

MAINTAINED OR NON-MAINTAINED,
23 watt, LED decorative commercial
bunker luminaire, wall or ceiling mount,
IK10 rated with selectable CCT, IP65

Application

A decorative architectural solution
for commercial exteriors

Design Specifications


- Robust die-cast aluminium body with a cross louvre frame, durable black or silver powder coat finish
- Stainless steel allen screws
- High efficiency LED optics with selectable CCT
- Integral non-dimmable LED driver
- UV stabilized opal polycarbonate diffuser
- Compliant to AS/NZS 2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO₄ battery technology. Emergency spacing classification D25@C0

Performance

- Dimmable - Optional
- Dimmer Type - Trailing edge
- In Built Sensor - Optional
- Sensor Type - Microwave




Dimensions

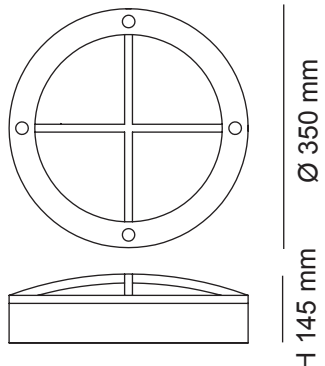

Photometric Data SE7084TC/EM at 3000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SE7084TC/EM/BK	240/50	23	1400/1500/1500	3000/4000/5700	100°	Black	Ø 350 x 145
SE7084TC/EM/SL	240/50	23	1400/1500/1500	3000/4000/5700	100°	Silver	Ø 350 x 145

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR
MAINTAINED
NON-MAINTAINED

COOPER III EM SE7192TC/EM - 18W

MAINTAINED OR NON-MAINTAINED,
decorative, vandal resistant 18 watt
round profile, LED wall or ceiling mount
luminaire, IK10 with selectable CCT, IP65

Application

A decorative architectural solution
for residential & commercial interior
or exterior spaces

Design Specifications

- Selectable CCT 3000K / 4000K / 5700K
- Stylish black finish
- Integral non-dimmable control gear, 18 watt
- Robust PC body and diffuser profile
- High efficiency LED optics
- Compliant to AS/NZS 2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO₄ battery technology
- Optional (wall mount) eyelid cover to order, code SE7192TC/BK/P

Performance

- Non-dimmable




Technical Specifications

Model No.	Input (V)/(Hz)	Maintained Power (W)	Emergency Classification	CCT (K)	Lumens at Maint. PWR	Fitting Colour
SE7192TC/BK/EM	240/50	18	D20@C0	3000/4000/5700	1800lm	Black




Dimensions

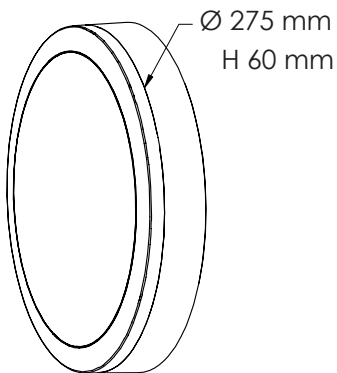

Photometric Data

Unit: cd C0/C180 C90/C270



TC SELECTABLE COLOUR
MULTI POWER
MAINTAINED
NON-MAINTAINED

KEW II EM SL9721TC/MP/EM - 11W/40W

MAINTAINED OR NON-MAINTAINED, LED
emergency weatherproof batten, IP65 LED
11/40 watt with selectable power and CCT

Application

Multi-purpose ceiling mount or suspended,
commercial or industrial applications

Design Specifications

- Vandal resistant design, robust polycarbonate body and UV stabilized polycarbonate diffuser
- 301 Stainless steel clips & screws, IP65, IK08, sensor and emergency options
- Selectable CCT 3000K / 4000K / 5700K
- Operating temperature 0°C to +40°C
- Compliant to AS/NZS 2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO₄ battery technology
- Integral, non-dimmable flickerCONTROLLED LED driver
- Selectable power choices; 20W - 11/14/17/20 and 40W - 22/28/34/40

Technical Specifications

Model No.	Input (V)/(Hz)	Maintained Power (W)	Emergency Classification	Lumens at Maint. PWR	Dimensions (L x W x H mm)
SL9721/20TC/MP/EM	240/50	11	D63@C0, D40@C90	1450/1450/1450	618 x 116 x 74
		14		1850/1850/1800	
		17		2250/2250/2200	
		20		2550/2550/2500	
SL9721/40TC/MP/EM	240/50	22	D63@C0, D40@C90	2900/3000/3150	1215 x 116 x 74
		28		3600/3750/3900	
		34		4350/4500/4670	
		40		5050/5250/5400	

SL9721/20TC/MP/EM




SL9721/40TC/MP/EM


Photometric Data (power on)

Unit: cd C0/C180 C90/C270

SL9721/20TC/MP/EM at 3000K



SL9721/40TC/MP/EM at 5000K





MAINTAINED

NON-MAINTAINED

MEMPHIS ROUND EM SL9719RD/EM - 22W

MAINTAINED OR NON-MAINTAINED,
vandal resistant, LED round profile, wall
or ceiling mount luminaire, IK10, IP65

Application

A robust solution for industrial and
commercial spaces


Design Specifications

- Die-cast aluminium body, frosted polycarbonate diffuser, silicone gasket
- Stainless steel allen screws
- High efficiency LED optics
- Integral non-dimmable LED driver
- Compliant to AS/NZS 2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO₄ battery technology
- Optional (non-dim) corridorSTANDBY function available



Dimensions

Ø 316 mm

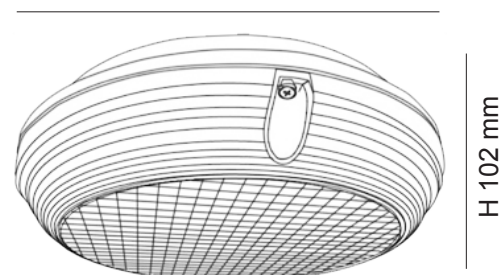

Performance


- Dimmable - optional, trailing edge, 1-10V, DALI / DSI



Photometric Data

SL9719RD/EM at 4000K

Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Maintained Power (W)	Emergency Classification	Lumens at Maint. PWR	CCT (K)	Fitting Colour
SL9719RD/EM	240/50	22	D32@C0	1700lm	4000	White



MAINTAINED

NON-MAINTAINED

MEMPHIS SQUARE EM SL9719SQ/EM - 22W

MAINTAINED OR NON-MAINTAINED,
vandal resistant, LED square profile, wall
or ceiling mount luminaire, IK10, IP65

Application


A robust solution for industrial and
commercial spaces

Design Specifications

- Die-cast aluminium body, frosted polycarbonate diffuser, silicone gasket
- Stainless steel allen screws
- High efficiency LED optics
- Integral non-dimmable LED driver
- Compliant to AS/NZS 2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO₄ battery technology
- Optional (non-dim) corridorSTANDBY function available



Dimensions

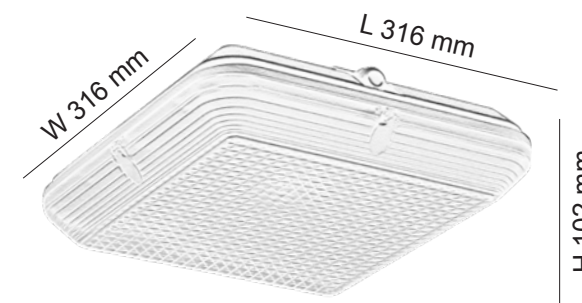

Performance


- Dimmable - optional, trailing edge, 1-10V, DALI / DSI



Photometric Data

SL9719SQ/EM at 4000K


Unit: cd C0/C180 C90/C270



Technical Specifications

Model No.	Input (V)/(Hz)	Maintained Power (W)	Emergency Classification	Lumens at Maint. PWR	CCT (K)	Fitting Colour
SL9719SQ/EM	240/50	22	D32@C0, D32@C90	1700lm	4000	White

For terms of catalogue data use, refer to INDEX



SOL-ECO
SL9725 EM - 20W/40W

MAINTAINED OR NON-MAINTAINED, LED emergency weatherproof batten, 20 or 40 watt models, with selectable CCT and power, IP65

Application

Multi-purpose, ceiling or suspension mount commercial or industrial applications

Design Specifications

- Vandal resistant design, robust PC body and UV stabilized polycarbonate diffuser, fitted polycarbonate clips
- Integral non-dimmable LED driver
- Compliant to AS/NZS 2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO₄ battery technology
- Installation types - Surface mount (standard), if Suspended (two off, SS11512 wire suspension kits are required)

Performance

- Dimmable - No





Technical Specifications

Model No.	Input (V)/(Hz)	Maintained Power (W)	Emergency Classification	CCT (K)	Dimensions (L x W x H mm)
SL9725/20EM	240/50	Max. 20	D25@C0, D50@C90	3000/4000/5700	653 x 99 x 76
SL9725/40EM	240/50	Max. 40	D25@C0, D50@C90	3000/4000/5700	1253 x 99 x 76



Photometric Data (power on)

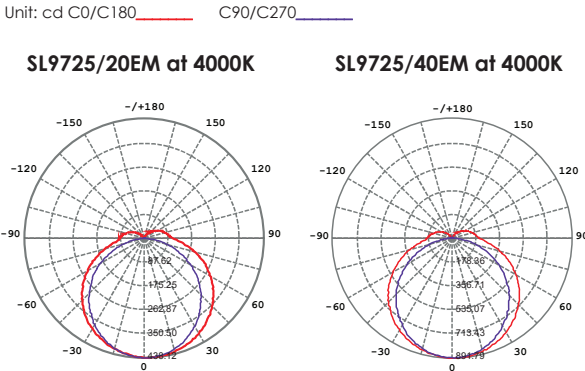

SOL
SL9726 TC/EM - 20W/50W

MAINTAINED OR NON-MAINTAINED, premium, IP65 LED weatherproof batten with selectable CCT and power

Application

Commercial or industrial utility applications requiring IP65 and IK08 performance

Design Specifications

- Selectable power and CCT 3000/4000/6000K
- Vandal resistant design, robust PC body, UV stabilized polycarbonate diffuser, fitted stainless steel clips & screws
- Integral non-dimmable LED driver
- Optional (non-dim) corridorSTANDBY function available for 40 watt EM
- Compliant to AS/NZS 2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO₄ battery technology
- Accessories included - PVC cable glands and suspension brackets. Installation types - Surface mount (standard) or if Suspended (a suspension kit is required). DALI option available.

Performance

- Dimmable - Optional




Technical Specifications

Model No.	Input (V)/(Hz)	Maintained Power (W)	Emergency Classification	Lumens at Maint. PWR	CCT (K)	Dimensions (L x W x H mm)
SL9726/20TC/EM	240/50	Max.20	D32@C0, D25@C90	2000lm	3000/4000/6000	642 x 118 x 77
SL9726/40TC/EM	240/50	Max.42	D40@C0, D40@C90	4500lm	3000/4000/6000	1251 x 118 x 77
SL9726/50TC/EM	240/50	Max.50	D40@C0, D32@C90	6070lm	3000/4000/6000	1551 x 118 x 77



Photometric Data

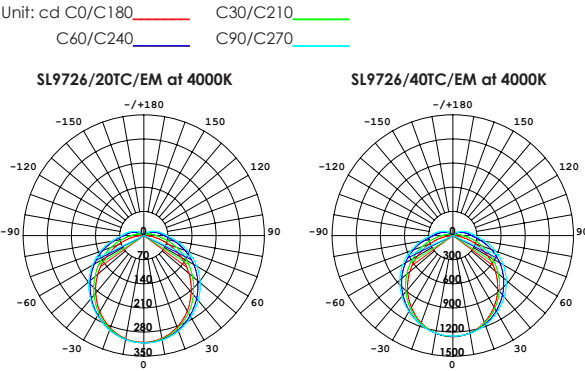

SMARTER LIGHTING CHOICES



 SAL National Pty Ltd - 40 Biloela St, Villawood NSW 2163

 + 61 2 9723 3099

 www.sal.net.au

 info@sal.net.au

 VICT/TAS - 46/48 Keys Road Moorabbin VIC 3189

 + 61 3 9532 3168

 info@sal.net.au

 QLD - 36 Whitelaw Place Richlands QLD 4077

 + 61 7 3879 5999

 info@sal.net.au

 SA/NT - 79 Frederick St, Welland SA 5009

 +61 8 7084 1958

 info@sal.net.au

 WA - 29 Beringarra Avenue Malaga WA 6090

 +61 8 9248 7458

 info@sal.net.au



2026/28