

SMARTER LIGHTING CHOICES



SAL Lighting a Smarter Future  



2026/28





An expansive range of small, medium, and large exterior LED floodlights, with an extensive selection of power and sensor control options.



Tradestar SE7169



STARGEM II
SE7060NDL/BK - 2 X 10W

2 x 10 watt wall mount LED
floodlight, IP54

Application

A versatile security solution for
residential exterior spaces

Design Specifications



- Independently adjustable heads
- Robust polycarbonate base and housing
- Opal polycarbonate diffuser, beam distribution 100°
- High efficiency LED optics
- Non-dimmable LED driver
- Double insulated

Performance

- Non-dimmable



Dimensions

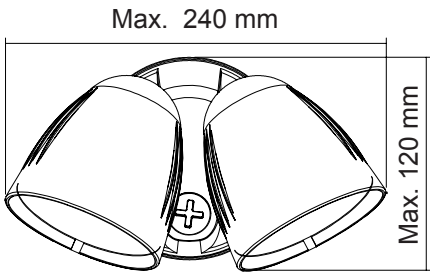

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Sensor	Fitting Colour
SE7060NDL/BK	240/50	2 x 10	2 x 800	5000	> 80	100°	No	Black



STARGEM II WITH SENSOR
SES7060NDL/BK - 2 X 10W

2 x 10 watt wall mount LED
floodlight, IP54 with PIR sensor

Application

A versatile security solution for
residential exterior spaces

Design Specifications

- Independently adjustable heads
- Robust polycarbonate base and housing
- Opal polycarbonate diffuser, beam distribution 100°
- High efficiency LED optics, non-dimmable LED driver
- Integral infrared motion sensor with override function
- Installation height max 2.5hm
- Double insulated

Performance

- Non-dimmable
- Sensor Type - PIR



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Sensor	Fitting Colour
SES7060NDL/BK	240/50	2 x 10	2 x 800	5000	> 80	100°	Yes	Black


Technical Specifications

Power Source	Power	Detection Range	Detection Angle	Detection Motion Speed	Working Temperature	Time Setting	Lux Threshold
240V 50Hz	0.45W (Idle 0.1W)	12m@2.5m height	120°	0.6~1.5 m/s	-10~40°C	10s~4min	10~2000 Lux

For terms of catalogue data use, refer to INDEX



Dimensions

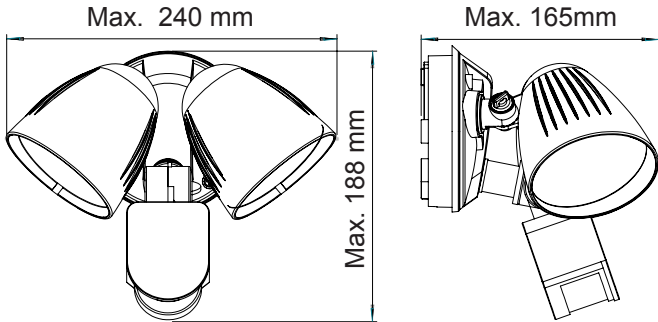



TC SELECTABLE COLOUR

STARGEM III SE7080/1TC - 15W

15 watt wall mounted LED floodlight with selectable CCT, IP65.

STARGEM III SE7080/2TC - 2 X 15W

2 x 15 watt IP65 wall mounted LED floodlight with selectable CCT

Application

A stylish solution for residential exterior spaces

Design Specifications

- Robust adjustable, aluminium optical assembly
- Durable polycarbonate mounting base
- Opal polycarbonate diffuser, beam distribution 100° per head
- Selectable CCT 3000K/4000K/5700K
- High efficiency LED optics, integral non-dimmable LED driver

Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SE7080/1TC/BK	240/50	15	1200/1300/1250	3000/4000/5700	> 80	100°	Black
SE7080/1TC/WH	240/50	15	1200/1300/1250	3000/4000/5700	> 80	100°	White
SE7080/2TC/BK	240/50	2 x 15	2 x 1200/1300/1250	3000/4000/5700	> 80	100°	Black
SE7080/2TC/WH	240/50	2 x 15	2 x 1200/1300/1250	3000/4000/5700	> 80	100°	White




SE7080/1TC/WH




SE7080/2TC/BK

Dimensions

SE7080/1TC

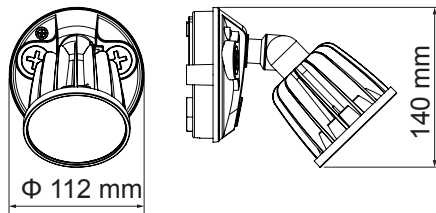

SE7080/2TC

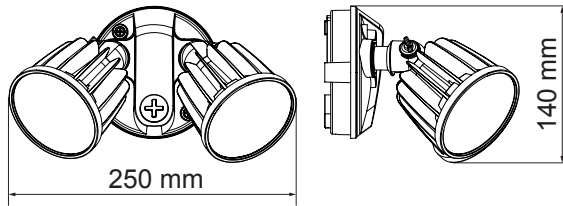

TC SELECTABLE COLOUR

STARGEM III WITH SENSOR SES7080/1TC - 15W

15 watt wall mounted LED floodlight with selectable CCT, IP54 and PIR sensor

STARGEM III WITH SENSOR SES7080/2TC - 2 X 15W

2 x 15 watt IP54 wall mounted LED floodlight with selectable CCT and PIR sensor

Application

A stylish solution for residential exterior spaces, great for security

Design Specifications

- Robust adjustable, aluminium optical head
- Durable polycarbonate mounting base
- Opal polycarbonate diffuser, beam distribution 100° per head
- Selectable CCT 3000K/4000K/5700K
- High efficiency LED optics, integral non-dimmable LED driver
- Integral PIR motion sensor, detection distance 12m at 2.5hm, detection angle 120°, manual over-ride function, time and light level adjustments see installation instructions

Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SES7080/1TC/BK	240/50	15	1200/1300/1250	3000/4000/5700	> 80	100°	Black
SES7080/1TC/WH	240/50	15	1200/1300/1250	3000/4000/5700	> 80	100°	White
SES7080/2TC/BK	240/50	2 x 15	2 x 1200/1300/1250	3000/4000/5700	> 80	100°	Black
SES7080/2TC/WH	240/50	2 x 15	2 x 1200/1300/1250	3000/4000/5700	> 80	100°	White




SES7080/1TC/WH




SES7080/2TC/BK

Dimensions

SES7080/1TC

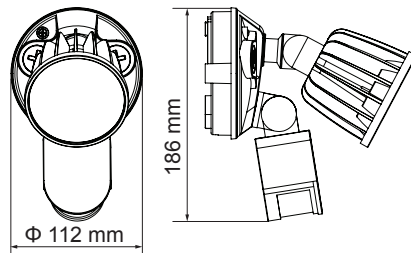

SES7080/2TC

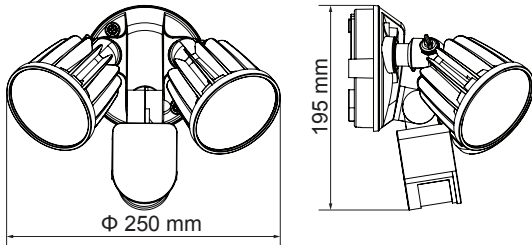



TC SELECTABLE COLOUR

STARGEM IV SE7070/1TC - 12W

12 watt wall mounted LED floodlight with selectable CCT, IP54.

STARGEM IV SE7070/2TC - 2 X 12W

2 x 12 watt IP65 wall mounted LED floodlight with selectable CCT

Application

A stylish solution for residential exterior spaces

Design Specifications

- Robust adjustable aluminium head profile
- Durable polycarbonate mounting base with quick connect termination
- Tempered glass lens, beam distribution 120° per head
- Selectable CCT 3000K / 4000K / 5700K
- High efficiency LED optics, Integral non-dimmable LED driver

Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SE7070/1TC/BK	240/50	12	950/1150/1050	3000/4000/5700	> 80	120°	Black
SE7070/1TC/WH	240/50	12	950/1150/1050	3000/4000/5700	> 80	120°	White
SE7070/2TC/BK	240/50	2 x 12	2 x 950/1150/1050	3000/4000/5700	> 80	120°	Black
SE7070/2TC/WH	240/50	2 x 12	2 x 950/1150/1050	3000/4000/5700	> 80	120°	White




SE7070/1TC/WH





SE7070/2TC/BK


Dimensions



SE7070/1TC



SE7070/2TC



TC SELECTABLE COLOUR

STARGEM IV WITH PIR SENSOR SES7070/1TC - 12W

12 watt wall mounted LED floodlight with selectable CCT, IP54 and PIR sensor

STARGEM IV WITH PIR SENSOR SES7070/2TC - 2 X 12W

2 x 12 watt IP54 wall mounted LED floodlight with selectable CCT and PIR sensor

Application

A stylish solution for residential exterior spaces, great for security

Design Specifications

- Robust adjustable aluminium head profile
- Durable polycarbonate mounting base with quick connect termination
- Tempered glass lens, beam distribution 120° per head
- Selectable CCT 3000K / 4000K / 5700K
- Integral non-dimmable LED driver
- Integral PIR motion sensor, detection distance 10m at 2.0hm, detection angle 120°, manual over-ride function, time and light level adjustments, see installation instructions

Performance

- Non-dimmable



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SES7070/1TC/BK	240/50	12	900/1100/1000	3000/4000/5700	> 80	120°	Black
SES7070/1TC/WH	240/50	12	900/1100/1000	3000/4000/5700	> 80	120°	White
SES7070/2TC/BK	240/50	2 x 12	2 x 900/1100/1000	3000/4000/5700	> 80	120°	Black
SES7070/2TC/WH	240/50	2 x 12	2 x 900/1100/1000	3000/4000/5700	> 80	120°	White




SES7070/1TC/WH





SES7070/2TC/BK


Dimensions



SES7070/1TC



SES7070/2TC





TC SELECTABLE COLOUR

STARLIGHT SPK1000TC/BK - 12W

12 watt IP54 LED floodlight,
with selectable CCT lamps

STARLIGHT SPK2000TC/BK - 2 X 12W

2 x 12 watt IP54 LED floodlight,
with selectable CCT PAR lamps

Application

An economical security solution for
residential exterior spaces

Design Specifications

- Independently adjustable heads
- UV stabilized plastic body
- E27 lamp base
- Selectable CCT PAR38 LED lamp/s included, beam distribution 100° per lamp

Performance

- Non-dimmable




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SPK1000TC/BK	240/50	12	1500/1700/1500	3000/4000/6000	> 80	100°	Black
SPK2000TC/BK	240/50	2 x 12	2 x 1500/1700/1500	3000/4000/6000	> 80	100°	Black




Dimensions

SPK1000TC/BK

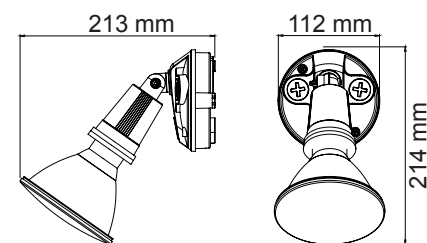

SPK2000TC/BK

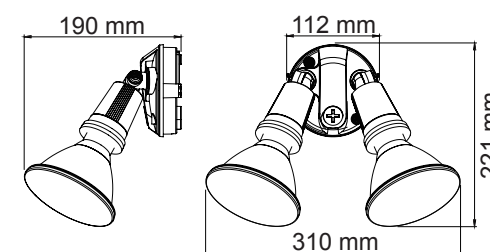

TC SELECTABLE COLOUR

STARLIGHT WITH PIR SENSOR SPSK1000TC/BK - 12W

12 watt IP54 LED floodlight, with
selectable CCT lamps and PIR sensor

STARLIGHT WITH PIR SENSOR SPSK2000TC/BK - 2 X 12W

2 x 12 watt IP54 LED floodlight with
selectable CCT PAR lamps and PIR sensor

Application

An economical security solution for residential
exterior spaces, requiring sensor control

Design Specifications

- Independently adjustable heads
- UV stabilized plastic body, E27 lamp base
- Selectable CCT PAR38 LED lamp/s included, beam distribution 100° per lamp
- Integral infrared motion sensor with override function, installation height 1.5 - 3.5m

Performance

- Non-dimmable
- Sensor Type - PIR



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SPSK1000TC/BK	240/50	12	1500/1700/1500	3000/4000/6000	> 80	100°	Black
SPSK2000TC/BK	240/50	2 x 12	2 x 1500/1700/1500	3000/4000/6000	> 80	100°	Black

Technical Specifications


Power Source	Power	Detection Range	Detection Angle	Detection Motion Speed	Working Temperature	Time Setting	Lux Threshold
240V 50Hz	0.45W (Idle 0.1W)	12m@2.5m height	120°	0.6~1.5 m/s	0~40°C	10s~4min	10~2000 Lux

For terms of catalogue data use, refer to INDEX




Dimensions

SPSK1000TC/BK

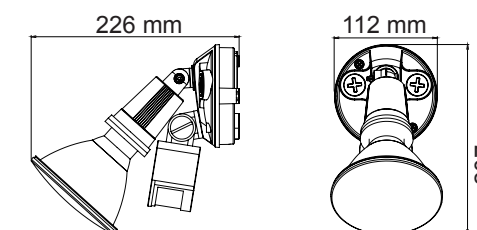

SPSK2000TC/BK

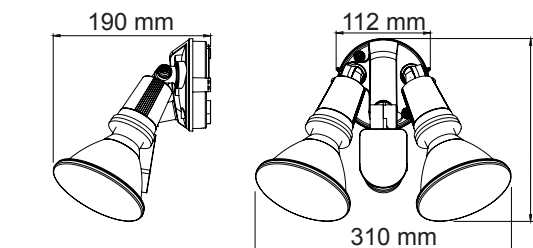



TC SELECTABLE COLOUR

STARPAD II
SE7071 TC2 - 15W/100W

15/100 watt IP65 LED floodlight
with selectable CCT

Application

A versatile floodlight solution for residential
exterior spaces

Design Specifications

- Robust die-cast aluminium body,
IK07 rated
- Durable black, silver or white
powder coat finish
- Textured tempered glass front cover
- High efficiency LED optics, CRI >80,
selectable CCT 3000K/4000K/5000K
- Non-dimmable LED driver
- High performance aluminium reflector,
beam distribution 100°
- Nickel plated copper cable gland with
600 mm 3 core rubber flex (15-30 watt
models), 800mm for (50-100 watt models)

Performance

- Non-dimmable




SE7071/15TC2




Photometric Data

Unit: cd C0/C180 C90/C270

SE7071/15TC2BK at 3000K



SE7071/100TC2BK at 5000K



TC SELECTABLE COLOUR



SE7071/100TC2

SE7071/50TC2

SE7071/30TC2



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Fitting Colour	Dimensions (L x W x H mm)	Mass (Kg)
SE7071/15TC2WH	240/50	15	1875/2100/1950	3000/4000/5000	White	154 x 36 x 100	0.5
SE7071/15TC2SL	240/50	15	1875/2100/1950	3000/4000/5000	Silver	154 x 36 x 100	0.5
SE7071/15TC2BK	240/50	15	1875/2100/1950	3000/4000/5000	Black	154 x 36 x 100	0.5
SE7071/30TC2WH	240/50	30	3750/4200/3900	3000/4000/5000	White	207 x 36 x 135	0.8
SE7071/30TC2SL	240/50	30	3750/4200/3900	3000/4000/5000	Silver	207 x 36 x 135	0.8
SE7071/30TC2BK	240/50	30	3750/4200/3900	3000/4000/5000	Black	207 x 36 x 135	0.8
SE7071/50TC2WH	240/50	50	6250/7000/6500	3000/4000/5000	White	261 x 39 x 171	1.3
SE7071/50TC2SL	240/50	50	6250/7000/6500	3000/4000/5000	Silver	261 x 39 x 171	1.3
SE7071/50TC2BK	240/50	50	6250/7000/6500	3000/4000/5000	Black	261 x 39 x 171	1.3
SE7071/100TC2WH	240/50	100	12500/14000/13000	3000/4000/5000	White	343 x 42 x 201	2.5
SE7071/100TC2SL	240/50	100	12500/14000/13000	3000/4000/5000	Silver	343 x 42 x 201	2.5
SE7071/100TC2BK	240/50	100	12500/14000/13000	3000/4000/5000	Black	343 x 42 x 201	2.5

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

TRADEGLOW
SE7171S TC - 15W/100W

15/100 watt IP65 LED floodlight with
selectable CCT and MW sensor functions

Application

A versatile floodlight solution for
residential exterior spaces

Design Specifications

- Robust die-cast aluminium body, IK07 rated, four versatile sizes
- Durable black, RAL9017 powder coat finish
- Textured tempered glass front cover
- High efficiency LED optics 140lm/W, CRI >80
- Selectable CCT 3000K/4000K/5000K
- Non-dimmable LED driver
- High performance aluminium reflector, beam distribution 100°
- Integral MW sensor control
- Optional to order multi-function sensor remote control and override selection

Performance

- Non-dimmable



SE7171S15TC/BK



SE7171S30TC/BK



SE7171S50TC/BK




SE7171S100TC/BK


Photometric Data

Unit: cd C0/C180 C90/C270

SE7171S15TC/BK at 3000K



SE7171S100TC/BK at 5000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Fitting Colour	Dimensions (L x W x H mm)	Mass (Kg)
SE7171S15TC/BK	240/50	15	1800/2100/1875	3000/4000/5000	Black	188 x 154 x 41	0.5
SE7171S30TC/BK	240/50	30	3600/4200/3750	3000/4000/5000	Black	214 x 188 x 41	0.7
SE7171S50TC/BK	240/50	50	6000/7000/6250	3000/4000/5000	Black	269 x 239 x 43	1.1
SE7171S100TC/BK	240/50	100	12000/14000/12500	3000/4000/5000	Black	317 x 271 x 43	1.8

For sensor

Installation Height (m)	Detection Distance (m)	Detection Motion Speed (m/s)	Detection Angle	Sensitivity Setting (m)	Hold Time Setting	Sensor Type
Max. 3	Max. 8	0.5 ~ 1.5	120°	Low: ≈ 3 Medium: ≈ 5 High: ≈ 8	10s/30s/5mins/ 10min/20mins/ 30mins	Microwave

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR



TRADESTAR
SE7169MP TC - 70W/300W

A versatile LED floodlight range with six models ranging from 70 - 300 watt with selectable CCT and power.

Application

Perfect for any exterior space from residential small wattage designs through to high performance commercial applications

Design Specifications

- Integral LED control gear, non-dimmable 70, 100, 150, 200, 250, 300 watt models, with selectable power
- Robust black die-cast aluminium body profile with multi-function angled trunnion bracket, IK08, IP66 protection
- Pre-wired with 1500mm UV rated flex for easy installation
- CRI >80, selectable CCT 3000/4000/5000K
- An impressive 140lm/W optical performance at 4000K

Performance


- Non-dimmable




Photometric Data

Unit: cd C0/C180 C90/C270

SE7169MP70TC at 5000K




SE7169MP300TC at 5000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Dimensions (L x W x H mm)	Mass (Kg)
SE7169MP70TC	240/50	70 53 35	8400/9800/9100 6300/7400/6800 4200/4900/4600	3000/4000/5000	280 x 55 x 246	2.6
SE7169MP100TC	240/50	100 75 50	12000/14000/13000 9000/10500/9800 6000/7000/6500	3000/4000/5000	280 x 55 x 246	2.6
SE7169MP150TC	240/50	150 113 75	18000/21000/19500 13500/15800/14600 9000/10500/9800	3000/4000/5000	310 x 55 x 301	3.8
SE7169MP200TC	240/50	200 150 100	24000/28000/26000 18000/21000/19500 12000/14000/13000	3000/4000/5000	334 x 58 x 304	4.3
SE7169MP250TC	240/50	250 188 125	30000/35000/32500 22500/26200/24400 15000/17500/16300	3000/4000/5000	435 x 63 x 395	7.3
SE7169MP300TC	240/50	300 225 150	36000/42000/39000 27000/31500/29300 18000/21000/19500	3000/4000/5000	435 x 63 x 395	7.9

For terms of catalogue data use, refer to INDEX



TRADESTAR
SE7169MP480NDL - 240W/480W

A versatile and powerful LED floodlight with selectable power, IP66

Application

Perfect for any large exterior space

Design Specifications

- Integral, non-dimmable LED control gear, with selectable power 240/360/480W
- Robust black die-cast aluminium body profile with multi-function angled trunnion bracket
- Pre-wired with 1500mm UV rated flex for easy installation
- CRI >80, CCT 5000K
- A versatile 120° beam distribution as standard, optional beam distributions to order.
- Robust IK08 and IP66 protection, tempered glass visor



Performance


- Non-dimmable



Photometric Data

Unit: cd C0/C180 C90/C270


SE7169MP480NDL at 5000K SE7169MP480NDL/T3S at 5000K

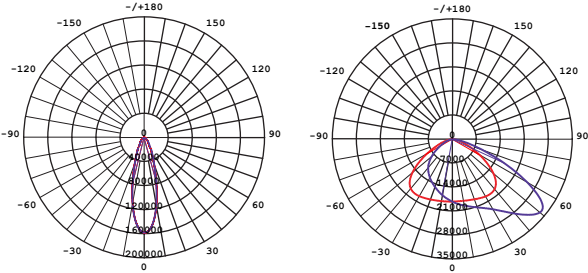

Robust aluminium body

Fitted angled trunnion bracket

High performance breather



Pre-wired with UV rated flex for easy installation

Secure cable gland



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (L x W x H mm)	Mass (Kg)
SE7169MP480NDL	240/50	480 360 240	72000 55000 38000	5000	> 80	Black	407 x 89 x 511	12.5
SE7169MP480NDL/T3S	240/50	480 360 240	73000 54750 36500	5000	> 80	Black	407 x 89 x 511	12.5
SE7169MP480P/CB150	CLAMP MOUNT BRACKET FITS 40-150MM POLE FOR SE7169MP480NDL							
SE7169MP480P/PMA60	POLE MOUNT ADAPTOR 60MM FOR SE7169MP480NDL							
SE7169MP480P/PMA76	POLE MOUNT ADAPTOR 76MM FOR SE7169MP480NDL							

For terms of catalogue data use, refer to INDEX

SMARTER LIGHTING CHOICES



 SAL National Pty Ltd - 40 Biloela St, Villawood NSW 2163

 + 61 2 9723 3099

 www.sal.net.au

 info@sal.net.au

 VICT/TAS - 46/48 Keys Road Moorabbin VIC 3189

 + 61 3 9532 3168

 info@sal.net.au

 QLD - 36 Whitelaw Place Richlands QLD 4077

 + 61 7 3879 5999

 info@sal.net.au

 SA/NT - 79 Frederick St, Welland SA 5009

 +61 8 7084 1958

 info@sal.net.au

 WA - 29 Beringarra Avenue Malaga WA 6090

 +61 8 9248 7458

 info@sal.net.au



2026/28