

SMARTER LIGHTING CHOICES



SAL Lighting a Smarter Future  




2026/28





A comprehensive range of LED weatherproof luminaires with an extensive selection of wattages, sensor, dimming and mounting options.

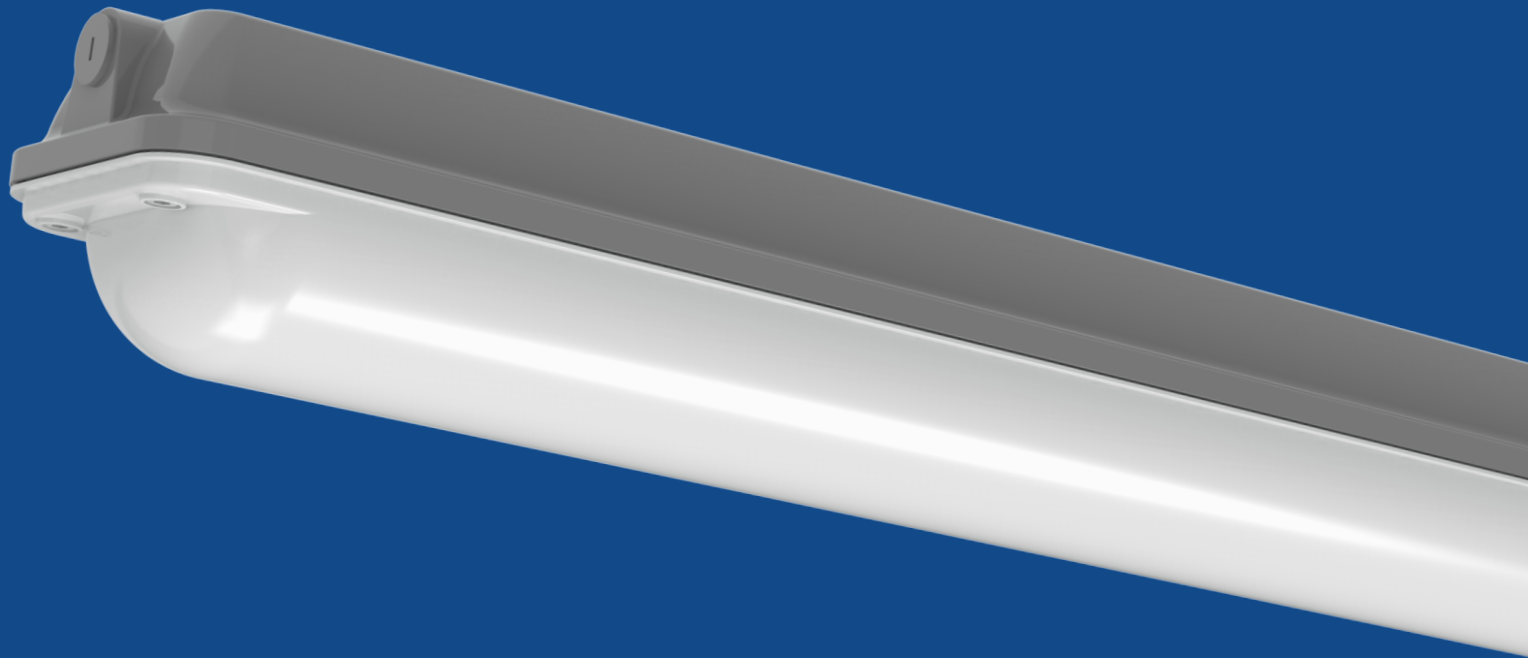

MULTI POWER

TC SELECTABLE COLOUR

BARRACUDA SL9723 TC/MP – 12W/40W

IP66 LED vandal-proof batten, with selectable CCT and power

Application

Commercial or industrial ceiling or suspended mount applications requiring IP66 and IK10 performance

Design Specifications


- Selectable CCT 3000K /4000K /5700K
- Rounded profile design, robust aluminium body and UV stabilized polycarbonate diffuser.
- Integral non-dimmable, multi-power LED driver, 12/21 or 24/40 watt models
- Secure stainless steel fasteners for the diffuser retention, optional accessories - M6 304 stainless steel security screws to fit a T30 TORX key (SL9723TP/SCREW)
- Installation types - (via multiple end or rear conduit access points) Surface mount (standard), or Suspended (two off, SSY1512 wire suspension kits are required).
- Optional emergency models available



Photometric Data

SL9723/20TC/MP/at 3000K

Unit: cd C0/C180 C90/C270

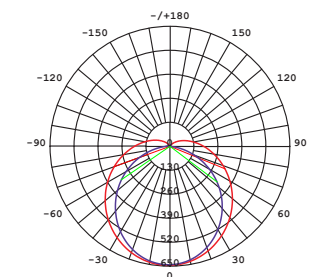

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL9723/20TC/MP	240/50	12	1350/1450/1400	> 80	120°	Grey	698 x 137 x 115
		15	1700/1800/1750				
		18	2000/2150/2100				
		21	2300/2500/2400				
SL9723/40TC/MP	240/50	24	2800/2950/2900	> 80	120°	Grey	1306 x 137 x 115
		30	3450/3650/3550				
		35	4050/4350/4200				
		40	4600/5000/4800				

For terms of catalogue data use, refer to INDEX



TC SELECTABLE COLOUR

GIBRALTAR SL9722/15TC - 15W

IP66 LED vandal proof batten, ceiling mount, 15 watt selectable CCT

Application

Multi-purpose commercial or industrial utility applications

Design Specifications

- Rounded, 92mm profile design, robust UV resistant, (dark grey) nylon construction
- Stainless steel secure fastening screws, IK10 protection
- Operating temperature -20 °C to +40°C
- Integral constant current non-dimmable LED driver, with selectable CCT 3000/4000/5700K
- Large terminal block for easy installation
- Opal polycarbonate diffuser


Performance

- Dimmable - optional, trailing edge, 1-10V, DALI, DSI
- Sensor - optional, microwave




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions (L x W x H mm)
SL9722/15TC	240/50	15	1500/1650/1650	3000/4000/5700	> 80	120°	660 x 92 x 105

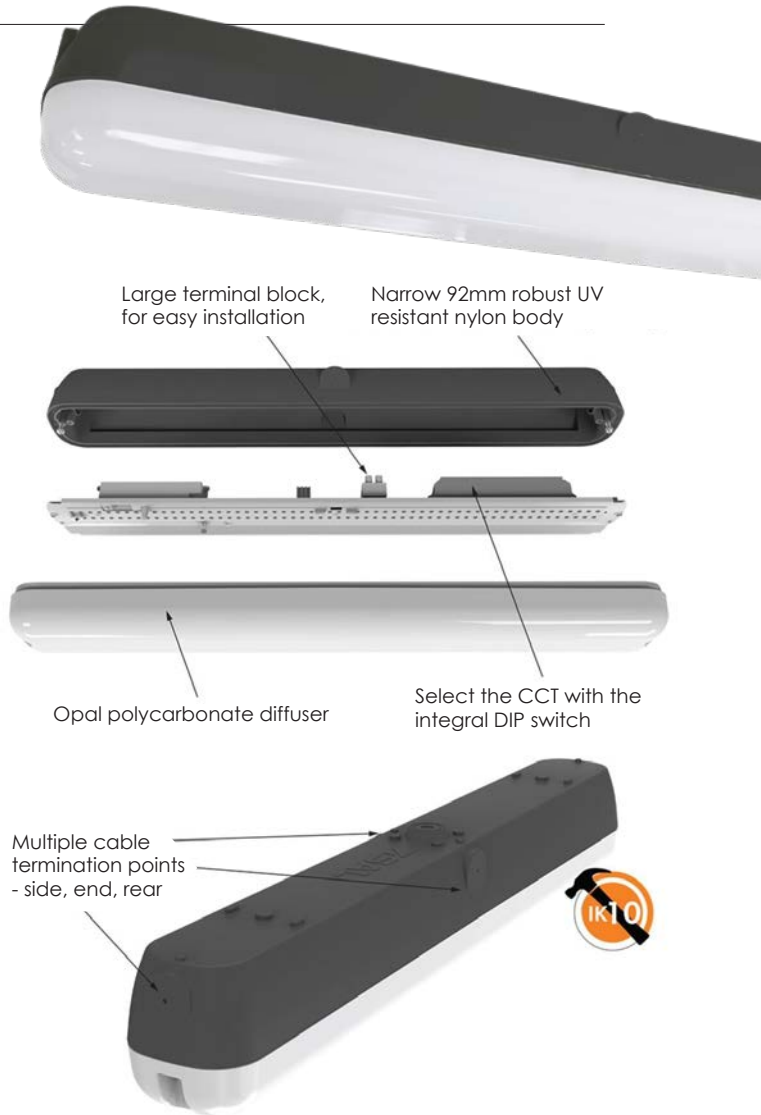

Photometric Data

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270

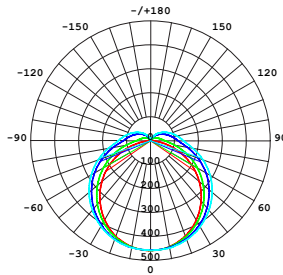

MULTI POWER

TC SELECTABLE COLOUR

COMMANDO SL9722MP TC – 12W/38W

IP66 LED vandal-proof batten, with selectable CCT and power

Application

Multi-purpose commercial or industrial utility applications

Design Specifications

- Integral non-dimmable, multi-power LED driver, 12/20 or 21/38 watt models
- Robust PC body form and opal diffuser
- Two versatile body lengths 20W (660mm) or 38W (1220mm)
- IP66 and IK10 performance
- CRI>80, selectable CCT 3000/4000/5700K
- Beam distribution 140°
- Operating temperature -20 °C to +40°C




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL9722MP20TC	240/50	12 14 17 20	1350/1450/1450 1700/1800/1800 2000/2200/2150 2300/2550/2450	> 80	140°	Grey	660 x 90 x 107
SL9722MP40TC	240/50	21 26 32 38	2800/2900/2850 3450/3600/3500 4100/4350/4200 4700/5050/4800	> 80	140°	Grey	1220 x 90 x 107

SL9722MP20TC




SL9722MP40TC

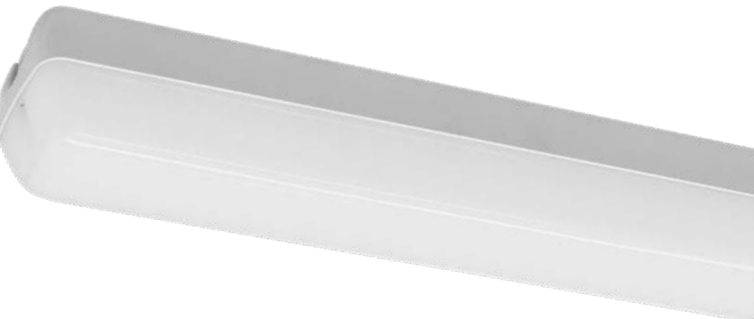

Photometric Data

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270

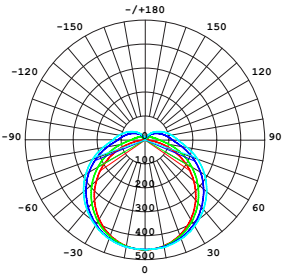



MULTI POWER
TC SELECTABLE COLOUR



KEW II SL9721 TC/MP - 11W/40W

IP65 LED weatherproof batten 11/40 watt
with selectable power and CCT

Application

Multi-purpose ceiling mount or suspended,
commercial or industrial applications

Design Specifications

- Selectable CCT 3000K/4000K/5700K
 - Vandal resistant design, robust polycarbonate body and UV stabilized polycarbonate diffuser
 - 301 Stainless steel clips & screws, IP65, IK08, sensor and emergency options
 - Operating temperature -20°C to +40°C
 - Integral, non-dimmable flickerCONTROLLED LED driver
 - Selectable power choices; 20W - 11/14/17/20 and 40W - 22/28/34/40
 - Optional corridorSTANDBY functions available
- Product selections compliant to AS/NZS2293
Emergency Lighting & Exit Signs are located in the interior and exterior emergency sections of this web catalogue

Performance

- Dimmable - optional, trailing edge, 1-10V, DALI, DSI
- Sensor - optional, microwave


Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL9721/20TC/MP	240/50	11	1450/1450/1450	> 90	120°	Grey	618 x 116 x 74
		14	1850/1850/1800				
		17	2250/2250/2200				
		20	2550/2550/2500				
SL9721/40TC/MP	240/50	22	2900/3000/3150	> 90	120°	Grey	1215 x 116 x 74
		28	3600/3750/3900				
		34	4350/4500/4670				
		40	5050/5250/5400				



Photometric Data

Unit: cd C0/C180 C90/C270

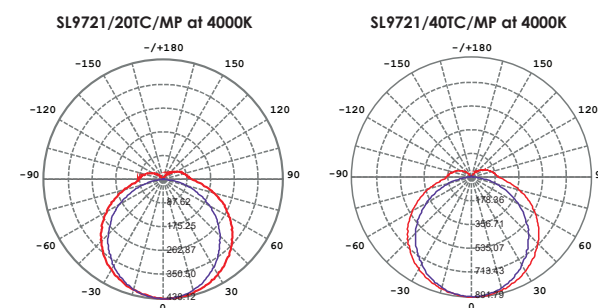

SAL

Sensor Options



Integrated microwave motion sensor



Integrated microwave motion sensor
with corridorSTANDBY function

Emergency Options



Product selections compliant to AS/NZS2293
Emergency Lighting & Exit Signs are located in the interior and exterior emergency sections of this catalogue.

Accessories Included

- Allen key & screws
- PVC cable glands
- Suspension brackets

Installation type

- Surface mounted
- Suspended (Suspension kit is required)

Surface/suspended mounting clips to maintain IP rating



Surface mounting bracket




Suspension bracket



Stainless steel clips can be fastened with extra locking screws for security

For terms of catalogue data use, refer to INDEX



SOL
SL9726 TC/DP - 10W/50W

Premium, IP65 LED weatherproof batten with selectable CCT and power

Application

Commercial or industrial ceiling or suspended mount applications requiring IP65 and IK08 performance

Design Specifications



- Selectable CCT 3000K/4000K/6000K
- Vandal resistant design, robust polycarbonate body and UV stabilized polycarbonate diffuser
- Stainless steel clips & screws
- Integral non-dimmable, dual power LED driver, 10/20 or 20/42 watt models
- Product selections compliant to AS/NZS2293 Emergency Lighting & Exit Signs are located in the interior and exterior emergency sections of this catalogue
- Optional (non-dim) corridorSTANDBY function available

Performance

- Dimmable - optional, trailing edge, 1-10V, DALI, DSI
- Sensor - optional, microwave
- Suspension wire kit - optional



Photometric Data

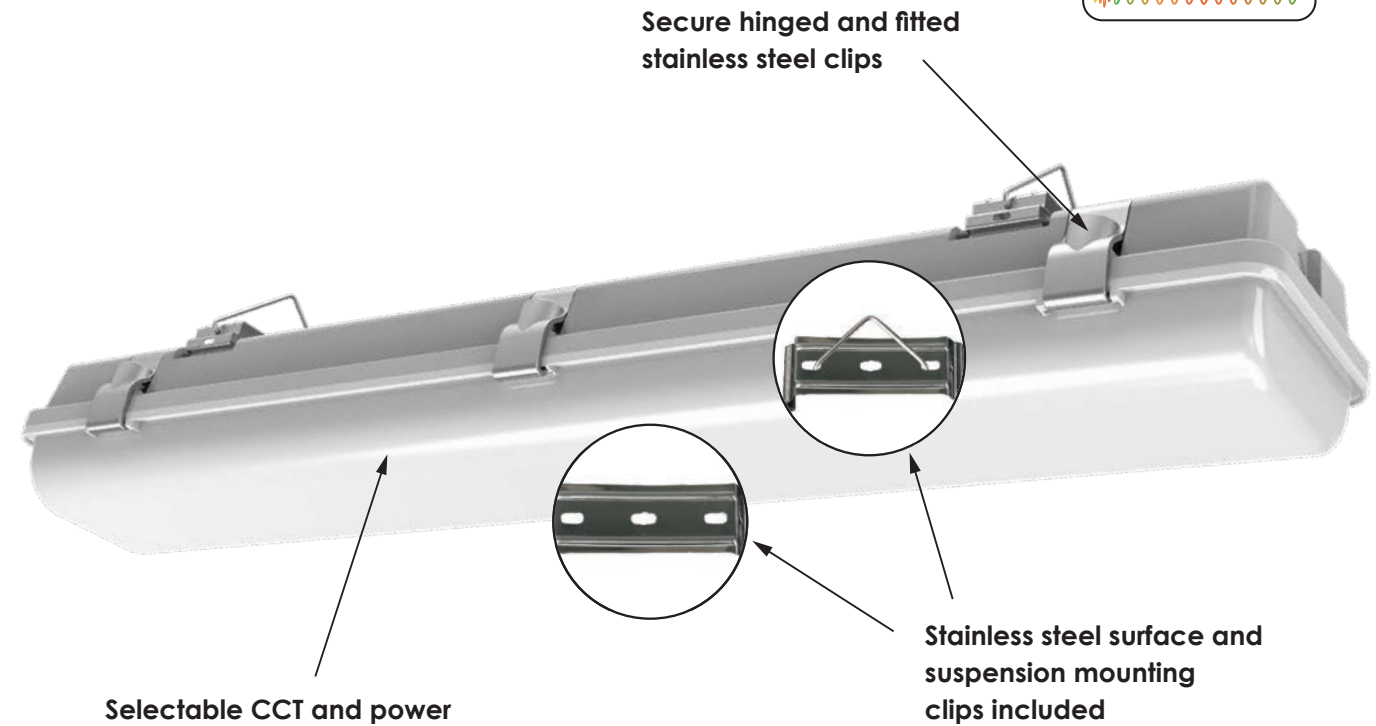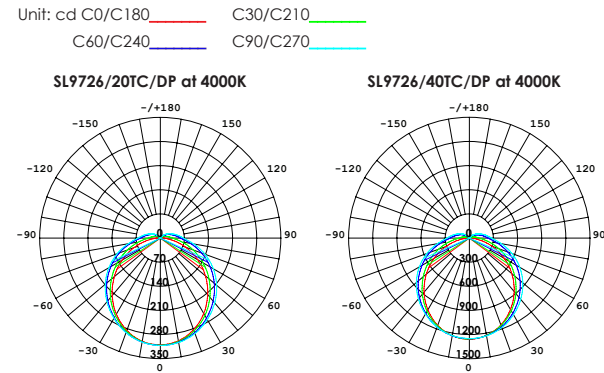

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions (L x W x H mm)
SL9726/20TC/DP	240/50	10/20	1110/1190/1170 2040/2300/2200	3000/4000/6000	> 80	120°	642 x 118 x 77
SL9726P/20TC/C	240/50	20	2220	3000/4000/6000	> 80	120°	642 x 118 x 77
SL9726/40TC/DP	240/50	20/42	2500/2670/2650 4370/4990/4720	3000/4000/6000	> 80	120°	1251 x 118 x 77
SL9726P/40TC/C	240/50	42	4720	3000/4000/6000	> 80	120°	1251 x 118 x 77
SL9726/40TC/S	240/50	20/42	2500/2670/2650 4370/4990/4720	3000/4000/6000	> 80	120°	1251 x 118 x 77
SL9726/40TC/DALI	240/50	42	4720	3000/4000/6000	> 80	120°	1251 x 118 x 77
SL9726/50TC/DP	240/50	30/50	3670/3970/3950 5480/6070/5920	3000/4000/6000	> 80	120°	1551 x 118 x 77
SL9726P/50TC/C	240/50	50	5920	3000/4000/6000	> 80	120°	1551 x 118 x 77

For terms of catalogue data use, refer to INDEX



MULTI POWER

SOL
SL9726 BU/GN & AM/RD - 10W/42W

IP65 LED weatherproof batten with dual colour selections and power

Application

Commercial or industrial ceiling or suspended mount applications requiring IP65 and IK08 performance

Design Specifications

- Dual colour selections Blue or Green, Red or Amber
- Rounded shape vandal resistant design, robust polycarbonate body and UV stabilized polycarbonate diffuser
- 304 Stainless steel clips & screws, 20mm cable gland entry
- Integral constant current non-dimmable LED driver, with dual power selections
- Optional (non-dim) corridorSTANDBY functions available

Performance

- Dimmable - optional
- Sensor - optional, microwave
- Suspension wire kit - optional




Wavelength / CCT

Blue: 450 - 470 nm
Green: 510 - 530 nm
Amber: 1800 K
Red: 615 - 635 nm




MULTI POWER

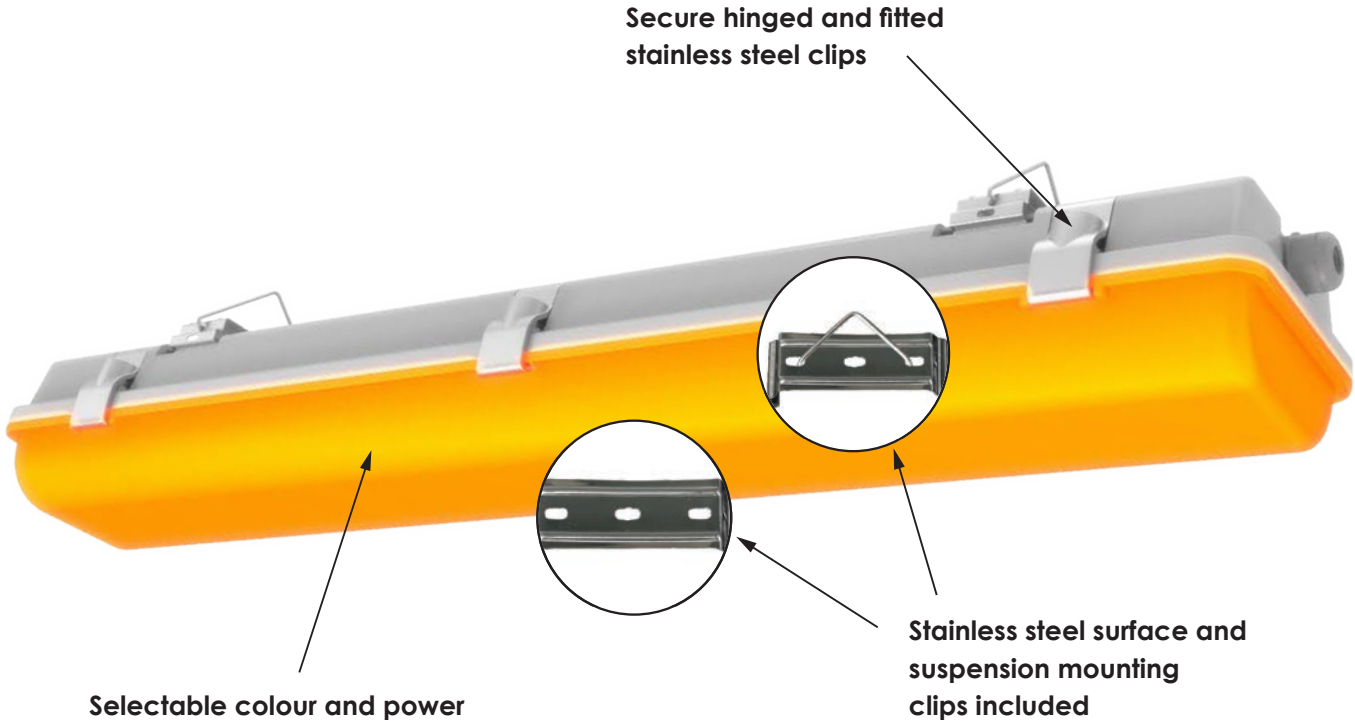

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Body Colour	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL9726/20BU/GN	240/50	10/20	Blue / Green	120°	Grey	642 x 118 x 77
SL9726/20AM/RD	240/50	10/20	Amber / Red	120°	Grey	642 x 118 x 77
SL9726/40BU/GN	240/50	20/42	Blue / Green	120°	Grey	1251 x 118 x 77
SL9726/40AM/RD	240/50	20/42	Amber / Red	120°	Grey	1251 x 118 x 77

For terms of catalogue data use, refer to INDEX



SOL-ECO
SL9725 TC/DP - 10W/40W

IP65 LED weatherproof batten with selectable CCT and power

Application

Commercial or industrial ceiling or suspended mount applications requiring IP65 and IK08 performance

Design Specifications



- Selectable CCT 3000K/4000K/5700K
- Rounded shape vandal resistant design, robust polycarbonate body and UV stabilized polycarbonate diffuser
- Integral constant current non-dimmable, dual power LED driver, 10/20 or 20/40 watt models
- Product selections compliant to AS/NZS2293 Emergency Lighting & Exit Signs are located in the interior and exterior emergency sections of this catalogue

Performance

- Non-dimmable
- Suspension wire kit - optional



Photometric Data

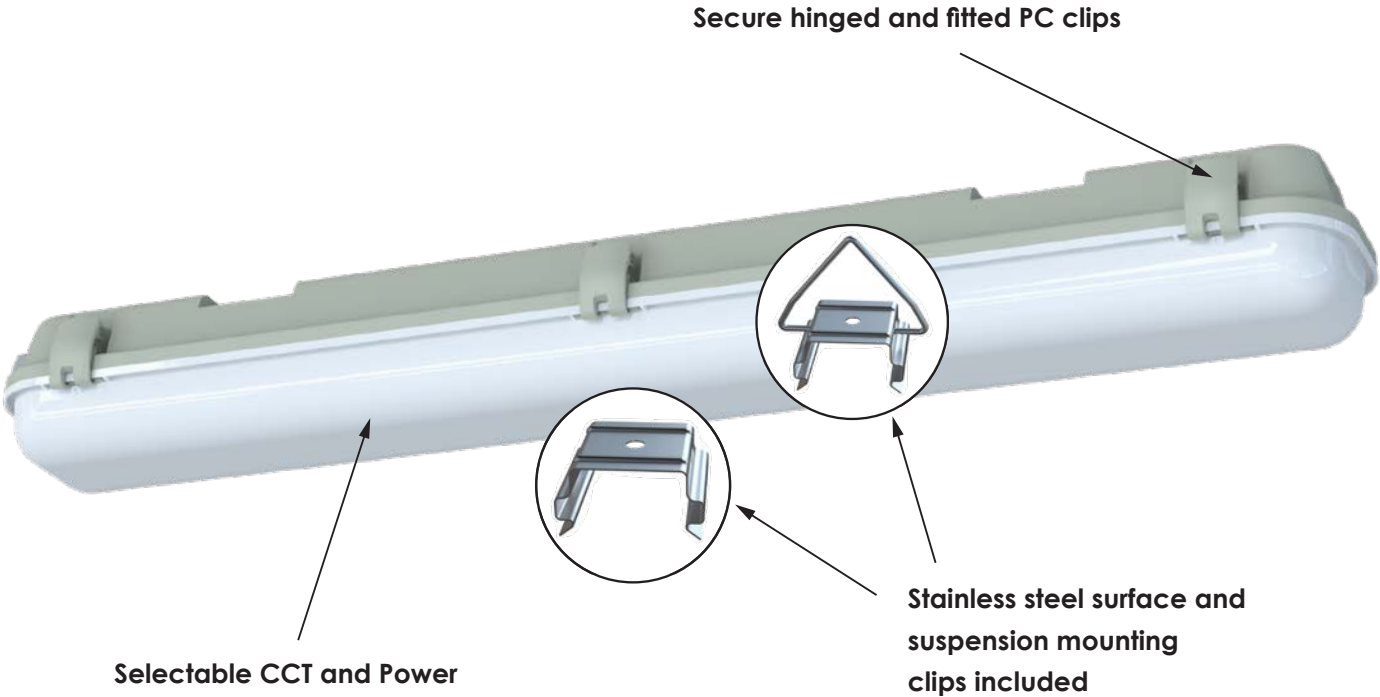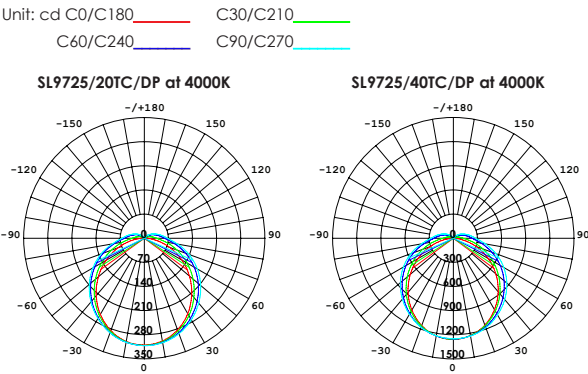

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions (L x W x H mm)
SL9725/20TC/DP	240/50	10/20	1200/1300/1250 2100/2300/2150	3000/4000/5700	> 80	120°	653 x 102 x 73
SL9725/40TC/DP	240/50	20/40	2350/2500/2450 4100/4500/4200	3000/4000/5700	> 80	120°	1253 x 102 x 73

For terms of catalogue data use, refer to INDEX

SMARTER LIGHTING CHOICES



 SAL National Pty Ltd - 40 Biloela St, Villawood NSW 2163

 + 61 2 9723 3099

 www.sal.net.au

 info@sal.net.au

 VICT/TAS - 46/48 Keys Road Moorabbin VIC 3189

 + 61 3 9532 3168

 info@sal.net.au

 QLD - 36 Whitelaw Place Richlands QLD 4077

 + 61 7 3879 5999

 info@sal.net.au

 SA/NT - 79 Frederick St, Welland SA 5009

 +61 8 7084 1958

 info@sal.net.au

 WA - 29 Beringarra Avenue Malaga WA 6090

 +61 8 9248 7458

 info@sal.net.au



2026/28