

Quick Start Guide

SAL

Push Button Switch SWL10L

1. Foreword

IMPORTANT: IN THE INTEREST OF PRODUCT PERFORMANCE AND SAFETY PLEASE READ THESE GUIDE AND WARRANTY INSTRUCTIONS BEFORE INSTALLING THE PRODUCT.



SAL products are designed in accordance with all mandatory International and Australian Standards, which require installation in accordance with AS/NZS3000 by a qualified installer and regular cleaning and maintenance of the equipment. Products are sold in accordance with the following instructions and SAL standard terms and conditions of sale, available via www.sal.net.au.

Due to continued product and information updates, product data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. The product wireframe drawings in this document are intended for illustration purposes only and may differ from the final physical product. The installation instruction is subject to change without prior notice.

2. Product Introduction

SAL Push Button Switch is a mechanical push button ON/OFF switch, with different wiring options to turn on/off its LED indicator.


2.1 Product Features

- Fits most branded switch plates
- Fits 1 to 6 gang wall plate installation
- Same look as PIXIE smart switches under PIXIE ambience cover plate
- Blue LED indicator can be enabled and disabled
- 10AX load rating

2.2 The package includes

- Push Button Switch * 1
- Extra key caps * 2
- Quick Start Guide * 1

2.3 Product illustration*

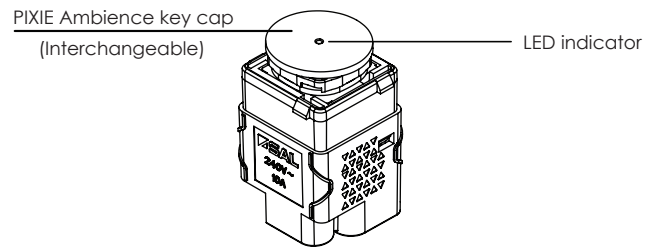


*All drawings shown are for illustration purpose only, actual product may vary due to product enhancement.

3. Specifications


Model No.	Input (V)/(Hz)	Load rating	IP	Colour	Dimension L x W x H (mm)	Wireless
SWL10L	250/50	10AX	20	White	42 x 22 x 22	N/A

4. Wiring and Installation


4.1 LED indicator permanently on (neutral required at switch for LED indicator)

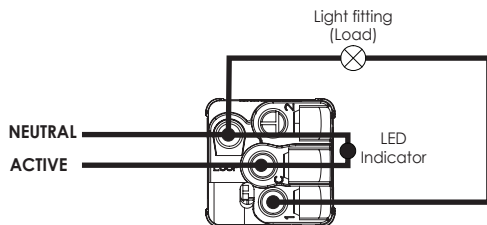


4.2 LED indicator off permanently, on when switch on (neutral required at switch for LED indicator)

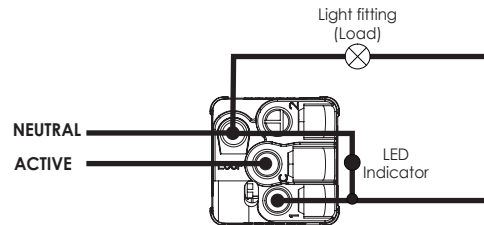

4.3 LED indicator permanently on, off when switch on (no neutral required)

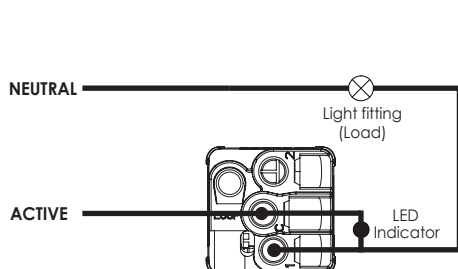

4.4 LED indicator on permanently, off when switch on (neutral required at switch for LED indicator)

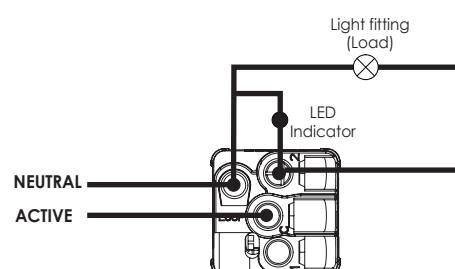

Notes

- The LED indicator is factory built in and is not removable.
- The LED indicator does not have to be connected, if not required.
- If the LED indicator is not required, then no neutral wire is required at the switch.
- The LED indicator wired across switch contacts (in 4.3) may cause some lights to flicker when the switch is turned off. This does not cause any damage to the lights, but can be rectified by using the neutral wire (as per 4.4).

Installation process

- Make sure the key cap compatibility, fit a suitable key cap
- Check and confirm the load compatibility
- Turn OFF the mains electricity supply before commencing installation
- Connect the switch according to the wiring diagram
- Turn ON the mains electricity supply, then test the switch operation by pressing the switch button.

5. Warranty

In accordance with SAL's standard terms and conditions of sale, SAL warrant this product to be free from defects in materials and or workmanship for a period as stated below for goods not subject to incorrect installation, maintenance, operation, mishandling, environmental, unauthorised modifications or electrical operating conditions outside the nominated product specification as detailed in these installation instructions.

The benefits to you given by this warranty are in addition to other rights and remedies you have under law. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Warranty term – Residential usage (12) months, Commercial usage (12) months

5.1 How to make a claim?

Step #1 – Within 30 days of the fault discovery, please contact the original place of the SAL product purchase during standard (local) business hours, with the following information (a) proof of purchase (b) description and quantity of the claimed fault (c) address of installation. (d) operating hours of the product.

Step #2 – It is then the responsibility of the original place of product purchase to report the matter to SAL aftersales;

NSW ACT	SAL National Pty Ltd, 40 Biloela Street Villawood NSW 2163	P # 02 9723 3099
QLD	SAL National Pty Ltd, 36 Whitelaw Place Richlands QLD 4077	P # 07 3879 5999
VICT TAS SA NT	SAL National Pty Ltd, 46-48 Keys Road Moorabbin Victoria 3189	P # 03 9532 3168
WA	SAL National Pty Ltd, 29 Beringarra Av Malaga WA 6090	P # 08 9248 7458

Step #3 - Upon review of your claim and if the product is required to be returned to SAL for technical evaluation, then at the owners expense the product must be returned to SAL as per the above nominated locations.

Step #4 - Pending the evaluation, the claim will be validated resulting in the product being repaired or replaced with the same or best equivalent product at the discretion of SAL, or rejected if the product fault was found to be caused by conditions beyond the responsibility of SAL warranty obligations. Consideration of installation, product removal, return freight and or testing fees are not the responsibility of SAL.

6. Scan the QR code to access the full product information

